

April 14, 2025

Received in RRS
April 14, 2025

Mr. Karl Alexy
Associate Administrator for Railroad Safety and Chief Safety Officer
Federal Railroad Administration
1200 New Jersey Avenue SE
Washington, DC 20590

Dear Mr. Alexy:

Metra's Positive Train Control (PTC) Implementation Plan identifies its ultimate goal of supplanting cab signals with PTC technology. In such a configuration, the PTC system will interface directly with the existing underlying Traffic Control or Automatic Block Signal systems, which will remain in place to support PTC overlay operation. Metra believes that PTC system operation and reliability will be improved if the onboard and wayside components of the cab signal subsystem are removed from the control systems. Furthermore, Metra believes the potential confusion to the train crew of having two train control systems operating simultaneously would be avoided in the proposed operation. Further justification is provided below.

Metra is submitting this Block Signal Application (BSAP) for discontinuance of cab signals and relief from 49 CFR §236.566 (*Locomotive of each train operating in train stop, train control or cab signal territory; equipped*) for operation on its Rock Island District. Under the conditions identified below, such relief will allow the operation of PTC without Automatic Cab Signals (ACS).

The following information is submitted in accordance with the provisions contained in 49 CFR §211.71, §211.55 §235.10, and §235.12:

(1) Corporate Name of Each Applicant

Northeast Illinois Regional Commuter Railroad Corporation. (Does Business as Metra)

(2) Manner in which Applicant is Involved

Metra is the owning, maintaining, and operating railroad.

(3) Location of Project

Locations on the Rock Island District are as follows:

Track No. 1	Westward -	MP 15.58 to MP 39.03
	Eastward -	MP 39.03 to MP 15.58
		MP 15.58 Metra Electric Con
		MP 28.11 Schilling Spur
		MP 29.59 Mokena MOW Spur
		MP 34.08 New Lenox MOW Spur
		MP 39.03 MOW Spur
Track No. 2	Westward -	MP 15.58 to MP 39.03
	Eastward -	MP 39.03 to MP 15.58
		MP 20.95 Oak Forest MOW Spur
		MP 23.54 MOW Spur
		MP 27.00 Ozinga Spur
		MP 32.49 MOW Spur Anderson Road
		MP 38.74 EJ&E CN Con

Enclosed with this petition, please find a copy of the Metra:

1. Metra System Special Instructions No. 1
2. General Order 7, modifications to Metra System Special Instructions NO.1
3. Rock Island District PTC track charts

for all hand-throw switches within the designated project limits.

(4) Tracks Involved

All Main Tracks and Controlled sidings are noted above.

(5) Description of Proposed Relief Sought

Metra requests relief from CFR §236.566 (*Locomotive of each train operating in train stop, train control or cab signal territory; equipped*) as it applies to the operation of Automatic Cab Signals (ACS) on locomotives operating within the project limits and on which

- (1) a PTC system is installed and operative;
- (2) the PTC system is successfully initialized; and
- (3) a locomotive engineer trained and qualified in the operation of PTC is present for the operation of the train.

The PTC system to be utilized is Metra's Interoperable Electronic Train Manager System (IETMS®), as described by PTC Type Approval FRA-TA-201 1-02-C and its associated PTC Development Plan (PTCDP).

(6) Justification for Relief from the Requirements

The ACS and PTC systems are not integrated on the locomotive. Their concurrent use could confuse and distract the train crew due to differences in the content of their displays, audible and visual alerts provided, and required acknowledgment protocols. Furthermore, the reliability of PTC operation will be enhanced if the onboard cab signal equipment is not present. This will remove conflicting information displayed in the event a WIU is not communicating and the I-ETMS requires a train to reduce speed or stop when the ACS system indicates that it should proceed. I-ETMS will be the overriding authority in these instances.

The PTC system provides a set of safety functions which include and exceed those provided by the existing ACS system. The use of PTC in lieu of ACS will allow for safety functions to be realized, including the positive enforcement of electrically locked switches not positioned for safe train movement.

There are no other Metra ACS territories adjacent to the project limits, and the project limits are entirely within one district. Thus, no complexities related to the removal of ACS in PTC operation territory would exist.

(7) Approximate Dates of Beginning and Completion of Project

Metra holds authority from FRA to operate PTC in Revenue Service Demonstration (RSD) on the Rock Island District, including the project limits. Metra has been operating in Revenue Service on the Rock Island District since October 2018.

All hand throw switches are monitored by PTC, electrically locked, and approach locking is in effect in the project limits. If Metra is granted relief under this BSAP for ACS removal, upon receiving approval, Metra will retire the ACS system and commence operation of PTC without ACS.

(8) Changes in Operating Practices

Metra will develop and promulgate operating rules and procedures with the following effect:

The engineer of any train with a PTC-equipped controlling locomotive whose tour of duty will include operation over the Rock Island District will be instructed to initialize the PTC system at his/her outbound on-duty location (e.g. LaSalle Street, Blue Island, or Joliet) prior to departing and operate the train under the provisions of 236.1029 (PTC system use and failures)

(9) Effect on Safety of Operations

Operation of PTC within the project limits will provide a level of safety for equipped trains that exceeds that provided by ACS. Additionally, all hand throw switches are monitored by PTC, electrically locked, and approach locking is in effect. Metra has not identified any scenarios where PTC, in lieu of ACS, will result in a reduction in safety.

(10) Conformance with FRA. Rules and Regulations

The operation of PTC and the removal of ACS systems will comply with the FRA's Rules, Standards, and Instructions, as published in Title 49, Part 236.

Sincerely,



Scott C. Schiemann, PE
Chief Engineering Officer

SCS/AB

Enclosures

Northeast Illinois Railroad Corporation



System Special Instructions No.1

Effective April 1, 2020
Superseding System Timetable No.3
FOR THE GOVERNMENT OF EMPLOYEES ONLY

B. M. Marcheschi – Deputy Executive Director Operations
M. J. Ryan – Chief Transportation Officer
C. M. Krakar – Chief Engineering Officer

Safety Policy Statement

At Metra, safety is our number one priority. We are committed to providing working conditions that promote a safe and healthy work environment for our employees and to ensure that we provide our customers, the general public, and the communities we serve with the safest, most reliable, and efficient transportation possible.

Safety encompasses every part of our operation and is every employee's primary responsibility. Supervisors are to recognize the value in promoting a safety-first culture, where mentoring employees is essential to ensuring that all safety rules and procedures are followed. Equally, employees are to recognize that safety is an essential component of every task they perform and must never be compromised.

Complying with Metra's safety rules and procedures is essential to attaining these goals. Supervisors and employees must remain committed in maintaining a work environment free from hazards and are empowered to work collectively to implement safety initiatives that promote work place safety to reduce and eliminate accidents and incidents.

Many accidents and incidents are preventable. For this reason, employees must be committed in taking every precaution necessary to ensure their safety and the safety of others. Employees must remain personally engaged and steadfast in promoting a safe work environment.

Sharing in these responsibilities is essential to the safety of our employees, our customers, and the general public.

A handwritten signature in black ink, appearing to read "Jim Derwinski", with a stylized flourish at the end.

Jim Derwinski CEO/Executive Director

TABLE OF CONTENTS

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS	1
STATIONS – <i>Chicago - MP 0.0 to End NIRC - MP 40.6</i>	1
MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES	2
MAXIMUM AUTHORIZED SPEEDS AND PERMANENT SPEED RESTRICTIONS	3
OTHER SPECIAL INSTRUCTIONS	4
BEVERLY SUB DISTRICT SPECIAL INSTRUCTIONS	13
STATIONS – <i>Gresham Junction - MP 9.9 to Western Ave. Junction - MP 16.6</i>	13
MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES	13
MAXIMUM AUTHORIZED SPEEDS	14
PERMANENT SPEED RESTRICTIONS	14
OTHER SPECIAL INSTRUCTIONS	14
SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS	18
STATIONS – <i>23rd Street - MP 1.7 to End of Track - MP 40.7</i>	18
MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES	19
MAXIMUM AUTHORIZED SPEEDS AND PERMANENT SPEED RESTRICTIONS	19
OTHER SPECIAL INSTRUCTIONS	20
UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS	27
UNIVERSITY PARK SUB DISTRICT	28
STATIONS – <i>Randolph Street - MP 0.00 to University Park - MP 31.50</i>	28
MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES	29
MAXIMUM AUTHORIZED SPEEDS AND PERMANENT SPEED RESTRICTIONS	29
SOUTH CHICAGO SUB DISTRICT	30
STATIONS – <i>67th Street - MP 8.33 to South Chicago - MP 13.13</i>	30
MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES	30
MAXIMUM AUTHORIZED SPEEDS AND PERMANENT SPEED RESTRICTIONS	30
BLUE ISLAND SUB DISTRICT	31
STATIONS – <i>Kensington - MP 14.49 to Blue Island - MP 18.95</i>	31
MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES	31
MAXIMUM AUTHORIZED SPEEDS AND PERMANENT SPEED RESTRICTIONS	31
OTHER SPECIAL INSTRUCTIONS	32
SYSTEM SPECIAL INSTRUCTIONS	52
EQUIPMENT AND SPEED RESTRICTIONS	52
MODIFICATIONS TO THE GENERAL CODE OF OPERATING RULES	53
MEDICAL SERVICES INFORMATION	88
INJURY, ILLNESS, ACCIDENT AND INCIDENT REPORTING	89
ROADWAY SIGNS, TRACK FLAGS, BANNERS AND MAIN TRACK SWITCH TARGETS	90
BLOCK AND INTERLOCKING SIGNALS	92
SPECIAL ASPECTS WHICH ARE NOT PART OF THE ABS, CTC AND INTERLOCKING SYSTEMS	93
SPEED AND DISTANCE TABLES	94
TELEPHONE LISTING	INSIDE BACK COVER

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

JOLIET SUB DISTRICT RADIO FREQUENCY 161.340 - AAR CHANNEL #82

Terminal Dispatcher - Chicago has jurisdiction between La Salle Street and east interlocking limits at Gresham Junction.
Road Dispatcher - Chicago has jurisdiction between east interlocking limits Gresham Junction and END NIRC at MP 40.6.

	Mile Posts	STATIONS	Rule 4.3	Type of Operation	Control of Manual Interlockings and Control Points	WWD Miles to Next Station	
W E S T W A R D ▼	0.0	La Salle Street	ABDFMPRWY	Other Than Main Track & Manual Interlocking	Terminal Dispatcher	0.3	▲ E A S T W A R D
	0.3	Chicago Terminal	MX(2)	Manual Interlocking		0.7	
				3 MT - CTC			
	1.1	16th Street Tower CN Crossing, JCT SCAL	BFJMPRX(2)	Manual Interlocking	Control Operator 16th Street Tower	2.0	
	3.1	35th Street/"Lou" Jones	DW	2 MT- CTC	Terminal Dispatcher	0.7	
	3.8	CP Pershing JCT CRL,	HJTX(2)	3MT - CTC		0.4	
	4.2	CP Wash Track No. 3 Only	HX			0.3	
	4.5	CP 46th Street	EHYX(2)			1.0	
	5.5	CP 54th Street	HYX	2 MT - CTC		1.2	
	9.0	CP 81st Street	HX(2)			0.8	
	9.8	Gresham	D			0.1	
	9.9	Gresham Junction JCT Beverly Sub Dist, CRL	JMTX(2)	Manual Interlocking	Road Dispatcher	1.0	
	10.9	95th Street	DW	2 MT - CTC	Road Dispatcher	1.1	
	12.0	103rd Street	DW			2.3	
	14.3	Purington	Y			1.3	
	15.6	MED Connection JCT Metra Electric District	J			0.1	
	15.7	Blue Island	ABDFMPRTWY	Manual Interlocking Track No. 1 MP 15.71 - 17.42 Track No. 2 MP 15.53 - 17.42	Control Operator Blue Island	0.2	
	15.9	Western Ave. Junction JCT Beverly Sub Dist	JMX(2)			0.8	
	16.7	Interchange	MX			0.2	
	16.9	Robbins PS	DW			0.4	
	17.3	Robbins JCT CSXT	JMX(2)			1.1	
	18.4	Midlothian	ADPW	2 MT- CTC	Road Dispatcher	2.0	
	20.4	Oak Forest	ADPW			2.9	

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

JOLIET SUB DISTRICT Continued

	Mile Posts	STATIONS	Rule 4.3	Type of Operation	Control of Manual Interlockings and Control Points	WWD Miles to Next Station	
	23.3	CP 66th Court	HX(2)		Road Dispatcher	0.2	
WESTWARD ▼	23.5	Tinley Park	ADPW	2 MT- CTC		1.5	▲ EASTWARD
	25.0	80th Avenue	ADPW			2.2	
	27.2	Hickory Creek	DW			2.4	
	29.6	CP Mokena	DHWX(2)			4.4	
	34.0	New Lenox	ADPW			1.5	
	35.5	CP 35.5	HX(2)			3.4	
	38.9	EJ&E Crossing <i>CN Crossing, JCT CN</i>	JM	Manual Interlocking		0.6	
	39.5	CP Miller Street	HX	2 MT – CTC		0.4	
	39.9	CP Richards Street <i>End 2 Main Tracks, Coach YD lead, TRK 1 S, JCT UP</i>	BFHPY	CTC		0.2	
	40.0	Joliet Station	ABDPW			0.1	
	40.1	U.D. Tower BNSF-UP Crossing, JCT UP	JM	Manual Interlocking		0.1	
	40.2	JOLIET	J	ABS- Yard Limits MP 40.2- MP 40.6		0.4	
	40.6	END NIRC JCT CSXT	J				

6.26 MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES

- Positive Train Control (PTC) is in service on the Joliet Subdivision between Chicago Terminal MP 0.30 and Joliet MP 40.6
- Three main tracks are in use between Chicago Terminal and 16th Street Tower and between CP Pershing and CP 46th Street. Main Tracks are numbered from South to North as Track No. 1, Track No. 2 and Track No. 3.
- Two main tracks are in use between 16th Street Tower and CP Pershing and between CP 46th Street and CP Richards Street. Main Tracks are numbered from South to North as Track No. 1 and Track No. 2.
- Main tracks end: La Salle Street - East interlocking limits Chicago Terminal.
CP 46th Street - Track No. 3 – At EWD absolute signal.
- Yard limits are in effect between MP 40.2 and MP 40.6

Between	Track(s)	Direction	Signal System	Rules in Effect
Chicago Terminal and 16th Street Tower	1, 2 and 3	Both	CTC	10.1-10.3.4
16th St. Tower and CP Pershing	1 and 2	Both	CTC	10.1-10.3.4
CP Pershing and CP 46th Street	1, 2 and 3	Both	CTC	10.1-10.3.4
CP 46h Street and CP Richards Street	1 and 2	Both	CTC	10.1-10.3.4
CP Richards Street and MP 40.1	Main	Both	CTC	10.1-10.3.4
MP 40.2 to MP 40.6	Main	Both	ABS	6.13

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

	PSGR	FRT
6.31 MAXIMUM AUTHORIZED SPEED	79 MPH	30 MPH
6.31.1 PERMANENT SPEED RESTRICTIONS		
La Salle Street (End of Track) to Signal Bridge A	10	10
Signal Bridge A to Signal Bridge B	25	10
Signal Bridge B to MP 1.1	30	10
MP 1.1 to MP 1.7	50	30
Except: CN Crossing at 16th Street Tower	20	10
On SCAL Connection Track at 16th Street Tower	10	10
MP 1.7 to MP 2.3	70	30
MP 3.8 to MP 4.6 - Track No. 3	25	25
Connection Tracks to Beverly Sub		
Connection Track No. 2 - MP 9.82 to MP 10.00	25	25
MP 10.00 to MP 10.12 – Through Curve	20	20
Connection Track No. 1- MP 9.93 to MP 10.00	25	25
MP 10.00 to MP 10.12 – Through Curve	20	20
MP 15.0 to MP 16.4	60	30
MP 27.25 to MP 28.04	60	30
Headend Restriction (HER) for Westbound Movements until train passes signal West of 191st crossing at MP 28.04 on Main Tracks No. 1 and 2.		
MP 31.1 to MP 31.5	65	30
MP 33.8 to MP 34.4	60	30
MP 36.6 to MP 37.8	70	30
MP 38.9 to MP 40.1	40	30
Except: On UP Connection Track at U. D. Tower	10	10
MP 40.1 to MP 40.6	25	20
Other than Main Track	10	10
Except: MP 4.2 to MP 4.6 - On the Wash Lead at 47th Street Yard	15	10
Joliet Coach Yard on All Tracks	5	5

SPEED THROUGH TURNOUT OF SWITCHES

Through No. 15 Switches at Following Locations:	25	25
MP 1.2 16th Street Tower Interlocking - All Switches Except SCAL Connection Switch		
MP 3.8 CP Pershing – Connection Between Main No. 2 and Main No. 3		
MP 4.4 and MP 4.6 CP 46th Street - Crossovers Between Main No. 1 and Main No. 2		
MP 5.5 CP 54th Street - Crossover Between Main No. 1 and Main No.2		
MP 9.8 and MP 9.9 Gresham Junction - Switches to Beverly Connection WWD Track and EWD Track		
MP 9.8 and MP 10.5 Gresham Junction - Crossovers Between Main No. 1 and Main No. 2		
MP 10.3 Gresham Junction - Switch to South Wye Connection		
MP 15.7 and MP 15.8 Blue Island Interlocking - Crossover Between Main No. 1 and Main No.2. West of Grove Street		
MP 16.0 and MP 16.1 Western Avenue Junction - Crossover Between Main No.1 and Main No.2		
MP 17.3 and MP 17.4 Robbins - Crossovers Between Main No.1 and Main No.2		
MP 29.6 and MP 29.7 CP Mokena - Crossovers Between Main Tracks		
Through No. 20 Switches at Following Locations:	40	30
MP 3.7 and MP 3.8 CP Pershing - Crossovers between Main Tracks No. 1 and No. 2		
MP 8.9 and MP 9.1 CP 81st Street - Crossovers Between Main Tracks		

SPEED THROUGH TURNOUT OF SWITCHES Continued

MP 23.2 and MP 23.3 CP 66th Court - Crossovers Between Main Tracks		
MP 35.3 and MP 35.5 CP 35.5 - Crossovers Between Main Tracks		
MP 39.9 CP Richards Street - Switch at End of 2 Main Tracks		
Through Turnout of All Switches Not Otherwise Specified	10	10

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

JOLIET SUB DISTRICT INTERLOCKINGS AND CONTROL POINTS

Station	Controlled By	Type of Operation	East Limits	West Limits
Chicago Terminal	Terminal Dispatcher	Manual Interlocking	0.23	0.47
16 th Street Tower	Control Operator-16 th Street	Manual Interlocking	0.93	1.25
CP Pershing	Terminal Dispatcher	Control Point	3.67	3.93
CP Wash	Terminal Dispatcher	Control Point	TRK 3 - 4.17	TRK 3 - 4.21
CP 46 th Street	Terminal Dispatcher	Control Point	4.42	4.61
CP 54 th Street	Terminal Dispatcher	Control Point	5.40	5.54
CP 81 st Street	Terminal Dispatcher	Control Point	8.85	9.15
Gresham Junction	Road Dispatcher	Manual Interlocking	9.82	10.50
Blue Island	Control Operator – Blue Island	Manual Interlocking	TRK 1 - 15.71	17.42
Blue Island	Control Operator – Blue Island	Manual Interlocking	TRK 2 - 15.53	17.42
CP 66 th Court	Road Dispatcher	Control Point	23.12	23.29
CP Mokena	Road Dispatcher	Control Point	TRK 1 - 29.57	29.83
CP Mokena	Road Dispatcher	Control Point	TRK 2 - 29.56	29.83
CP 35.5	Road Dispatcher	Control Point	35.34	35.50
EJ&E Crossing	Road Dispatcher	Manual Interlocking	38.91	38.98
CP Miller	Road Dispatcher	Control Point	39.44	39.57
CP Richards	Road Dispatcher	Control Point	39.73	39.90
UD Interlocking	Road Dispatcher	Manual Interlocking	40.12	40.19

ENHANCED FOCUS CROSSOVER LOCATIONS

MP 3.8 CP Pershing - Crossover to Track No. 3

MP 4.5 CP 46th Street

MP 5.5 CP 54th Street

MP 9.9 Gresham Junction - Does not apply to EWD trains from the Beverly Sub Dist

MP 10.4 Gresham Junction

1.3.3 CIRCULARS, INSTRUCTIONS, AND NOTICES

Tower Operator Notices will be numbered consecutively and will be issued and cancelled by the Director-Operations. They will contain information and instructions for control operators and tower operations.

1.20 ALERT TO TRAIN MOVEMENT

At Joliet Coach Yard

- Equipment stored on Track No. 7 fouls Track No. 8 on the west end. Equipment tying up on Track No. 7 must spot the locomotive with the locomotive pilot covering the Track 7/8 switch; aligned with, but not beyond, the switch points.
- Equipment stored on Track No. 4 fouls Track No. 3 on the east end.

Employees are prohibited from riding the sides of passenger cars or locomotives within Joliet Coach Yard.

1.22 NOT PERMITTED ON EQUIPMENT

Crews on Assignments 502/702, 503/703 and 504/704 may exceed four persons in the locomotive cab between Chicago Terminal and 51st Street Yard.

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

1.39 ACCURACY OF SPEED INDICATOR

Speed Test Sections

Measured test sections, subdivided into 1/4-mile segments and identified by Speed Test Section Signs, are located:

			1/4 MILE SPEED TABLE	
Location	Track	Direction	Miles Per Hour	Seconds Per 1/4 Mile
MP 2.5 to MP 3.5	Both Main Tracks	Both	45	20
MP 8.0 to MP 9.0	Both Main Tracks	Both	50	18
MP 12.5 to MP 13.5	Both Main Tracks	Both	55	17
MP 28.0 to MP 29.0	Both Main Tracks	EWD	60	15
MP 36.0 to MP 37.0	Both Main Tracks	EWD	65	14
			70	13
			75	12

1.44 DUTIES OF TRAIN DISPATCHERS

The Rock Island Terminal Dispatcher has jurisdiction between La Salle Street and the east interlocking limits at Gresham Junction.

The Rock Island Road Dispatcher has jurisdiction between the east interlocking limits at Gresham Junction and END NIRC at MP 40.6.

1.47D DUTIES OF CREW MEMBERS - OBSERVE AND CALL SIGNALS

The provisions of System Special Instruction 1.47D do not apply between Chicago and Chicago Terminal - Bridge B. On equipment trains, a Train Crew member must occupy the control compartment of the train with the Engineer. These instructions do not apply to equipment trains operating between LaSalle St. and 51st Street Coach Yard.

1.47.3 APPROACHING STATIONS AND TERMINALS WITH BUMPING POST Add New Rule:

On Passenger Trains entering LaSalle Street Station:

- The Locomotive Engineer will initiate a radio transmission at Signal Bridge "A".
- At Signal Bridge "A", the Conductor must be positioned in a vestibule to take appropriate action if communication is not established prior to entering a depot track.

2.7 MONITORING RADIO TRANSMISSIONS

The following radio channels are in use:

AAR Channel	Location	Frequency
01-01	47th Street Yard - Mechanical Department	161.610
82-82	La Salle Street to END NIRC	161.340
33-33	PTC Help Desk (MTAC) - CCF	160.605

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

6.0 MOVEMENT OF TRAINS AND ENGINES

Where Stop Will Be Made at La Salle Street

Stop signs are mounted 12 feet from the bumping post on Track Nos. 1, 3, 5 and 7. Movements on all tracks must stop at or west of these stop signs.

Movement Through Successive Crossovers

Trains must not be routed through successive crossovers when the distance between such crossovers is less than 80 feet and route returns train to original track. Locations where this applies:

MP 0.5 - Chicago Terminal	MP 23.2 and MP 23.3 - CP 66th Court
MP 1.0 - 16th Street Tower - East of CN Crossing	MP 29.6 and MP 29.7 - CP Mokena
MP 17.2 and MP 17.3 - Robbins	MP 35.3 and MP 35.4 - CP 35.5

6.4.2 MOVEMENTS WITHIN CONTROL POINTS OR INTERLOCKINGS

Chicago Terminal Interlocking - All crews making "short moves" within Chicago Terminal Interlocking must receive permission for reverse movement from the train dispatcher.

Blue Island Interlocking - Passenger trains turning will be governed as follows:

- **Track No. 1 and Track No. 2** - After changing ends, passenger trains turning on Track No. 1 or Track No. 2 within Blue Island Interlocking are required to receive permission from the control operator to change direction.
- **5 Siding** - After changing ends, passenger trains turning on 5 siding within Blue Island Interlocking may accept signal indication for eastward movement and are not required to receive permission from the control operator to change direction unless a moveable part of the interlocking lies between the east end of train and the next signal in advance.

6.13 YARD LIMITS

At Joliet –

- Westward Trains at MP 40.1 may proceed on signal indication or verbal authority from Metra Rock Island Road Dispatcher to occupy yard limits.
- Eastward trains must contact Metra Rock Island Road Dispatcher before occupying Yard Limits at MP 40.6

6.21 PRECAUTIONS AGAINST UNUSUAL CONDITIONS

Be governed by the provisions of System Special Instruction 6.21.3 (Flash Flood Warnings) at the following locations:

- MP 17.8 - Midlothian Creek
- MP 19.6 - Midlothian Creek
- MP 33.5 - Under NS Overhead Bridge
- MP 36.7 to MP 37.1 - Hickory Creek
- MP 37.7 - Hickory Creek

6.30 RECEIVING OR DISCHARGING PASSENGERS

Item A of System Special Instruction 6.30 (Receiving or Discharging Passengers) does not apply at Gresham, 35th Street. / "Lou" Jones or Tinley Park 80th Avenue.

6.32.2 AUTOMATIC WARNING DEVICES

At Blue Island - The automatic warning devices at Vermont Street, MP 15.61, and Grove Street, MP 15.7 can also be controlled manually by the control operator at Blue Island. Control operator must not raise gates which have lowered for an approaching train until the train has stopped clear of the crossing.

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

At CP Mokena - The automatic warning devices at Mokena Street, MP 29.6, and Wolf Road, MP 29.8, will not activate when a proceed indication is displayed for trains stopped at the absolute signals of CP Mokena. Trains stopped at the absolute signals of CP Mokena will be governed by the following instructions:

- **WESTWARD TRAINS ON BOTH MAIN TRACKS**
After the absolute signal at MP 29.5 displays a proceed indication for a westward train which has stopped at the signal, the leading trucks of the movement must pass the signal before the automatic warning devices will activate.
- **EASTWARD TRAINS ON BOTH MAIN TRACKS**
After the absolute signal at MP 29.8 displays a proceed indication for an eastward train which has stopped at the signal, the leading truck of the movement must pass the signal before the automatic warning devices will activate. The distance from the eastward absolute signals to the center of Wolf Road is 60 feet.

Trains must not foul the crossings until the warning devices have been operating long enough to provide warning and the crossing gates are fully lowered.

9.1 SIGNAL ASPECTS AND INDICATIONS

At La Salle Street - Station track occupancy indicators will display aspects in accordance with System Special Instructions Rules 9.1.20 and 9.1.21.

At CP Pershing - Rule 9.1.9 Diverging Approach, Aspect Red over Red over Yellow, and Rule 9.1.10 Diverging Clear, Aspect Red over Red over Green, will be displayed for westward movements routed from Track No.1 or Track No.2 through the 25 MPH crossover to Track No. 3. The signals in advance will display Rule 9.1.7 Approach Diverging, Aspect Yellow over Green, for this routing.

At CP 46th Street - Rule 9.1.9 Diverging Approach, Aspect Red over Red over Yellow, and Rule 9.1.10 Diverging Clear, Aspect Red over Red over Green, will be displayed for eastward movements routed from Track No. 1 or Track No. 2 through the 10 MPH crossover to Track No. 3. The signals in advance will display Rule 9.1.7 Approach Diverging, Aspect Yellow over Green for this routing.

9.2.1 VIEW OF SIGNALS

The requirement of System Special Instruction 9.2.1 (View of Signals) regarding passenger stops apply to:

- **Westward Trains At**
 - LaSalle Street All Tracks
 - Gresham Both Main Tracks
 - Blue Island Both Main Tracks
- **Eastward Trains At**
 - Blue Island Main Track No. 2
 - Robbins PS Both Main Tracks
 - Tinley Park Both main Track

9.13.2 LOCATION OF DUAL CONTROL SWITCHES

Chicago Terminal	All Switches	Blue Island-Western Ave.	
16th Street Tower	All Switches East of CN Crossing	Jct.-Interchange-Robbins	All Switches*
CP Pershing	All Switches	CP 66th Court	All Switches
CP Wash	Switch to the Wash Lead	CP Mokena	All Switches
CP 46th Street	All Switches	CP 35.5	All Switches
CP 54th Street	All Switches	CP Miller Street	All Switches
CP 81st Street	All Switches	CP Richards Street	All Switches
Gresham Junction	All Switches		

* - Except first crossover between main tracks west of Grove Street at MP 15.8

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

CP 46th Street

Dual control crossover (10 MPH), facing point for eastward movements from Track No. 2 (MP 4.51) to Track No. 3 (MP 4.44) Switch #7. This crossover will be under authority of the Rock Island District Transportation Department and will be clamped for straight mainline moves and considered Out of Service. Authority to use this switch must be obtained from the Office of the Director of the Rock Island District.

9.18 ELECTRICALLY LOCKED SWITCHES AND DERAILS

Use of electrically locked switches and derails will be authorized by:

- The Rock Island Terminal Dispatcher between LaSalle Street and the east interlocking limits at Gresham Junction.
- The Rock Island Road Dispatcher between the east interlocking limits at Gresham Junction and End NIRC.

At MED Connection, MP 15.6 - In addition to receiving authority from the Rock Island District Road Dispatcher to open the electrically locked switch, a crew member must contact the Metra Electric South Dispatcher [AAR Channel 61-61 or 312 322-2860] to receive verbal permission before removing the connection track derail and occupying Metra Electric District trackage.

9.18.1 LOCATION OF ELECTRICALLY LOCKED SWITCHES AND DERAILS

MP 2.3	Track No. 2 - MOW Spur	MP 23.5	Track No. 2 - MOW Spur
MP 6.36	Track No. 1 - NS Connection	MP 27.0	Track No. 2 - Ozinga Spur
MP 14.3	Track No. 2 - CRL Connection	MP 29.6	Track No. 1 - MOW Spur
MP 15.6	Track No. 1 - Metra Electric District Connection	MP 38.7	Track No. 2 - CN Connection

13.0 RULES APPLICABLE ONLY IN AUTOMATIC CAB SIGNAL SYSTEM (ACS) TERRITORY


Cab Signal Territory

Track No. 1	Westward - MP 14.5 to MP 39.9
	Eastward - MP 39.9 to MP 14.5
Track No. 2	Westward - MP 14.5 to MP 39.9
	Eastward - MP 39.9 to MP 14.5
Main Track	MP 39.9 to MP 40.2

Operation of Non-Cab Signal Equipped Trains in Cab Signal Territory

Non-cab signal equipped trains operating in cab signal territory will be governed by the following restrictions:


- Must advise train dispatcher or control operator that train is non-cab signal equipped before entering main track.
 - May not operate during the hours of peak commuter train service.
 - Maximum authorized speed 30 MPH.
 - An absolute block must be established in advance of the movement.
- Absolute block will be established verbally by the train dispatcher or control operator by stating, "Absolute block is established in advance of your train on (track) between (point) and (point)." Absolute block limits must be designated by specifying track, where required, and exact points such as mile posts or station names.
- If the absolute block includes the main track beyond a signal displaying Rule 9.1.2 (Restricting), non-cab signal equipped trains may pass signal displaying Rule 9.1.2 (Restricting) within the absolute block at restricted speed without stopping.

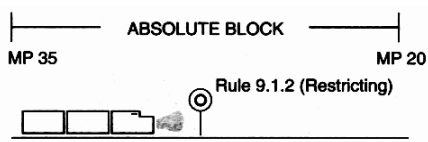

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

Train may pass signal at restricted speed without stopping.

- If the absolute block includes the main track beyond a signal displaying Rule 9.1.2 (Restricting), non-cab signal equipped trains may pass signal displaying Rule 9.1.2 (Restricting) at restricted speed without stopping to leave the main track through a switch that is immediately after the signal.

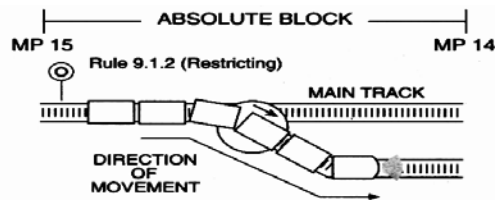

Train may pass signal at restricted speed without stopping.

13.1.4 CAB SIGNALS CUT IN AND OUT

In addition, Engineers must also conduct a Daily Cab Signal Departure Test in the following situations:

- If the 24-hour period for their equipment will expire during their tour of duty.
- If the cab signals are cut back in following a failure.
- or
- After making a cut to operate a reduced consist and the cab signals on the cab car to be used have not been previously tested.

Empty Heritage Corridor equipment movements between Joliet Coach Yard and the UP-Connection Track at CP Richards Street may be made with cab signals cut out governed by the following restrictions:


An absolute block must be established in advance of the movement in one of the following ways:

- A signal indication more favorable than Restricting establishes an absolute block in advance of the movement. Contact with the Train Dispatcher is not required.
- or
- If the signal displays a Stop or Restricting indication the movement must stop and not proceed until the Train Dispatcher verbally establishes an absolute block in advance of the movement and verbally authorizes movement past the signal.
- Movement must be made at restricted speed.

13.2.1 RESTRICTIVE TO MORE FAVORABLE (Change rule to read):

Cab signal indications do not supersede the indication displayed on block and interlocking signals.

When a cab signal changes to a more favorable indication after having passed a Stop or Restricting signal, the train must proceed at restricted speed until the leading wheels reach a point where movement at restricted speed is no longer required, or next governing signal, regardless of aspect displayed on cab signal system.

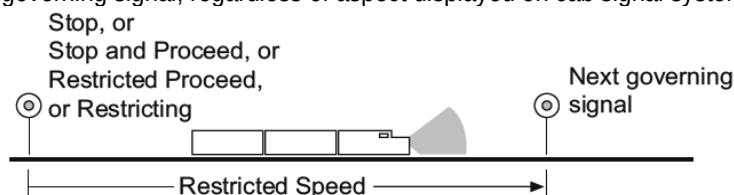

When operating on an indication more favorable than a restricting and the cab signal changes to a more favorable indication after having passed the block or interlocking signal, the train may immediately comply with the indication.

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

13.3.1 CAB SIGNAL AND BLOCK SIGNAL DO NOT AGREE (Change second bullet point to read):

- At control point locations with only an absolute signal(s), when authorized by the train dispatcher to pass the Stop indication, the cab signal may change to a more favorable indication after passing the signal. The train must proceed at restricted speed until it reaches the next governing signal. This is normal due to the track circuitry and would not be considered an improper display of the cab signal.

13.3.3 MOVEMENT WITH AN INOPERATIVE CAB SIGNAL DEVICE Add Following Diagram B:

In addition:

- A rules qualified employee must occupy the control cab with the engineer.
or
- If the conductor has a radio, the provisions of System Special Instruction 1.47D apply.

15.1 TRACK BULLETINS

Crews on trains originating at any outlying point, including 47th/51st Street Yard, Blue Island and Joliet, will contact the train dispatcher approximately 15 minutes prior to leaving to verify the current daily operating bulletin in effect and determine if there are any voided items.

If communication with the train dispatcher is delayed or there is no response, trains will contact the control operator at 16th Street Tower or Blue Island Tower to verify daily operating bulletin/track bulletin information.

15.2 PROTECTION BY TRACK BULLETIN FORM B

Track bulletin Form B may be used on 5 Siding within Blue Island Interlocking.

20.1 CLEARANCE AND WEIGHT RESTRICTIONS

Clearance Restrictions

Chicago Terminal to MP 40.6

- 11 ft. 0 in. wide above 1 ft. 4 in. ATR
- 9 ft. 10 in. wide below 1 ft. 4 in. ATR
- 18 ft. 3 in. ATR east of 16th Street Tower
- 20 ft. 3 in. ATR west of 16th Street Tower

6 axle locomotives must not be coupled to cars exceeding 89 ft. on UP connection Track at U. D. Interlocking. When cars exceeding 89 ft. in length are handled in trains they must be separated from 6 axle locomotive by a buffer car.

Weight Restrictions

Chicago Terminal to MP 40.6

- 286,000 lbs maximum gross weight of car, and minimum car length of 55'.
- 4 axle locomotives exceeding 300,000 lbs. are prohibited.

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

20.3 ROAD CROSSINGS AT GRADE

Listed below are public crossings on the Joliet Sub District. Crossings are listed in station order from east to west and unless noted otherwise, all crossings are equipped with gate and flasher warning devices.

Crossings followed by (W) require trains to sound whistle signal 5.8.2(7). Crossings followed by (Q) indicate a Whistle Quiet Zone in accordance with Rule 5.8.4 (Whistle Quiet Zone).

Street Crossing	City	DOT No.	Mile Post
95th Street (Q)	Chicago	609-011A	10.85
97th Street (W)	Chicago	609-012G	11.12
99th Street (Q)	Chicago	608-302L	11.37
102nd Street (Q)	Chicago	608-303T	11.80
103rd Street (Q)	Chicago	608-304A	11.89
104th Street (Q)	Chicago	608-305G	12.03
105th Street (Q)	Chicago	608-306N	12.16
107th Street (Q)	Chicago	608-307V	12.41
111th Street (Q)	Chicago	608-308C	12.94
112th Street (Q)	Chicago	608-309J	13.15
115th Street (Q)	Chicago	608-310D	13.47
119th Street (W)	Chicago	608-311K	13.99
Vermont Street (W)	Blue Island	608-846J	15.61
Grove Street (W)	Blue Island	608-847R	15.70
139th Street (W)	Robbins	608-939D	17.02
147th Street (W)	Midlothian	608-941E	18.35

Street Crossing	City	DOT No.	Mile Post
Crawford Avenue (W)	Midlothian	608-942L	18.74
Central Avenue (Q)	Oak Forest	608-945G	21.69
167th Street (Q)	Oak Forest	608-946N	21.88
66th Court (Q)	Tinley Park	608-950D	23.30
Oak Park Avenue (Q)	Tinley Park	608-951K	23.52
80th Avenue (Q)	Tinley Park	608-953Y	25.19
191st Street (Q)	Mokena	608-958H	28.01
School House Rd (Q)	Mokena	608-960J	29.22
Mokena Street (Q)	Mokena	608-961R	29.60
Wolf Road (Q)	Mokena	608-962X	29.80
LaPorte Rd (Q)	Mokena	608-963E	30.18
Cedar Road (W)	New Lenox	608-201A	34.02
Vine Street (W)	New Lenox	608-202G	34.45
Old Hickory Road (W)	New Lenox	608-203N	35.33
Gougar Road (W)	New Lenox	608-205C	36.13

20.4 ADDITIONAL SUB DISTRICT INSTRUCTIONS

20.4.1 HOURS OF OPERATION - MANUAL INTERLOCKINGS AND CONTROL POINTS

Location	Hours of Operation
All Locations	Continuous

20.4.2 OPERATION THROUGH TRAIN WASHER AT 47th STREET YARD

The train washer is fully automated with operation controlled by 2 sensors located on the Wash Lead at MP 4.6, approximately 100 feet (first sensor) and 50 feet (second sensor) east of the train washer building.

Trains to be washed must approach the first sensor not exceeding 3 MPH and must determine that the preceding train has cleared the west end of the washer before fouling the first sensor. The first sensor will activate the building doors and a green light will be displayed indicating that the movement can enter the building. As the movement passes the second sensor, the washing cycle will be activated. Washing speed is 2 MPH.

JOLIET SUB DISTRICT SPECIAL INSTRUCTIONS

The following light signals and indications may be displayed, inside the building, during the washing cycle:

- Green - The movement is operating at the proper washing speed of 2 MPH.
- Flashing Yellow - The movement has reached 3 MPH and speed must be reduced.
- Red - The movement has reached 4 MPH and must stop.

The washing cycle will automatically stop when the movement's speed reaches 4 MPH. To restart the washing cycle, the movement must remain stopped and wait for a yellow light to be displayed indicating that the washer has reset. Display of the yellow light indicates that the movement can proceed.

A reverse movement must not be made after entering the train washer unless permission is received from the Mechanical Department.

There is no clearance for an employee to ride on the side of equipment entering or leaving the building.

On days when no trains will be washed, the Mechanical Department will display a sign outside the entrance indicating "No Wash Today". On days when the "No Wash Today" sign is displayed, trains may proceed through the train washer at 5 MPH regardless of light signals displayed when the building doors are seen to be open.

20.5 TOPS STATION NUMBERS

Listed below are TOPS station numbers to be used when preparing Form TTR1. Locations and names indicated in *italics* are not shown as stations in the timetable.

La Salle Street	000	Gresham Junction	099	80th Avenue	251
<i>Signal Bridge A</i>	<i>004</i>	95th Street (<i>Longwood</i>)	109	Hickory Creek	275
<i>Signal Bridge B</i>	<i>006</i>	103rd Street (<i>Washington Hts.</i>)	120	CP Mokena	296
16th Street Tower	011	Purinton	144	New Lenox	340
35 th Street	035	Blue Island	157	CP 35.5	355
CP Pershing	038	Western Ave. Junction	159	EJ&E Crossing	389
CP Wash	042	Robbins	172	CP Miller Street	395
CP 46th Street	045	Midlothian	184	CP Richards Street	399
CP 54th Street	054	Oak Forest	204	Joliet	400
Englewood	067	CP 66th Court	223	UD Tower	401
CP 81st Street	090	Tinley Park	235	End NIRC	406
Gresham	098				

BEVERLY SUB DISTRICT SPECIAL INSTRUCTIONS

BEVERLY SUB DISTRICT
RADIO FREQUENCY 161.340 - AAR CHANNEL #82

Road Dispatcher - Chicago has jurisdiction between east interlocking limits Gresham Junction and Western Ave. Junction

	Mile Posts	STATIONS	Rule 4.3	Type of Operation	Control of Manual Interlockings and Control Points	WWD Miles to Next Station	
WESTWARD ▼	9.9	*Gresham Junction <i>JCT Joliet Sub Dist</i>	BFJMPRTX(2)	Manual Interlocking*	Road Dispatcher	0.5	▲ EASTWARD
	10.4	CP Elizabeth	HX	2 MT - CTC	Road Dispatcher	0.2	
	10.6	Brainerd	DWX			0.7	
	11.3	91st Street	DW			0.4	
	11.7	95th Street	DW			0.6	
	12.3	99th Street	DW			0.5	
	12.8	103rd Street	DW			0.5	
	13.3	107th Street	DW			0.4	
	13.7	111th Street	DPW			0.6	
	14.3	115th Street	DW			0.6	
	14.9	119th Street	DW			0.4	
	15.3	123rd Street	D			0.3	
	15.6	CP 15.6	HX			0.3	
	15.9	Prairie Street	D			0.4	
	16.3	CP Vermont Street	HXY		Control Operator - Blue Island	0.1	
	16.4	Blue Island	ABDFMPRWY	Manual Interlocking		0.2	
	16.6	Western Ave. Junction <i>JCT Joliet Sub District</i>	JMX(2)			0.8 to Interchange	

* - Gresham Junction - Interlocking Limits are part of the Joliet Sub District and end at MP 10.12

* - Beverly Sub District - Limits begin at MP 10.12 and end at Western Avenue Junction MP 16.52.

6.26 MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES

- Positive Train Control (PTC) is in service on the Beverly Subdivision between Gresham Jct. MP 10.12 and Western Ave. Jct. MP 16.52.
- Two main Tracks are in use between Gresham Junction and CP Vermont. Main Tracks are numbered from South to North as Track BV1 and Track BV2.

Between	Track(s)	Direction	Signal System	Rules in Effect
Gresham Junction and CP Vermont	BV1 and BV2	Both	CTC	10.1-10.3.4

BEVERLY SUB DISTRICT SPECIAL INSTRUCTIONS

	PSGR	FRT
6.31 MAXIMUM AUTHORIZED SPEED	30 MPH	20 MPH
6.31.1 PERMANENT SPEED RESTRICTIONS	PSGR	FRT
MP 10.12 to MP 10.13 - Through Curve.	20	20
MP 10.13- Morgan Street Bridge	20	10
MP 15.7 - Over Industry Switch on Track No. 2	20	20
MP 16.1 to MP 16.51 on BV1.	20	10
MP 16.1 to MP 16.52 on BV2	20	10
Other than Main Track	10	10

SPEED THROUGH TURNOUT OF SWITCHES

MP 10.4- Through Crossover at CP Elizabeth.	25	10
MP 15.6 - Through Crossover at CP 15.6	25	20

BEVERLY SUB DISTRICT INTERLOCKINGS AND CONTROL POINTS

Station	Controlled By	Type of Operation	East Limits	West Limits
CP Elizabeth	Road Dispatcher	Control Point	10.38	10.50
CP 15.6	Road Dispatcher	Control Point	15.52	15.59
CP Vermont	Blue Island Tower	Control Point	BV1 - 16.22	BV1 - 16.29
CP Vermont	Blue Island Tower	Control Point	BV2 - 16.22	BV2 - 16.30

1.44 DUTIES OF TRAIN DISPATCHERS

The Rock Island Road Dispatcher has jurisdiction between the east interlocking limits at Gresham Junction and Western Avenue Junction.

1.47D OBSERVE AND CALL SIGNALS

All signals on the Beverly Sub District are either absolute signals or signals governing approach to absolute signals and must be communicated in accordance with System Special Instruction 1.47D.

2.7 MONITORING RADIO TRANSMISSIONS

The following radio channels are in use:

AAR Channel	Location	Frequency
01-01	47th Street Yard - Mechanical Department	161.610
82-82	Gresham Junction and Western Ave. Junction.	161.340
33-33	PTC Help Desk (MTAC) - CCF	160.605

6.4.2 MOVEMENTS WITHIN CONTROL POINTS AND INTERLOCKINGS

At Blue Island - Westward passenger trains or empty equipment movements that will change direction after stopping at Blue Island passenger station may accept a proceed indication displayed on the eastward absolute signal at CP Vermont Street for eastward movement and are not required to receive permission from the control operator to change direction.

To ensure automatic warning devices are operating for their eastward movement, westward passenger trains and empty equipment movements that will change direction west of Grove Street must receive permission from the control operator to change direction.

BEVERLY SUB DISTRICT SPECIAL INSTRUCTIONS

6.32.2 AUTOMATIC WARNING DEVICES

At Blue Island - The automatic warning devices at Vermont Street, MP 16.34, and Grove Street, MP 16.43 can also be controlled manually by the control operator at Blue Island. Control operator must not raise gates which have lowered for an approaching train until the train has stopped clear of the crossing.

8.5 CLEARING MAIN TRACK BEFORE RESTORING SWITCH

Trains moving into the west end of Blue Island Coach Yard at CP Vermont Street must not restore main track switch to Normal position until the trailing wheels of the movement pass the yellow insulated joint located just west of the yard track No. 2 switch.

8.8 SWITCHES EQUIPPED WITH LOCKS, HOOKS OR LATCHES

All switches in Blue Island Coach Yard are equipped with switch locks. When not in use switches must be lined and locked for the lead towards Yard Track No. 6.

9.2.1 VIEW OF SIGNALS

The requirements of System Special Instruction 9.2.1 (View of Signals) regarding passenger stops apply to:

- **Westward Trains At**
 - Blue Island – Both Main Tracks
- **Eastward Trains At**
 - Blue Island – Both Main Tracks

9.13.2 LOCATION OF DUAL CONTROL SWITCHES

CP Elizabeth	All Switches
CP 15.6	All Switches
Blue Island-Western Ave. Junction	All Switches

9.18 ELECTRICALLY LOCKED SWITCHES AND DERAILS

Use of electrically locked switches and derails will be authorized by the Rock Island Road Dispatcher between the east interlocking limits at Gresham Junction and Western Ave. Junction.

9.18.1 LOCATION OF ELECTRICALLY LOCKED SWITCHES AND DERAILS

MP 15.3 Track BV1 – 123rd St. Spur Track
MP 15.9 Track BV1 - Coach Yard Lead

13.0 RULES APPLICABLE ONLY IN AUTOMATIC CAB SIGNAL SYSTEM (ACS) TERRITORY

Cab Signal Test Reporting

Engineers conducting Daily Cab Signal Departure Tests must record the results on the prescribed form.

15.1 TRACK BULLETINS

Crews on trains originating at Blue Island will contact the Road Dispatcher approximately 15 minutes prior to leaving to verify the current Daily Operating Bulletin (DOB) in effect and determine if there are any voided items.

If communication with the Road Dispatcher is delayed or there is no response, contact the control operator at Blue Island to verify the Daily Operating Bulletin and Track Bulletin information.

BEVERLY SUB DISTRICT SPECIAL INSTRUCTIONS

20.1 CLEARANCE AND WEIGHT RESTRICTIONS

Clearance Restrictions

Gresham Junction to Western Ave. Junction

- 11 ft. 0 in. wide above 1 ft. 4 in. ATR
- 9 ft. 10 in. wide below 1 ft. 4 in. ATR
- 23 ft. 3 in. ATR

Excessive dimension loads are prohibited east of 123rd Street.

Weight Restrictions

Gresham Junction to Western Ave. Junction

- 263,000 lbs maximum gross weight of car and minimum car length of 42', and/or any car with the load on any single axle exceeding 65,750 lbs.
- 4 axle locomotives exceeding 300,000 lbs. are prohibited.

20.3 ROAD CROSSINGS AT GRADE

Listed below are public crossings on the Beverly Sub District. Crossings are listed in station order from east to west and unless noted otherwise, all crossings are equipped with gate and flasher warning devices.

Note: The milepost location reflects information provided by the Illinois Commerce Commission.

Crossings followed by (X) are equipped with crossbucks only.

Crossings followed by (W) require trains to sound whistle signal 5.8.2(7). Crossings followed by (Q) indicate a Whistle Quiet Zone in accordance with Rule 5.8.4 (Whistle Quiet Zone).

Street Crossing	City	DOT No.	Mile Post
Aberdeen Street (Q)	Chicago	608-920F	10.27
Racine Avenue (Q)	Chicago	608-918K	10.40
Throop Street (Q)	Chicago	608-917D	10.52
Loomis Street (Q)	Chicago	608-855H	10.65
Laflin Street (Q)	Chicago	608-854B	10.77
94th Street (Q)	Chicago	608-844V	11.63
95th Street (Q)	Chicago	608-843N	11.76
96th Street (Q)	Chicago	608-842G	11.88
99th Street (Q)	Chicago	608-841A	12.26
100th Street (Q)	Chicago	608-840T	12.39
101st Street (Q)	Chicago	608-839Y	12.52
103rd Street (Q)	Chicago	608-838S	12.78
105th Street (Q)	Chicago	608-837K	13.03
107th Street (Q)	Chicago	608-836D	13.28
108th Street (Q)	Chicago	608-835W	13.54

Street Crossing	City	DOT No.	Mile Post
Ashland Avenue (W)	Chicago	608-853U	10.90
Paulina Street (Q)	Chicago	608-852M	11.04
90th Street (Q)	Chicago	608-851F	11.13
91st Street (Q)	Chicago	608-848X	11.26
93rd Street (Q)	Chicago	608-854C	11.45
Prospect Avenue (Q)	Chicago	608-834P	13.69
111th Street (Q)	Chicago	608-833H	13.79
113th Avenue (Q)	Chicago	608-832B	14.06
115th Street (Q)	Chicago	608-831U	14.29
119th Street (Q)	Chicago	608-830M	14.80
120th & Vincennes (W)	Blue Island	608-829T	14.93
123rd Street (W)	Blue Island	608-828L	15.31
Prairie Street (W)	Blue Island	608-849E	15.89
Vermont Street (W)	Blue Island	608-846J	16.34
Grove Street (W)	Blue Island	608-847R	16.43

BEVERLY SUB DISTRICT SPECIAL INSTRUCTIONS

20.4 ADDITIONAL SUB DISTRICT INSTRUCTIONS

20.4.1 HOURS OF OPERATION - MANUAL INTERLOCKINGS AND CONTROL POINTS

Location: Hours of Operation:
All Locations Continuous

20.5 TOPS STATION NUMBERS

Listed below are TOPS station numbers to be used when preparing Form TTR1. Locations and names indicated in *italics* are not shown as stations in the timetable.

Gresham Junction	099
Brainerd	106
91st Street (<i>Beverly Hills</i>)	113
95th Street (<i>Beverly Hills</i>)	117
99th Street (<i>Beverly Hills</i>)	123
103rd Street (<i>Beverly Hills</i>)	128
107th Street (<i>Beverly Hills</i>)	133
111th Street (<i>Morgan Park</i>)	138

115th Street (<i>Morgan Park</i>)	143
119th Street (<i>Blue Island</i>)	148
123rd Street (<i>Blue Island</i>)	152
CP 15.6	156
Prairie Street (<i>Blue Island</i>)	158
Blue Island	164
Western Ave. Junction	159

SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS

SOUTHWEST SUB DISTRICT

RADIO FREQUENCY 160.440 - AAR CHANNEL #22

Metra Southwest Dispatcher - Chicago has jurisdiction between 23rd Street and CP 74th Street.

Norfolk Southern Control Operator - Landers has jurisdiction between CP 74th Street and CP Brown.

	Mile Posts	STATIONS	Rule 4.3	Type of Operation	Control of Manual Interlockings and Control Points	WWD Miles to Next Station		
WESTWARD ▼	1.7	23rd Street <i>Begin NIRC, JCT NS</i>	JM	Manual Interlocking	Amtrak CUS South Train Director	2.3	▲ EASTWARD	
				CTC				
	4.0	CP 518 <i>JCT NS</i>	JMTX(2)	Manual Interlocking	NS Chicago Terminal Dispatcher	2.2		
	6.2	CP 59th Street	HY	2 MT – CTC	Metra Southwest Dispatcher	1.5		
	7.7	CP 74th Street <i>JCT NS</i>	HJ			1.3		
	9.0	Belt Junction <i>JCT BRC</i>	JMX(2)	Manual Interlocking	BRC Dispatcher Clearing Yard	1.0		
				2 MT – CTC				
	10.0	Forest Hill <i>CSXT Crossing</i>	MX	Manual Interlocking	CSXT Dispatcher Calumet City, IL	0.3		
				CTC				
	10.3	Landers <i>NS Crossing</i>	BFMPRY	Manual Interlocking	NS Control Operator - Landers	1.2		
	11.5	Wrightwood	DW	CTC		0.7		
	12.2	Ashburn <i>CSXT Crossing</i>	DMWX(2)	Manual Interlocking		2.5		
	14.7	Oak Lawn	DW	2MT – CTC		1.7		
	16.4	CP Ridge <i>IHB Crossing, JCT IHB</i>	JMX(2)	Manual Interlocking	IHB Dispatcher Calumet City, IL	0.2		
	16.6	Chicago Ridge	DW	2 MT – CTC	NS Control Operator - Landers	1.2		
	17.8	Worth	DW			0.8		
	18.6	Palos Heights	DW			0.5		
	19.1	CP Palos	HX(2)			0.7		
	19.8	Palos Park	DW			3.2		
	23.0	143rd Street	DW			0.1		
	23.1	CP 143rd Street	H			2.1		
	25.2	153rd Street	ABDFPRW			CTC		3.5
	28.7	CP 179th Street	BDFHPRWY	0.4				
	29.1	CP Will Cook	HY	5.9				

SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS

SOUTHWEST SUB DISTRICT Continued

	Mile Posts	STATIONS	Rule 4.3	Type of Operation	Control of Manual Interlockings and Control Points	WWD Miles to Next Station	
	35.0	CP Brisbane	HS		NS Control Operator - Landers	0.4	
W W D ▼	35.4	Laraway Road	DWS	CTC		0.7	▲ E W D
	36.1	CP Lenox	HS			4.1	
	40.2	CP Brown	H			0.1	
	40.3	Manhattan	DW			0.4	
	40.7	End of Track	BFPQRY	Other Than Main Track			

The distance between MP 23 and MP 24 is approximately 0.75 mile. Signs reading "Short Mile" have been placed at MP 23.0 for westward movements and at MP 24.0 for eastward movements.

Siding Length: CP Brisbane-CP Lenox Controlled Siding – 5,395 ft.

6.26 MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES

Positive Train Control (PTC) is in service on the Metra Runner between MP 1.70 and MP 3.69 and on all main tracks beginning at MP 4.10 and ending at 40.18.

- Two main tracks are in use between CP 518 and Forest Hill and between Ashburn and CP 143rd Street. Main Tracks are numbered from South to North as Track No. 1 and Track No. 2.
- Main track ends: CP Brown - At "END C.T.C." sign.

Between	Track(s)	Direction	Signal System	Rules in Effect
23rd Street and CP 518	Main	Both	CTC	10.1-10.3.4
CP 518 and Forest Hill	1 and 2	Both	CTC	10.1-10.3.4
Forest Hill and Ashburn	Main	Both	CTC	10.1-10.3.4
Ashburn and CP 143rd Street	1 and 2	Both	CTC	10.1-10.3.4
CP 143rd Street and CP Brown	Main	Both	CTC	10.1-10.3.4

6.31 MAXIMUM AUTHORIZED SPEED

23rd ST. (MP 1.7) TO CP 74th ST. (MP 7.6)	PSGR	FRT
CP 74th ST. (MP 7.6) TO MP 12.0	60 MPH	25 MPH
MP 12.0 TO CP BROWN (MP 40.2)	50	40
	79	40

6.31.1 PERMANENT SPEED RESTRICTIONS

MP 3.3 - Through Turnout of Switch from Main Track to Canalport Lead.	10	10
MP 3.3 to MP 3.5	40	25
40th Street to 74th Street - Locomotive consists of 5 or more coupled 6-axle units		20
40th Street to 74th Street - Freight trains containing loaded cars with a gross weight of 100 tons or more in blocks of 5 cars or more and freight trains containing a loaded double stack car		20
MP 4.1 to MP 5.0	45	25
MP 4.5 - Through Turnout of Switch from Track No. 2 to NS Yard	10	10
MP 5.0 - Through Turnout of Switch from Track No. 2 to MOW Spur Track	10	10
MP 6.0 to MP 6.2	55	25
CP 59th Street - Through Turnout of Switch from Track No. 1 to NS Yard	10	10
MP 7.1 to MP 7.2 - Track No. 2	50	25
CP 74th Street - Through Turnouts of All Switches.	25	25
MP 7.8 to 76th Street (End NIRC) - On NS Connecting Track to BRC	25	25
MP 7.8 to MP 8.2	25	20

SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS

Belt Junction - Within Interlocking Limits	30	25
Forest Hill - Within Interlocking Limits	30	30
Forest Hill - Through Turnout of Switch	25	25
Ashburn - Within Interlocking Limits	40	30
Ashburn - Through Turnouts of East Crossover.	25	25
Ashburn - Through Turnouts of West Crossover.	40	30
CP Ridge - Within Interlocking Limits	60	25
CP Ridge - Through Turnouts of Crossovers	40	30
CP Ridge - Through Turnout of IHB Connection Switch	10	10
CP Palos - Through Turnouts of All Switches.	40	30
CP 143rd Street - Through Turnout of Switch.	40	30
MP 23.4 to MP 24.9.	60.	40
MP 27.6 to MP 28.0.	60.	40
CP 179th Street - Through Turnout of Switch	10	10
CP Will Cook - Through Turnout of Switch	10	10
MP 30.6 to MP 31.0	60.	40
MP 32.0 to MP 32.3	60.	40
MP 33.3 to MP 33.7	50.	40
MP 33.7 to MP 34.3	60.	40
CP Brisbane - Through Turnout of Switch	25	25
MP 35.8 to MP 36.1	60.	40
CP Lenox - Through Turnout of Switch	25	25
MP 39.8 to MP 40.1	50.	40
Other than Main Track	10	10
Except: CP Brisbane to CP Lenox - On Controlled Siding	20	20
MP 40.2 to West End of Manhattan Station Platform at MP 40.3.	20	20

AMTRAK PASSENGER TRAINS OPERATE AT PASSENGER TRAIN SPEED BETWEEN 23rd Street AND CP 74th Street

SOUTHWEST SUB DISTRICT INTERLOCKINGS AND CONTROL POINTS

Mile posts listed are Metra Mile posts, refer to the Chicago Operating Rules Association (CORA) guide or foreign line rule books for mileposts of intersecting railroads.

Station	Controlled By	Type of Operation	East Limits	West Limits
23 rd St (Amtrak)	CUS South Train Director	Control Point	0.0	1.70
CP 518 (NS)	NS Chicago Terminal Dispatcher – Atlanta, GA	Manual Interlocking	3.69	4.10
CP 59 th Street	Metra Southwest Dispatcher	Control Point	6.13	6.18
CP 74 th Street	Metra Southwest Dispatcher	Control Point	7.59	7.81
Belt Junction (BRC)	BRC Dispatcher – Clearing Yard	Manual Interlocking	TRK 1 - 8.79	9.17
Belt Junction (BRC)	BRC Dispatcher – Clearing Yard	Manual Interlocking	TRK 2 - 8.79	9.22
Forest Hill (CSXT)	CSXT Dispatcher-Calumet City, IL	Manual Interlocking	10.00	10.15
Landers (NS)	NS Control Operator-Landers	Manual Interlocking	10.28	10.42
Ashburn (CSXT)	NS Control Operator-Landers	Manual Interlocking	11.97	12.18
CP Ridge (IHB)	NS Control Operator-Landers	Control Point	16.25	16.51
CP Palos	NS Control Operator-Landers	Control Point	19.05	19.23
CP 143 rd Street	NS Control Operator-Landers	Control Point	23.07	23.15
CP 179 th Street	NS Control Operator-Landers	Control Point	28.68	28.77
CP Will Cook	NS Control Operator-Landers	Control Point	29.02	29.16
CP Brisbane	NS Control Operator-Landers	Control Point	34.97	35.04
CP Lenox	NS Control Operator-Landers	Control Point	36.00	36.07
CP Brown	NS Control Operator-Landers	Control Point	40.18	40.18

SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS

ENHANCED FOCUS CROSSOVER LOCATIONS

MP 7.7 CP 74th Street - Westward Movements Only MP 19.1 CP Palos

ENHANCED FOCUS CURVE AND/OR BRIDGE LOCATIONS

MP 7.9 – 8.2	74 th Street	Main Track	Both Directions	25 MPH
MP 33.3-33.7	Route 30	All Tracks	WWD Direction	50 MPH

1.39 ACCURACY OF SPEED INDICATOR

Speed Test Sections

Measured test sections, subdivided into 1/4-mile segments and identified by Speed Test Section Signs, are located:

1/4 MILE SPEED TABLE

Location	Track	Direction	Miles Per Hour	Seconds Per 1/4 Mile
MP 6.5 to MP 7.5	Track No. 2	WWD	45	20
MP 15.0 to MP 16.0	Track No. 2	WWD	50	18
MP 18.5 to MP 19.5	Track No. 1	EWD	55	17
MP 26.5 to MP 27.5	Main Track	EWD	60	15
			65	14
			70	13
			75	12

1.44 DUTIES OF TRAIN DISPATCHERS

The Southwest Dispatcher has jurisdiction between 23rd Street and the west limits of CP 74th Street.

1.45 DUTIES OF CONTROL OPERATORS AND OPERATORS

The Norfolk Southern Control Operator - Landers has jurisdiction and train dispatcher authority between the west limits of CP 74th Street and CP Brown.

SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS

2.7 MONITORING RADIO TRANSMISSIONS

The following radio channels are in use:

AAR Channel	Location	Frequency
22-22	23rd Street to End of Track	161.440
33-33	Positive Train Control (PTC) Help Desk (MTAC) - CCF	160.605

6.32.2 AUTOMATIC WARNING DEVICES

At CP 179th Street - Eastward trains before starting movement from station platform on yard lead must activate crossing warning devices at 179th Street by pressing button located in box on pole at east end of platform. These warning devices will time out 1 minute after button is depressed unless movement has started toward the crossing. Box must be locked after use.

9.1 SIGNAL ASPECTS AND INDICATIONS

At 23rd Street - The eastward absolute signal governing movements from the Metra Main Track to the Norfolk Southern will display aspects in accordance with Amtrak Signal Aspects and Indications shown in the CORA Operating Guide.

At CP 518 - Absolute signals governing movements will display aspects in accordance with Conrail Block and Interlocking Signals shown in the Norfolk Southern Section of the CORA Operating Guide.

Maintenance of Way equipment will be advanced through CP 518 by Track Authority issued by NS Chicago Terminal Dispatcher.

At Belt Junction - Absolute signals governing movements on Metra tracks will display aspects in accordance with Metra Block and Interlocking Signals for movements routed to Metra tracks. These signals will also display aspects in accordance with BRC Speed Signals, shown in the Belt Railway of Chicago section of the CORA Operating Guide, for movements routed to BRC tracks.

9.2.1 VIEW OF SIGNALS

The requirements of System Special Instruction 9.2.1 (View of Signals) regarding passenger stops apply to:

- **Westward Trains At**
 - 143rd Street Both Main Tracks
 - CP 179th Street Main Track
- **Eastward Trains At**
 - Ashburn Both Main Tracks
 - Chicago Ridge Both Main Tracks

9.8 NEXT GOVERNING SIGNAL

At CP 518 - When Conrail Rule N286 (Medium Approach) aspect is displayed for movement routed to the Metra Main Track and after movement clears CP 518, trains will proceed prepared to stop at next signal not exceeding 40 MPH.

9.13.2 LOCATION OF DUAL CONTROL SWITCHES

CP 59th Street	All Switches	CP Palos	All Switches
CP 74th Street	All Switches	CP 143rd Street	Switch at End of 2 Main Tracks
Belt Junction	All Switches	CP 179th Street	Switch at East End of Yard
Forest Hill	All Switches	CP Will Cook	Switch at West End of Yard
Ashburn	All Switches	CP Brisbane	Siding Switch
CP Ridge	All Switches	CP Lenox	Siding Switch

SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS

9.15 TRACK PERMITS

Track permits will be used to authorize track cars or employees to occupy the NS Connecting Track to BRC between CP 74th Street and 76th Street (End NIRC).

Between CP 74th Street and 76th Street on NS Connecting Track to BRC - Before a track permit is issued authorizing track cars or employees to occupy the NS Connecting Track between CP 74th Street and 76th Street (End NIRC), the Southwest Dispatcher must be informed by the BRC Train Dispatcher that blocking devices have been applied at 80th Street to prevent movements into the limits.

9.18 ELECTRICALLY LOCKED SWITCHES AND DERAILS

Use of electrically locked switches and derails will be authorized by:

- The Southwest Dispatcher between 23rd Street and the west limits of CP 74th Street.
- The Norfolk Southern Control Operator - Landers between west limits of CP 74th Street and CP Brown.

9.18.1 LOCATION OF ELECTRICALLY LOCKED SWITCHES AND DERAILS

MP 3.3 Main Track - UP Yard Track No. 2
MP 4.5 Track No. 2 - NS Yard Lead
MP 5.0 Track No. 2 - Maintenance of Way Spur
MP 9.23 Track No. 1 - Low Line Lead - Spur
MP 11.7 Main Track - East End of Maintenance of Way Siding
MP 11.9 Main Track - West End of Maintenance of Way Siding
MP 14.8 Track No. 1 - Beatty Lumber Spur
MP 16.2 Track No. 2 - Maintenance of Way Spur
MP 16.57 Track No. 1 - Foreman's Spur
MP 22.2 Track No. 2 - Maintenance of Way Spur
MP 35.5 Main Track - East End of Maintenance of Way Siding
MP 35.84 Main Track - West End of Maintenance of Way Siding
MP 39.9 Main Track - East End of Manhattan Siding
MP 40.07 Main Track - West End of Manhattan Siding
MP 40.13 Main Track - Aeropress Spur

10.1 AUTHORITY TO ENTER CTC LIMITS

Reversing Traffic

A push button is mounted in a box on a post at the east end of the station platform at 153rd Street. Westward movements passing westward signal 1-249 may secure a proceed indication on eastward signal 1-250 by unlocking push button box and depressing button for 2 seconds and then releasing. Box must be locked after operating the push button.

Contact Norfolk Southern Control Operator - Landers prior to depressing push button.
--

10.3 TRACK AND TIME

Between 23rd Street and CP 518 - Before granting track and time between 23rd Street and CP 518, the Southwest Dispatcher must be informed by the Amtrak CUS South Train Director that blocking devices have been applied at 23rd Street and by the Norfolk Southern Chicago-West Train Dispatcher that blocking devices have been applied at CP 518 to prevent movements into the limits.

15.1 Daily Operating Bulletins

Metra's Southwest Service Daily Operating Bulletins are issued by the Metra Southwest Dispatcher.

Daily Operating Bulletin limits on Metra Southwest Sub District Sub are between MP 1.72 and MP 40.18

SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS

15.2 PROTECTION BY TRACK BULLETIN FORM B

On NS Connecting Track to BRC - Track Bulletin Form B may be used between CP 74th Street and 76th Street (End NIRC) on the NS Connecting Track to BRC.

20.1 CLEARANCE AND WEIGHT RESTRICTIONS

Clearance Restrictions

23rd Street to MP 40.7

- 11 ft. 0 in. wide above 1 ft. 4 in. ATR
- 9 ft. 10 in. wide below 1 ft. 4 in. ATR
- 20 ft. 7 in. ATR east of CP 179th Street
- 19 ft. 2 in. ATR west of CP 179th Street

Weight Restrictions

23rd Street to MP 40.7

263,000 lbs. maximum gross weight of car and minimum car length of 42', and/or any car with the load on any single axle exceeding 65,750 lbs.

- 6 axle locomotives are prohibited on the following tracks:
 - MP 14.8 Beatty Lumber Spur - Oak Lawn
 - MP 16.7 Foreman's Spur - Chicago Ridge
 - MP 30.0 to MP 40.7 All Tracks

20.3 ROAD CROSSINGS AT GRADE

Listed below are public crossings on the Southwest Sub District. Crossings are listed in station order from east to west and unless noted otherwise, all crossings are equipped with gate and flasher warning devices.

Note: The milepost locations reflect information provided from the Illinois Commerce Commission.

Crossings followed by (W) require trains to sound whistle signal 5.8.2(7). Crossings followed by (Q) indicate a Whistle Quiet Zone in accordance with Rule 5.8.4 (Whistle Quiet Zone).

Street Crossing	City	DOT No.	Mile Post
83rd Place (W)	Chicago	478-750H	12.25
Lawndale Avenue (W)	Chicago	478-751P	12.35
87th & Pulaski (W)	Chicago	478-752W	12.87
Duffy Avenue (W)	Hometown	478-753D	13.41
Kilbourn Street (Q)	Hometown	478-754K	13.77
Cicero Avenue (Q)	Oak Lawn	478-755S	14.20
95th Street (Q)	Oak Lawn	478-756Y	14.60
52nd Avenue (Q)	Oak Lawn	478-757F	14.76
Cook Street (Q)	Oak Lawn	478-758M	14.84

Street Crossing	City	DOT No.	Mile Post
108th Avenue (Q)	Orland Park	478-780A	26.36
167th Street (Q)	Orland Park	478-781G	26.83
Wolf Road (Q)	Orland Park	478-782N	27.87
179th Street (Q)	Orland Park	478-783V	28.67
Maple Street (Marley Road) (W)	Marley	478-785J	30.41
Regan Road (W)	New Lenox	478-786R	31.12
Francis Road (W)	New Lenox	478-787X	31.68
Wood Street (Q)	New Lenox	478-789L	32.39
Joliet Highway (Q)	New Lenox	478-791M	33.99

SOUTHWEST SUB DISTRICT SPECIAL INSTRUCTIONS

54th Avenue (Q)	Oak Lawn	478-759U	15.05
Central Avenue (Q)	Oak Lawn	478-760N	15.33
Ridgeland Avenue (W)	Chgo. Ridge	478-761V	16.57
107th Street (W)	Chgo. Ridge	478-763J	17.23
86th Avenue (Q)	Palos Park	478-770U	20.66
135th Street (Q)	Orland Park	478-772H	21.86
143rd Street (Q)	Orland Park	478-774W	23.19
West (100th) Ave. (Q)	Orland Park	478-776K	23.48
153rd Street (Q)	Orland Park	478-778Y	24.97
159th Street (Q)	Orland Park	478-779F	25.76

Illinois Highway (Q)	New Lenox	478-792U	34.50
Laraway Road (Q)	Will County	478-794H	35.51
Delaney Road (Q)	Will County	478-898P	36.53
Cedar Road (Rte. 4) (Q)	Will County	478-899W	36.83
Baker Road (Q)	Will County	478-901V	37.59
Smith Road (W)	Will County	478-903J	38.77
Eastern Ave. (W)	Will County	478-904R	39.19
North St. (Rte. 6) (W)	Manhattan	478-905X	39.80
State St. (US 52) (W)	Manhattan	478-906E	39.90

20.4 ADDITIONAL SUB DISTRICT INSTRUCTIONS

20.4.1 HOURS OF OPERATION - MANUAL INTERLOCKINGS AND CONTROL POINTS

Location	Hours of Operation
All Locations	Continuous

20.5 TOPS STATION NUMBERS

Listed below are TOPS station numbers to be used when preparing Form TTR1. Locations indicated in *italics* are not shown as stations in the timetable.

<i>Chicago - Amtrak</i>	000
<i>Roosevelt Road - Amtrak</i>	008
<i>Lumber Street - Amtrak</i>	010
<i>South Branch Bridge</i>	014
<i>21st Street - Amtrak</i>	016
23rd Street	020
CP 518	043
CP 59th Street	064
CP 74th Street	082
Belt Junction	092
Forest Hill	098

Landers	103
Wrightwood	108
Ashburn	122
Oak Lawn	148
CP Ridge	164
Chicago Ridge	166
Worth	178
Palos Heights	189
CP Palos	191
Palos Park	199
143rd Street	232

153rd Street	252
<i>159th Street</i>	259
CP 179th Street	289
<i>Marley</i>	305
<i>New Lenox</i>	335
<i>Steele</i>	338
CP Brisbane	348
Laraway Road	349
Manhattan	404
End of Track	421

Employees are warned that the University Park, South Chicago and Blue Island Sub Districts are operated by high voltage transmission and contact wires.

Employees are forbidden from touching, or in any manner putting themselves in personal contact with these high voltage wires.

If necessary, in the discharge of duty, to pass in proximity of these high voltage wires, adequate precaution must be exercised against the danger of personal contact with such wire.

Employees should be aware that poles, wires, or other appurtenances used in this operation may become displaced, misaligned, broken, etc., from actions of the elements, equipment failure, failure of physical plant, etc., and when not in normal position or condition, may be a source of danger. Adequate precaution must be exercised by themselves and on behalf of the traveling public.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

UNIVERSITY PARK SUB DISTRICT RADIO FREQUENCY 161.025 - AAR CHANNEL #61

	Mile Posts	STATIONS	Rule 4.3	Type of Operation		Control of Manual Interlockings and Control Points	SWD Miles to Next Station	
S O U T H P A R K D I S T R I C T ▼	0.00	Randolph Street	ABDFMPQR W YX (2)	Other Than MT & Manual Interlocking STR 0.66 NWD		Terminal Dispatcher	0.80	▲ N O R T H D I S P A T C H E R
	0.80	Van Buren Street	ADPQWY	3 MT - CTC			0.51	
	1.31	CP 11th Place STR 1.22 - 1.34	FQYZX (2)	Control Point			0.12	
	1.43	Museum Campus/11th Street	FQYX	2 MT ABS SWD 1 2 ▼ ▼ ▲ ▲ 3 4	2 MT ABS NWD ▲ ▲ 3 4	North Dispatcher	0.79	
	2.22	18th Street	DEY				0.46	
	2.68	McCormick Place	DPW				0.52	
	3.20	27th Street	DP				2.70	
	5.90	47th Street	DP				0.30	
	6.20	51st Street	MX(2)				Manual Interlocking*	
	6.54	53rd Street	DPW	2 MT ABS SWD 1 2 ▼ ▼ ▲ ▲ 3 4	2 MT ABS NWD ▲ ▲ 3 4		0.45	
	6.99	57th Street	DPW				0.44	
	7.43	59th Street	ADPQ				0.49	
	7.92	63rd Street	D				0.16	
	8.08	65th Street	MX(2)	Manual Interlocking*			0.25	
	8.33	67th Street	DFQR	4 MT - CTC			0.24	
	8.57	69th Street JCT South Chicago Sub Dist.	JMX(2)	Manual Interlocking*			0.75	
	9.32	75th Street	D	4 MT - CTC			0.67	
	9.99	79th Street	DP				0.39	
	10.38	83rd Street	DP				0.48	
	10.86	87th Street	DP				0.51	
	11.37	91st Street	DP				0.67	
	12.04	95th Street	DP				1.02	

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

UNIVERSITY PARK SUB DISTRICT Continued

	Mile Posts	STATIONS	Rule 4.3	Type of Operation	Control of Manual Interlockings and Control Points	SWD Miles to Next Station	
S O U T H C H I C A G O ▲ ▼	13.06	103rd Street	DP	4 MT - CTC	North Dispatcher	0.48	▲ N O R T H D I S P A T C H E R ▼
	13.54	107th Street	DP			0.41	
	13.95	111th Street	DP			0.54	
	14.49	Kensington <i>JCT Blue Island Sub Dist./NICTD</i>	DEFJMPQR WY X(2)	Manual Interlocking STR 14.21 - 15.22	South Dispatcher	2.84	
	17.33	Riverdale	DP	2 MT - CTC		0.85	
	18.18	Ivanhoe	DPW			0.80	
	18.98	147th Street	DP			0.91	
	19.89	CP 19.89	H			0.11	
	20.00	Harvey	DPWX(2)			2.27	
	22.27	Hazel Crest	DP			0.55	
	22.82	Calumet	DPW			0.69	
	23.51	Homewood	DPQW			0.39	
	23.90	Homewood Interlocking	MX(2)	Manual Interlocking STR 23.56 - 24.18		1.03	
	24.93	Flossmoor	DPQW	2 MT - CTC		1.63	
	26.56	Olympia Fields	DP			1.06	
	27.62	211th Street	DPW			0.62	
	28.24	Matteson	DP			0.32	
	28.56	Richton Yard	FMQRYX(2)	Manual Interlocking		0.77	
	29.33	Richton Park	DPW	CTC		2.17	
	31.50	University Park	DFMPQWY	Manual Interlocking & Other Than MT			

* - 51st Street Interlocking Limits: Main 1 and 2 - STR 5.98 - 6.33, Main 3 - STR 6.22 - 6.33, Main 4 - STR 6.28 - 6.33

* - 65th Street Interlocking Limits: Main 1 and 4 - STR 8.05 - 8.37, Main 2 and 3 - STR 8.05 - 8.17

* - 69th Street Interlocking Limits: Main 1 and 4 - STR 8.47 - 8.74, Main 2 and 3 - STR 8.37 - 8.74

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

6.26 MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES

- Positive Train Control (PTC) is in service on the University Park Subdivision between Van Buren MP 0.90 and University Park MP 31.11
- Three main tracks are in use between Randolph Street and 11th Place. Main Tracks are numbered from West to East as Main 1, Main 2 and Main 3.
- Four main tracks are in use between 11th Place and Kensington. Main Tracks are numbered from West to East as Main 1, Main 2 and Main 3 and Main 4.
- Two main tracks are in use between Kensington and Richton Yard. Main Tracks are numbered from West to East as Main 1 and Main 2.
- Main tracks end: Randolph Street – At South interlocking limits STR 0.68.
University Park – At “END C.T.C.” sign.

Between	Track(s)	Direction	Signal System	Rules in Effect
Randolph Street and 11th Place:	1	Both	CTC	10.1-10.3.4
	2	Both	CTC	10.1-10.3.4
	3	Both	CTC	10.1-10.3.4
CP11th Place and STR 8.05	1 and 2	South	ABS	9.14
CP11th Place and STR 8.05	3 and 4	North	ABS	9.14
STR 8.05 and STR 14.21	1, 2, 3 and 4	Both	CTC	10.1-10.3.4
STR 15.22 and Richton Yard	1 and 2	Both	CTC	10.1-10.3.4
Richton Yard and University Park	Main	Both	CTC	10.1-10.3.4

	PSGR	FRT
6.31 MAXIMUM AUTHORIZED SPEED	.65 MPH	40 MPH
6.31.1 PERMANENT SPEED RESTRICTIONS		
Movement Against the Current of Traffic	59	40
On Diverging Routes and Through Turnout of Switches - Except as Shown Below . . .	15	10
NICTD Station Tracks - Between End of Track and Track No. 3 Switch at Monroe St. .	10	10
Randolph Street to North End / CP 11 th Place.	20	10
Except: Randolph Street - Within Interlocking Limits	15	10
Within CP 11th Place.	15	10
Through Double Slip Switch	10	10
STR 1.31 to STR 2.31 - Main 3 and Main 4	50	40
STR 1.80 to STR 2.31 - Main 1 and Main 2.	40	40
STR 2.31 to STR 2.54 - Reverse Curves	25	20
STR 8.05 to STR 8.74	45	20
Kensington - STR 14.21 to STR 14.78.	35	20
Kensington - Through Turnout of Switch From Main 3 to Main 4	25	20
Kensington - On NICTD Ladder Track.	10	10
Kensington - Through Turnout of Switch from Main 2 to NICTD Ladder Track	10	10
STR 16.92 to STR 16.99 – Main 2	50	30
STR 23.43 to STR 23.48 – Main 1.	55	40
Richton Park - Over Hand Throw Switch at STR 29.10 to STR 29.13.	15	10
Other than Main Track	10	10
Through Turnout of all Switches Not Otherwise Specified	10	10
Except: Richton Yard on Yard Main 1 Between Richton Yard and Richton Park		
From 7:30 AM until 4:00 PM	20	10

ENHANCED FOCUS CROSSOVER LOCATIONS

MP 6.20 51st Street	MP 23.90 HW
MP 8.23 64th Street	MP 28.40 Richton Yard
MP 15.21 Kensington	

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

SOUTH CHICAGO SUB DISTRICT RADIO FREQUENCY 161.025 - AAR CHANNEL #61

RADIO FREQUENCY 161.925 - 74.4R CH-ANNEE 1601							
	Mile Posts	STATIONS	Rule 4.3	Type of Operation	Control of Manual Interlockings and Control Points	SWD Miles to Next Station	
S O U T H C H I C A G O ▼	8.57	69th Street <i>JCT University Park Sub Dist.</i>	JMX(2)	Manual Interlocking STR 8.37 - 8.47	North Dispatcher	0.52	▲ N O R T H C H I C A G O D
	9.09	Stony Island	DPW	Double Track ABS		0.53	
	9.62	Bryn Mawr	DPW			0.61	
	10.23	South Shore	DPW			0.36	
	10.59	74th Street Crossovers	X(2)			0.22	
	10.81	Windsor Park	DPW			0.54	
	11.35	79th Street	DP			0.50	
	11.85	83rd Street	DPWX			0.54	
	12.39	87th Street	DPW			0.74	
				Yard Limits MP 12.82 - STR 13.04			
13.13	South Chicago	DFPQVWXZ	Main Tracks End - STR 13.04 – 13.13 Other than Main Trk.	North Dispatcher			

6.26 MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES

- Double Track is in use between STR 8.47 and end of Main Tracks at STR 13.04. Main Tracks are designated from West to East as Southward (SWD) Track and Northward (NWD) Track. The Southward Track is signaled for southward movement and the Northward Track is signaled for northward movement.
- South Chicago Verbal Control Point governing northward movements is located at MP 12.82.
- Yard Limits are in effect between MP 12.82 and end of Main Tracks at STR 13.04.
- Main tracks end: At South Chicago - STR 13.04.

Between	Track(s)	Direction	Signal System	Rules in Effect
STR 8.47 and MP 12.82:	SWD	South	ABS	6.24, 9.14
	NWD	North	ABS	6.24, 9.14
MP 12.82 and STR 13.04:	SWD	South	ABS	6.13, 9.14
	NWD	North	ABS	6.13, 9.14

ELECTRIC

	PSGR	FRT
6.31 MAXIMUM AUTHORIZED SPEED	30 MPH	20 MPH

6.31.1 PERMANENT SPEED RESTRICTIONS

On Diverging Routes and Through Turnout of All Switches	15	10
69 th Street to Stony Island Avenue - Through Curves	15	10
South Shore - Through Curve	15	10
79 th Street - Through Curve	15	10
83rd Place to STR SC 12.17 - Through Curve	20	20
90 th Street to STR 13.04.	20	20
All movements through crossover at 92 nd Street.	15	10
Other than Main Track	10	10

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

BLUE ISLAND SUB DISTRICT RADIO FREQUENCY 161.025 - AAR CHANNEL #61

	Mile Posts	STATIONS	Rule 4.3	Type of Operation	Control of Manual Interlockings and Control Points	SWD Miles to Next Station	
S O U T H W A R D ▼	14.49	Kensington <i>JCT University Park Sub Dist</i>	DEFJMPQRWY X(2)	Manual Interlocking STR 14.21 - 15.22	South Dispatcher	1.11	▲ N O R T H W A R D
	15.60	State Street	DP	CBS		0.52	
	16.12	Stewart Ridge	DP			0.58	
	16.70	West Pullman	DPZ	2 MT - CBS SWD ▲ NWD ▼ MP 16.57 - 16.93		0.48	
	17.18	Racine Avenue	DP	CBS		0.60	
	17.78	Ashland Avenue	DP			0.62	
	18.40	Burr Oak	DP			0.55	
				Yard Limits MP 18.70 - 18.79			
	18.95	Blue Island <i>Jct. Rock Island District</i>	DFJPPWY	MT Ends - MP 18.79-18.95 Other than MT	South Dispatcher		

6.26 MAIN TRACKS, SIGNAL SYSTEMS, CURRENT OF TRAFFIC AND GOVERNING RULES

- Two Main Tracks are in use between MP 16.57 (north spring switch) and MP 16.93 (south spring switch) at West Pullman. Main Tracks are designated from West to East as Southward (SWD) Track and Northward (NWD) Track.
- Blue Island Verbal Control Point governing northward movements is located at MP 18.61.
- Yard Limits are in effect between MP 18.61 and MP 18.79.
- Main track ends: At Blue Island - MP 18.79.

Between	Track(s)	Direction	Signal System	Rules in Effect
Kensington* and MP 16.57 at West Pullman	Main	Both	CBS	9.14.2
MP 16.57 and MP 16.93 at West Pullman:	SWD	South	CBS	9.14.2
	NWD	North	CBS	9.14.2
MP 16.93 at West Pullman and MP 18.61	Main	Both	CBS	9.14.2
MP 18.61 and MP 18.70	Main	Both	CBS	6.13, 9.14.2
MP 18.70 and End of Main Track at MP 18.79	Main	Both	None	6.13

* Track west of and adjacent to University Park Sub Dist Main Track No. 1, between connection with Main Track No. 1 at STR 14.72 and STR 15.22 called the Blue Island Connection Track and is part of the University Sub District Main Track within Kensington interlocking limits. Track is signaled for movement in both directions.

6.31 MAXIMUM AUTHORIZED SPEED PSGR FRT
KENSINGTON TO BLUE ISLAND (VIA BLUE ISLAND LEAD) 30 MPH 20 MPH

6.31.1 PERMANENT SPEED RESTRICTIONS

On Diverging Routes and Through Turnout of All Switches 15 10
STR 15.22 to STR 15.47 - Through Curve 15 10
Other than Main Track 10 10

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

1.3.2 GENERAL ORDERS and 1.3.3 CIRCULARS, INSTRUCTIONS, AND NOTICES

Employees working at outlying points must be familiar with all information posted on the Bulletin Board at Randolph Street.

1.20 ALERT TO TRAIN MOVEMENT

Employees are prohibited from riding on the stirrup of a moving electric passenger car and must not get on or off such cars while in motion, except in case of emergency.

1.39 ACCURACY OF SPEED INDICATOR

Speed Test Sections

Measured test sections, identified by white signs with black lettering reading "BEGIN MEASURED 1/4 MILE" and "END MEASURED 1/4 MILE", are located:

				1/4 MILE SPEED TABLE	
Sub District	Location	Track	Direction	Miles Per Hour	Seconds Per 1/4 Mile
University Park	Mile 4.25 to Mile 4.50	All Main Tracks	Both	30	30
University Park	Mile 7.60 to Mile 7.85	All Main Tracks	Both	45	20
University Park	Mile 25.50 to Mile 25.75	Both Main Tracks	Both	50	18
University Park	Mile 29.75 to Mile 30.00	Main Track	North	55	17
South Chicago	Mile 10.37 to Mile 10.62	Both Main Tracks	North	60	15
Blue Island	Mile 17.95 to Mile 18.20	Main Track	Both	65	14

1.44 DUTIES OF TRAIN DISPATCHERS

- The Metra Electric Terminal Dispatcher controls Randolph Street Interlocking and has jurisdiction and train dispatcher authority on the University Park Sub District between Randolph Street and CP 11th Place on Track Nos. 1, 2, 3 and 4.
- The Metra Electric North Dispatcher controls 51st Street, 65th Street and 69th Street Interlockings and has jurisdiction and train dispatcher authority on the University Park Sub District between the south limits of CP11th Place and the north limits of Kensington Interlocking on Tracks Nos. 1, 2, 3 and 4. The North Dispatcher has jurisdiction and train dispatcher authority over the South Chicago Sub District.
- The Metra Electric South Dispatcher has jurisdiction and train dispatcher authority over the Blue Island Sub District and the University Park Sub District between the north limits of Kensington Interlocking and the end of the University Park Sub District at MP 31.4.

1.46 DUTIES OF YARDMASTERS

When on duty, the General Yardmaster at Randolph Street Station will instruct train crews on the disposition of their equipment and will coordinate staging of trains in Randolph Street Station with the Metra Electric Terminal Dispatcher.

1.47D OBSERVE AND CALL SIGNALS

The provisions of System Special Instruction 1.47D do not apply north of STR 0.66 on the University Park Sub District.

On equipment trains, a Train Crew Member must occupy the control compartment of the train with the Engineer. These instructions do not apply to equipment trains operating between Randolph Street and 18th Street MU Yard.

2.7 MONITORING RADIO TRANSMISSIONS

The following radio channels are in use:

AAR Channel	Location	Frequency
61-61	Randolph Street to University Park 69th Street to South Chicago Kensington to Blue Island	161.025
33-33	Positive Train Control (PTC) Help Desk (MTAC)-CCF	160.605
74-74	18th Street Facility - Mechanical Department	161.220
01-01	KYD Facility - Mechanical Department	161.610

2.17 RADIO TESTING

The radio test will be made between the north and south control cabs.

4.4 EMPLOYEE TRAIN SCHEDULE

Scheduled meeting points will be indicated in the Employee Train Schedule by the schedule number(s) of the train(s) to be met. The schedule numbers will be indicated by smaller figures enclosed in a box along with the station time in the Employee Train Schedule.

The Metra Electric South Dispatcher will advance train(s) by track permit if the scheduled meet cannot be fulfilled.

The following stations are specified as transfer stations:

- 57th Street
- 59th Street
- 67th Street - For southward University Park Sub District trains and southward South Chicago Sub District loop trains.
- Kensington - For Blue Island Sub District trains that originate and terminate at 111th Street.

4.4.1 SCHEDULE TIME

Where two trains have the same scheduled time at a station, it will be regarded as a transfer connection. If connecting train is late, conductor will contact the train dispatcher and be governed by instructions received.

The following trains may leave the stations indicated in advance of scheduled leaving time shown in the Employee Train Schedule:

- Northward NICTD trains may leave any station.
- Northward Metra trains may leave Museum Campus/11th Street and Van Buren Street.
- Empty Equipment Trains may leave any station in advance of scheduled leaving time shown EXCEPT SCHEDULED MEETS AT WEST PULLMAN.
- Odd numbered trains 711 through 721 and 731 through 739 may leave any station south of Kensington.

5.2.3 COMMUNICATING SIGNALS

A lighted door closed indicator light and signal 5.2.3(a) [oo] is authority to start the train from normal station stops. If the door closed indicator light fails:

- The conductor will sound signal 5.2.3 (a) [oo].
- Following a pause, the conductor will again sound signal 5.2.3(a) [oo].
- At subsequent stops the conductor will sound signal 5.2.3 (a) [oo].

If a station stop is made which results in car doors not being spotted on the platform:

- The engineer will sound signal 5.2.3(g) [—] on the overrun buzzer.
- The conductor must consider this an emergency signal.
- The conductor must not open any doors until it has been determined which doors can be opened safely.

Engineers will sound signal 5.2.3(d) [ooo] on the overrun buzzer to answer signal 5.2.3(d) [ooo] from a trainman and signal 5.2.3(e) [oooo] to request the conductor to verbally communicate with them.

5.8.1 RINGING ENGINE BELL

Engine bell must be rung on all main tracks between Roosevelt Road and 18th Street, Monday through Friday between the hours of 6:00 AM and 6:00 PM.

5.9.1 DIMMING HEADLIGHT Item No. 4 Is Changed:

When approaching and passing the head end of a train at night. However on the University Park Sub District, the Headlight may also be dimmed during the day but the ditch lights must be displayed.

5.9.5 DISPLAY OF DITCH LIGHTS

Ditch lights will be displayed as follows:

- Operate in the auto flash mode on the University Park Sub District.
- Operate in the continuous flash mode on the South Chicago Sub District.
- Operate in the continuous flash mode on the Blue Island Sub District.

5.10 MARKERS

At Randolph Street - Markers will be turned off on arrival and white lights will be displayed on the south end of the train, unless the equipment is scheduled to move to the 18th Street MU Yard.

At Outlying Yards - Markers will be turned off when equipment is tied up clear of the main track.

5.10.2 ALTERNATIVE MARKERS

If both marker lights on the rear of an MU train fail, the trailing headlight illuminated on dim will be used as a marker.

5.11 ENGINE IDENTIFYING NUMBER

Illuminated train numbers, instead of engine numbers, will be displayed on the front and rear of scheduled electric passenger trains. Non-scheduled electric trains will display illuminated blank number boards.

5.11.1 TRAIN IDENTIFICATION LIGHTS

Train Identification Lights will be displayed:

- Monday through Saturday:
 - Green Lights - All 100 and 700 series trains.
 - Yellow Lights - All 200, 500 and 600 series trains.
 - White Lights - All 300 and 400 series trains.
 - White Lights - Empty equipment trains and non-scheduled electric passenger trains.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

- Sundays and Holidays:
 - Green Lights - All 800 series trains.
 - White Lights - All 8300 series trains.
 - White Lights - Empty equipment trains and non-scheduled electric passenger trains.
- Equipment trains moving between Randolph Street and 18th Street MU Yard will not display Train Identification Lights.

NOTE: On 1200/1300 series equipment, the circuit breaker for the Train Identification Lights and the Number Lights located in the B-2 electrical locker must be turned off to extinguish the Train Identification Lights.

5.13C BLUE SIGNAL READILY VISIBLE TO ENGINEER

At Randolph Street - Engineers finding a blue light on the rotary stem of the brake valve on the south end of the train will not make up the cab or raise pantograph.

5.14 SIGNS PROTECTING EQUIPMENT

D.C. Catenary work groups will use red signs or flags with the words "Electric Trains Must Not Pass This Point" stenciled in white. Electric trains encountering an unattended sign or flag must stop, contact the Train Dispatcher and be governed by instructions received.

At Kensington – When necessary to display these signs to govern northward movement of electric trains on CN Track No. 1 at STR 14.37 or STR 14.31, they will be placed to the west side of CN Track No. 1. When displayed in this manner, the sign will not apply to northward electric trains operating on Metra tracks at STR 14.37 or STR 14.31.

5.17.2 BANNER LOCATION

On the South Chicago Sub District banners will be displayed to the left of the track as viewed from approaching train or on-track equipment moving with the current of traffic and to the right of the track as viewed from approaching train or on-track equipment moving against the current of traffic.

6.2 INITIATING MOVEMENT

Before initiating movement on a main track, the conductor and engineer must obtain a Daily Operating Bulletin listing all track bulletins in effect as follows:

- Metra trains originating at Randolph Street, 57th Street, South Chicago, 111th Street, Kensington, Blue Island, Richton Yard, University Park or any other location where a loop train turns.
- NICTD trains at their initial terminal.

6.3 MAIN TRACK AUTHORIZATION

In addition to obtaining authority, trains not indicated in the Employee Train Schedule must not occupy the main track, outside yard limits until verbal permission is received from the Metra Electric Train Dispatcher.

The Metra Electric Train Dispatcher must be advised of the movement of on-track equipment which cannot readily be removed from the track.

6.4.1 PERMISSION FOR REVERSE MOVEMENTS

Obtain permission from the train dispatcher or control operator before making a reverse movement. If necessary to move beyond the block occupied:

- Movement must be authorized by track permit in ABS or CBS territory.
- Movement must be authorized by a proceed indication from a controlled signal or verbal authority from the control operator in CTC territory.

A promoted crew member must be on the leading end of all reverse movements.

6.13 YARD LIMITS

Movements against the current of traffic in yard limits will be verbally authorized by the Metra Electric Train Dispatcher. Track cars must be authorized by track permit in yard limits.

6.23 EMERGENCY STOP OR SEVERE SLACK ACTION

Due to the proximity of CN Main Tracks 1 and 2 to the University Park Sub District main tracks, between MP 2.4 and MP 31.4, in the event a train operating on the CN main tracks has an emergency application of the brakes, the train will transmit an emergency message on the Metra Road radio channel (61-61) in the following manner:

"Emergency, Emergency, Emergency. CN 5620 North is in emergency moving north on Main 2 at MP 25."

Metra and NICTD trains receiving this transmission will be governed by the provisions of Rule 6.23 at the location specified.

In the event a Metra or NICTD train is operating next to the CN and experiences an emergency situation, in particular if the train must be evacuated, the train will transmit an emergency message on the CN road channel (72-72) in the following manner:

"Emergency, Emergency, Emergency. Metra Electric (or NICTD) Train No. 736 is stopped at MP 21 on Metra Track No. 2."

6.25 MOVEMENT AGAINST THE CURRENT OF TRAFFIC

South Chicago Loop Trains - A proceed indication from a controlled signal at 65th Street or verbal authority from the Metra Electric North Train Dispatcher will authorize scheduled and non-scheduled northward South Chicago loop trains to move against the current of traffic on Track No. 1 or Track No. 2 from 65th Street to 57th Street without a track permit. The Metra Electric North Train Dispatcher will establish absolute block for these movements between 51st Street and 65th Street.

Southward South Chicago loop trains originating at 57th Street on Track No. 3 or Track No. 4 will operate south to the first absolute signal without a track permit. The Metra Electric North Train Dispatcher will establish an absolute block for these movements.

South Chicago loop trains operating against the current of traffic without a track permit must make the following announcement over the radio:

"Metra Electric Train No. 350 is northward on Track No. 1 at 64th Street."

6.30 RECEIVING OR DISCHARGING PASSENGERS

- A. Car stop signs displaying numbers corresponding to the number of cars in the train are installed on station platforms. Trains making passenger stops must stop at the appropriate car stop sign to insure doors are properly positioned on the platform.
- B. If an unusual station stop is made where any of the loading doors are not spotted on the platform, the Metra Electric Train Dispatcher must be notified before leaving the station.
- C. If the entire train goes by a platform where a stop is required, the Metra Electric Train Dispatcher must be immediately notified, and the crew will be governed by instructions received.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

6.32 ROAD CROSSINGS

At CP11th Place - All movements on the Dog Pocket must stop before occupying the busway crossing. The crossing must not be occupied until visible warning has been provided by a crew member or an employee on the ground at the crossing.

6.32.2 AUTOMATIC WARNING DEVICES

The following road crossings are equipped with gate indicators which will display aspects in accordance with System Special Instructions Rules 9.1.29 and 9.1.30:

Sub District	Crossing	Track	Governing Trains Moving
Blue Island	Michigan Avenue	Main Track	SWD
Blue Island	State Street	Main Track	NWD
Blue Island	Halsted Street	NWD MT	NWD

Trains operating against the current of traffic must approach all crossings prepared to stop until it is known that the automatic warning devices are operating and the crossing gates are fully lowered.

At 83rd Street - Southward trains operating on the Southward main track are cautioned that the automatic warning devices at 83rd Street will time out after 1 1/2 minutes. Southward trains operating on the Southward track that are delayed over 1 minute when making a station stop at 83rd Street must approach 83rd Street crossing prepared to stop and not occupy the crossing until the automatic warning devices are operating and the crossing gates are in the fully lowered position.

At South Chicago - Northward trains before starting movement from station must activate automatic warning devices at 92nd Street by pressing proper push button in release box on the station platform not more than 1 minute before departure, except when cars are to be left at the platform. The button labeled "EAST" is for trains departing from the track on the east side of the platform and the button labeled "WEST" is for trains departing from the track on the west side of the platform.

At West Pullman - Southward trains are cautioned that the automatic warning devices at Peoria Street will time out after 90 seconds. If the warning devices have timed out, Southward trains must move to the "X-RESTART" sign and wait until the automatic warning devices are operating and the crossing gates are fully lowered before occupying the crossing.

Northward trains must not activate the automatic warning devices at Halsted Street until a proceed indication is received. When a proceed indication is received, Northward trains must move to the "X-RESTART" sign and wait until the automatic warning devices are operating and the crossing gates are fully lowered before occupying the crossing.

7.6 SECURING CARS OR ENGINES

Conductors are responsible to:

- Ensure that the hand/park brake is set on the north and south cars of trains tying up at University Park and on the south car of trains tying up at other outlying points.
- Ensure that the hand/park brake is set on the south car of trains terminating at Randolph Street.
- Check the position of drum switches when couplings or setouts are made at outlying points.

8.9 MOVEMENT OVER SPRING SWITCHES

Location and normal position of spring switches:

Sub District	Location	Normal Position
South Chicago	92nd Street - South switch of crossover	Lined for Northward MT
Blue Island	West Pullman - North switch at end of 2 main tracks	Lined for Southward MT
Blue Island	West Pullman - South switch at end of 2 main tracks	Lined for Northward MT

8.9.4 DURING SNOW OR ICE STORMS

Snow melters are installed on the following spring switches:

Sub District	Location	Type	Control Location
South Chicago	92nd Street South switch of crossover	Electric	Box on STR 13.04
Blue Island	West Pullman - North switch at end of 2 main tracks	Electric	Box on pole near switch stand
Blue Island	West Pullman - South switch at end of 2 main tracks	Electric	Box on pole near switch stand

8.10 SWITCH POINT INDICATOR

Switch point indicators are installed on signal AA-155 governing southward movements and signal AA-198 governing northward movements at West Pullman. If these signals display a red aspect and the switch point indicator displays a lunar aspect, switch test is not required. If these signals display a red aspect and the switch point indicator is dark, switch test is required.

8.12 HAND-OPERATED CROSSOVER SWITCHES

The normal position of the north switch of crossover at 92nd Street - South Chicago Sub District is lined for crossover movement. Unless otherwise instructed by the Metra Electric North Dispatcher, southward trains finding this switch in other than normal position must contact the Metra Electric North Dispatcher.

Location of Hand-Operated Crossovers at 74th Street Crossovers and North of 83rd Street Station – South Chicago Sub District

Location	Mile Post
74th Street Crossovers - North Crossover	10.52
74th Street Crossovers - South Crossover	10.66
Crossover North of 83rd Street Station	11.71 – 11.74

9.1 SIGNAL ASPECTS AND INDICATIONS

The provisions of System Special Instruction 9.1 do not apply north of 18th Street.

At Randolph Street - Station track occupancy indicators will display aspects in accordance with System Special Instructions Rules 9.1.22, 9.1.23 and 9.1.24.

At Richton Yard - Route indicators will display aspects in accordance with System Special Instructions Rules 9.1.27 and 9.1.28.

9.2.1 VIEW OF SIGNALS

The requirement of System Special Instruction 9.2.1 (View of Signals) regarding passenger stops apply to:

- **Southward Trains At**
 - Randolph Street All Tracks
 - 63rd Street All Main Tracks
 - 67th Street Main Tracks No. 2 and No.3
 - Kensington Both Main Tracks
 - Homewood Both Main Tracks
 - Matteson Both Main Tracks
- **Northward Trains At**
 - 53rd Street All Main Tracks
 - 67th Street Main Tracks No.2 and No. 3
 - Kensington Both Main Track
 - University Park Both Tracks

9.9 TRAIN DELAYED WITHIN A BLOCK

The provisions of System Special Instruction 9.9 do not apply north of 18th Street.

9.12.4 ABS TERRITORY

South Chicago Sub District - When a Stop indication is displayed by the absolute signal on the Northward main track, at MP 8.81 (south of the tunnel), a crew member must contact the Metra Electric North Dispatcher and obtain permission to pass the Stop indication.

When a Stop indication is displayed by the Southward absolute signals at MP 13.0 (North of 91st Street), a crew member may depress proper push button located in box adjacent to absolute signal governing movement on the Southward main track. If signal fails to display a proceed indication after 4 minutes, crew member must contact the Metra Electric North Dispatcher and obtain permission to pass the Stop indication.

9.12.5 CONTROLLED BLOCK SYSTEM

Blue Island Sub District - When a Stop indication is displayed on the following absolute signals, a crew member must contact the Metra Electric South Dispatcher and obtain permission to pass the Stop indication:

- Southward entrance signal to Blue Island Sub District at STR 15.22.
- Entrance to Single Track at north and south ends of West Pullman.
- Northward signal at MP 18.70.

9.13.2 LOCATION OF DUAL CONTROL SWITCHES

CP 11 th Place	All Power Operated Switches
65th Street	All Switches
69th Street	All Switches
Kensington	South Crossover Between Track No. 1 and Track No. 2, South Crossover Between Track No. 1 and the Blue Island Lead and Switch from Blue Island Lead to KYD Yard.
HW	All Switches
Richton Yard	All Power Operated Switches
University Park	All Power Operated Switches

9.14 MOVEMENT WITH THE CURRENT OF TRAFFIC

South Chicago Sub District - Upon arrival at South Chicago, all trains and track cars must report their arrival time to the Metra Electric North Dispatcher. Reports must be made in a manner that will avoid delay to trains waiting for authority to depart.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

Trains must contact the Metra Electric North Dispatcher for authority to leave South Chicago. Authority may be obtained by company telephone.

Trains operating with the current of traffic will be authorized by form RC99081. Crews must record the authorization on form RC99081 indicating the Train Number, Time Authorized and Initials of the train dispatcher granting authorization. The Date Authorized will be written in the Time Authorized space. The conductor and engineer must each have a copy of the form in their possession upon departure. The form must be retained until the end of tour of duty. In the event a form is not available, the Train Dispatcher must be advised and the authorization will be issued to both the conductor and the engineer and copied on the back of each of their Daily Operating Bulletins.

Trains operating against the current of traffic will be authorized by track permit.

South Chicago Verbal Control Point - Verbal Control Point governing northward movements is located at MP 12.82. Form RC99081 or track permit is authority for northward movements to proceed.

9.14.2 CONTROLLED BLOCK SYSTEM

Blue Island Sub District – Authority to occupy the main track outside yard limits will be granted to:

- Southward trains indicated in the Employee Train Schedule by signal indication from Kensington.
- Northward trains indicated in the Employee Train Schedule by the Metra Electric South Dispatcher using form RC 99081 from Blue Island.
- Trains not indicated in the Employee Train Schedule by track permit.
- On-track equipment by track permit.

The Metra Electric South Dispatcher must verify that opposing scheduled or authorized movements have arrived or are protected before granting authority.

Trains scheduled or instructed by track permit to meet opposing trains at West Pullman must not enter Single Track at the north or south ends of West Pullman until the indicated train(s) has arrived. The Metra Electric South Dispatcher will advance train(s) by track permit if the scheduled meet cannot be fulfilled.

Upon arrival at Blue Island, all trains and on-track equipment must report their arrival time to Metra Electric South Dispatcher. Reports must be made in a manner that will avoid delay to trains waiting for authority to depart.

Trains not authorized by track permit must contact the Metra Electric South Dispatcher for authority to leave Blue Island. Authority may be obtained by company telephone. Crews must record the authorization on form RC 99081 indicating the Train Number, Time Authorized and Initials of the train dispatcher granting authorization. The Date Authorized will be written in the Time Authorized space. The conductor and engineer must each have a copy of the form in their possession upon departure. The form must be retained until the end of tour of duty. In the event a form is not available, the Metra Electric South Dispatcher must be advised, and the authorization will be issued to both the conductor and the engineer and copied on the back of each of their Daily Operating Bulletins.

Blue Island Verbal Control Point - Verbal Control Point governing northward movements is located at MP 18.61. Form RC99081 or track permit is authority for northward movements to proceed.

9.15 TRACK PERMITS

Unless otherwise specified, track permits will be used to authorize:

- Movement of trains against the current of traffic.
- Movement of trains not indicated in the Employee Train Schedule on the Blue Island Sub District.
- Meets between opposing trains at West Pullman.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

- Trains scheduled to meet opposing trains at West Pullman, to leave West Pullman if the scheduled meet cannot be fulfilled.
- Track cars or employees to occupy the main track or tracks outside CTC or interlocking limits.

9.18 ELECTRICALLY LOCKED SWITCHES AND DERAILS

Use of electrically locked switches and derails will be authorized by:

- The Metra Electric South Dispatcher on the University Park Sub District.
- The Rock Island District Road Dispatcher for the Rock Island District Connection Switch at Blue Island Sub District, MP 18.91. The Rock Island Road Dispatcher will coordinate with the Metra Electric South Dispatcher before authorizing use.
- The electric lock switch located at the South End of KYD Yard on the University Park Sub-District at Mile Post 16.08 is equipped with an Engineering Switch Lock. The Metra Electric South Dispatcher will coordinate with the Signal Department before authorizing use.

9.18.1 LOCATION OF ELECTRICALLY LOCKED SWITCHES AND DERAILS

Sub District	Location	Mile Post
University Park	Track No. 1 - South End of KYD Yard	16.08
University Park	Track No. 1 and Track No. 2 - Both Crossovers at Harvey	20.15
Blue Island	Rock Island District Connection Switch	18.91

10.1 AUTHORITY TO ENTER CTC LIMITS

Authority to enter CTC limits between Randolph Street and CP 11th Place and 65th Street and Kensington, by display of a proceed indication on a controlled signal, will be as follows:

- A proceed indication displayed on the absolute signals governing southward movement on Track Nos. 1, 2 or 3 at STR 0.66 is the authority to enter CTC limits on Tracks No. 1, 2 or 3. Signals are controlled by Metra Electric Terminal Dispatcher.
- A proceed indication displayed on the absolute signals governing northward movement on Track Nos. 1, 2, 3, or 4 at the south end of CP 11th Place is authority to enter CTC limits on Tracks 1, 2 or 3 at STR 1.22. Signals are controlled by Metra Electric Terminal Dispatcher.
- A proceed indication displayed on the absolute signals governing southward movement on Track Nos. 1, 2, 3 or 4 on STR 8.05 is authority to enter CTC limits on Track Nos. 1, 2, 3 or 4. Signals are controlled by the Metra Electric North Dispatcher.
- A proceed indication displayed on the absolute signals governing northward movement on Track Nos. 1 or 2 on STR 14.37 is authority to enter CTC limits on Track Nos. 1, 2, 3 or 4 at STR 14.21. Signals are controlled by the Metra Electric South Dispatcher.
- A proceed indication displayed on the absolute signals governing southward movement on Track Nos. 1 or 2 on STR 14.94 is authority to enter CTC limits on Track Nos. 1 or 2 at STR 15.22. Signals are controlled by the Metra Electric South Dispatcher.

Blue Island Loop Trains - Blue Island loop trains are authorized to originate at 111th Street and operate south to the first absolute signal. The Metra Electric South Dispatcher will establish an absolute block for these movements.

10.3 TRACK AND TIME

Track and Time will be issued by:

- Metra Electric Terminal Dispatcher between Randolph Street and CP 11th Place
- Metra Electric North Dispatcher between 65th Street and Kensington
- Metra Electric South Dispatcher between Kensington and University Park

15.1 TRACK BULLETINS

- The conductor and engineer must have a daily operating bulletin listing all track bulletins in effect and copies of all track bulletins listed. Before leaving their initial station on each trip, they must determine if there are any voided items that may affect their trip by contacting the appropriate train dispatcher.
- The Metra Electric Dispatcher will notify trains enroute of any subsequent voided items which may affect their trip.
- Other employees whose work requires them to foul the track(s) must have a Daily Operating Bulletin listing all track bulletins in effect and copies of all track bulletins listed before fouling track(s).
- When the D.C. contact wire is de-energized, the time and limits will be indicated in the D.C Department section of the Daily Operating Bulletin.
During the time stated in D.C bulletin, and before the D.C. contact wire has been de-energized, electric trains may enter and move through the limits indicated as de-energized when:
 - Permission has been obtained from the D.C. Department employee in charge of the limits.
 - Permission has been obtained from the train dispatcher or control operator to pass signal displaying Stop indication governing entrance to the limits.
 - Permission has been obtained from the employee in charge of out of service limits, if the track is also out of service.

20.1 CLEARANCE AND WEIGHT RESTRICTIONS

Clearance Restrictions

Maximum permissible height of cars and equipment:

- 16 ft. 0 in. ATR north of MP 14.0
- 16 ft. 6 in. ATR south of MP 14.0
- 10 ft. 6 in. wide above 1 ft. 4 in. ATR
- 9 ft. 10 in. wide below 1 ft. 4 in. ATR

Before entering Metra Electric District trackage, a crew member must inform the Metra Electric South Dispatcher and be governed by instructions received regarding:

- The engine and car numbers of locomotives and non-electric passenger cars in the consist.
- Non-passenger equipment in the consist, after checking the height stenciled on each car to determining if there are any excess height cars.

Operation of the following Metra equipment is prohibited:

- Locomotives 401- 427
- Locomotives 73 - 93
- Coaches 7400 -7497
- Cab control cars 790 - 815
- Cab control cars 8401 - 8478
- Cab control cars 8501 - 8608

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

Weight Restrictions

- 263,000 lbs. maximum gross weight of car and minimum car length of 42', and/or any car with the load on any single axle exceeding 65,750 lbs.
- 4 axle locomotives exceeding 300,000 lbs. are prohibited.
- 6 axle locomotives are prohibited.

20.3 ROAD CROSSINGS AT GRADE

Listed below are public crossings on the South Chicago and Blue Island Sub Districts. Crossings are listed in station order from north to south and unless noted otherwise, all crossings are equipped with gate and flasher warning devices. All crossings on the South Chicago Sub District are in the City of Chicago.

Crossings followed by (W) require trains to sound whistle signal 5.8.2(7). Crossings followed by (Q) indicate a Whistle Quiet Zone in accordance with Rule 5.8.4 (Whistle Quiet Zone).

SOUTH CHICAGO SUB DISTRICT

Street Crossing	DOT No.	Mile Post
70th Street (Q)	289-529W	8.78
Dorchester Avenue (Q)	289-531X	8.88
71st Street (Q)	289-533L	8.94
Dante Avenue (Q)	289-534T	8.97
Stony Island Avenue (Q)	289-536G	9.15
Cornell Avenue (Q)	289-537N	9.22
East End Avenue (Q)	289-538V	9.28
Ridgeland Avenue (Q)	289-539C	9.34
Cregier Avenue (Q)	289-540W	9.40
Bennett Avenue (Q)	289-541D	9.49
Euclid Avenue (Q)	289-542K	9.56
Jeffery Boulevard (Q)	289-543S	9.65
Chappel Avenue (Q)	289-544Y	9.72
Clyde Avenue (Q)	289-545F	9.78
Merrill Avenue (Q)	289-546M	9.84
Paxton Avenue (Q)	289-547U	9.91
Crandon Avenue (Q)	289-548B	9.99
Oglesby Avenue (Q)	289-549H	10.08
Yates Avenue (Q)	289-550C	10.17

Street Crossing	DOT No.	Mile Post
72nd Street (Q)	289-551J	10.29
73rd Street (Q)	289-552R	10.44
74th Street (Q)	289-553X	10.59
75th Street (Q)	289-554E	10.73
76th Street (Q)	289-557A	10.90
77th Street (Q)	289-558G	11.06
78th Street (Q)	289-559N	11.22
79th Street (Q)	289-560H	11.37
80th Street (Q)	289-561P	11.51
80th Place (Q)	289-562W	11.57
81st Street (Q)	289-563D	11.63
82nd Street (Q)	289-564K	11.76
83rd Street (Q)	289-565S	11.89
83rd Place (Q)	289-566Y	11.97
87th Street (Q)	289-567F	12.43
90th Street (Q)	289-568M	12.81
91st Street (Q)	289-569U	12.93
92nd Street (Q)	289-570N	13.08

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

BLUE ISLAND SUB DISTRICT

Street Crossing	City	DOT No.	Mile Post
Michigan Avenue (Q)	Chicago	289-598E	15.51
State Street (Q)	Chicago	289-599L	15.64
Perry Avenue (Q)	Chicago	289-600D	15.77
Wentworth Avenue (Q)	Chicago	289-601K	15.90
Yale Avenue (Q)	Chicago	289-602S	15.97
Princeton Avenue (Q)	Chicago	289-603Y	16.02
Harvard Avenue (Q)	Chicago	289-604F	16.05
Stewart Avenue (Q)	Chicago	289-605M	16.15
Eggleston Avenue (Q)	Chicago	289-606U	16.21
Normal Avenue (Q)	Chicago	289-607B	16.27
Parnell Avenue (Q)	Chicago	289-608H	16.33
Wallace Avenue (Q)	Chicago	289-609P	16.40
Lowe Avenue (Q)	Chicago	289-610J	16.46
Union Avenue (W)	Chicago	289-611R	16.51

Street Crossing	City	DOT No.	Mile Post
Emerald Ave. (W)	Chicago	289-612X	16.60
Halsted Street (Q)	Chicago	289-613E	16.65
Peoria Street (Q)	Chicago	289-614L	16.77
Ashland Avenue (W)	Calumet Pk.	289-615T	17.80
Wood Street (Q)	Calumet Pk.	289-617G	18.17
126th Street (Q)	Calumet Pk.	289-618N	18.18
Honore Street (Q)	Calumet Pk.	289-619V	18.26
Lincoln/127th Street (Q)	Calumet Pk.	289-620P	18.35
Winchester Ave. (W)	Blue Island	289-621W	18.43
Division & Oaks Sts. (W)	Blue Island	289-622D	18.53
Walnut Street (W)	Blue Island	289-623K	18.60
Union Street (Q)	Blue Island	289-624S	18.69
Hoyne Street (Q)	Blue Island	289-625Y	18.70

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

20.4 ADDITIONAL SUB DISTRICT INSTRUCTIONS

20.4.1 HOURS OF OPERATION - MANUAL INTERLOCKINGS, CONTROL POINTS, AND GENERAL YARDMASTER

Location	Hours of Operation
General Yardmaster - Randolph Street Station	3:00 AM to 7:00 PM Daily except Sunday and Holidays
All Other Locations	Continuous

20.4.2 1500 VOLT D.C. ELECTRICAL INSTRUCTIONS

ALL ELECTRICAL PROBLEMS MUST BE REPORTED TO THE POWER CONTROL DESK REGARDLESS OF TRAIN DISPATCHER JURISDICTION.
--

- A. All catenary system wires and related overhead equipment must be considered energized at all times. Employees must:

- Not depend on covering of wire for their safety.
- Not work on or near overhead wires or equipment unless qualified or under the direction of a qualified employee.
- Keep clear of all pantographs and 1500-volt equipment when pantograph is up.

Lower pantograph on car involved when necessary to touch or work on any 1500-volt equipment.

- Not work on or near battery storage boxes with open flame, lights or torches due to possibility of explosion of built up gases.
- Use extreme caution when a train is stopped under emergency conditions to avoid any wires which may be down.

- B. All trains operating north of Jackson Boulevard must be operated in LOW RATE only.

Not more than 8 cars may be handled in any train in road service, unless otherwise instructed. When authorized to operate more than 8 cars, all movements must be made in LOW RATE, unless otherwise instructed.

Movements within yards must be operated in LOW RATE only.

- C. In the event of a D.C. catenary power failure which results in trains being stopped in the same D.C. catenary section:

- Pantographs will not be lowered unless otherwise instructed.
- Engineer of each train stopped in the same D.C. catenary section will immediately place train in LOW RATE until train is spaced far enough behind preceding train to operate on a Clear signal.

- D. When raising pantographs - Engineers must hold pantograph switch in down position for at least 15 seconds to allow air to build up in pantograph air cylinder to provide a cushion when pantographs are raised.

- E. Employees finding pantographs lowered on cars:

- Between South Water Street and CP11th Place must not raise them and must notify electrician.
- At outlying locations must not raise them until the reason for their being lowered has been determined.

All trains tying up at outlying points will leave pantographs up unless otherwise instructed.

- F. All Power Section Breaks (Air Gaps) are identified at each end by reflectorized white signs with black letters, installed in the catenary system, reading "ENTER AIR GAP" and "EXIT AIR GAP". A train must not stop where a pantograph will bridge the two sections of contact wire between these signs.

Equipment must not stop where a pantograph will bridge the two contact wires of a Wood Stick.

To avoid stopping in an Air Gap, northward trains leaving Museum Campus/11th Street will not enter Track No. 3 until the entire train will clear CP11th Place grade crossing.

To avoid damage to a Wood Stick, southward 6 car trains entering the yard lead at CP11th Place will not stop to let employees off until the south door is south of STR 1.44.

Trains tying up at Richton Yard must clear Air Gaps and Wood Sticks. To clear the Air Gap on Yard Track No. 1, train must pull down and be spotted not less than 2 car length from STR 28.93. The crew must ensure that the train is spotted correctly.

20.4.3 LOAD LIGHTS

Randolph Street Station is equipped with a Load Light System to inform the Information Desk Clerk, the General Yardmaster, the Metra Electric Terminal Dispatcher and train crew members the status of trains prior to departure.

Load Lights will only be used in conjunction with regularly scheduled passenger trains and equipment. Where the following instructions make reference to the General Yardmaster, such reference will apply to the Metra Electric Terminal Dispatcher when the General Yardmaster is not present or not on duty.

Load Lights are located along the station platforms at Randolph Street Station, at the Information Desk, in the General Yardmaster's Office, and on the track display panel for the Metra Electric Terminal Dispatcher. The panel in the General Yardmaster's Office can activate and cancel all Load Lights.

Buttons to activate the Load Lights are mounted on various columns located along the south end of the platforms. These buttons are identified as DOOR (top button) and TRACK (bottom button).

When the Train Is Ready to Load - A trainman will push the DOOR button. After the DOOR button is pushed:

- Platform lights will display a red light which will indicate that the train is loading and must not be moved.
- Gate light will display a green light for the specific track indicating that the train is ready to load. The Information Desk Clerk will then announce the train.
- General Yardmaster's panel will display a red light for the specific track, informing the General Yardmaster that the train is loading.
- The Metra Electric Terminal Dispatcher's track display panel will display a red light on the specific track, informing the Dispatcher that the train is loading.

40 Seconds Before Scheduled Leaving Time - A trainman will push the TRACK button. After the TRACK button is pushed:

- Platform lights will go dark until the Information Desk Clerk's acknowledgment is received.
- Gate light will change to red informing the Information Desk Clerk that the train is prepared to leave.
- General Yardmaster's panel light, for the specific track, will change to yellow indicating that the train is prepared to leave and the Information Desk Clerk has not acknowledged.
- The Metra Electric Terminal Dispatcher's track panel light, for the specific track, will change to flashing green informing the Dispatcher to ensure signals are cleared releasing the train.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

When the Information Desk Clerk Observes the Gate Light Change to Red – The clerk will acknowledge by pressing the corresponding green button on the panel. After the green button is pushed:

- Platform lights will display a green light indicating that the train may leave upon receipt of proper signal.
- Gate light will go dark and the Information Desk Clerk will inform passengers that the train has departed.
- General Yardmaster's panel light, for the specific track, will change to green indicating that the train will depart shortly.
- The Metra Electric Terminal Dispatcher's track panel light, for the specific track, will change to a steady green.

All lights will de-energize and go dark when the train enters the first track circuit.

During the Morning Rush Hour - The General Yardmaster will press the green button on the control panel causing the platform lights to display a green light. When the green platform light is displayed, it informs arriving train crews that their train will immediately turn and depart for 18th Street MU Yard. If the green platform light is not displayed, arriving train crews must contact the General Yardmaster unless previous instructions have been received.

During the Evening Rush Hour - The General Yardmaster will press the red button on the control panel for equipment trains arriving from yard locations. After the red button is pushed:

- Platform lights will display a red light informing train crews on equipment arriving from yard locations that passengers are being allowed down to the platform and to proceed with caution.
- Gate light will display a green light informing Information Desk Clerk to announce the train.

40 seconds before leaving, a trainman will push the TRACK button as indicated above.

When Conditions Require - The General Yardmaster may cancel a Load Light causing it to go dark. When the Load Light goes dark, it informs the Information Desk Clerk to call the General Yardmaster for an explanation and make appropriate announcements to passengers.

20.4.4 SWITCHING MOVEMENTS AT RANDOLPH STREET

A. Within Randolph Street Station:

- Arriving trains which are instructed by the General Yardmaster or the Metra Electric Terminal Dispatcher to pull equipment to South Water Street must stop at the appropriate car stop sign and unload passengers before moving equipment to South Water Street unless otherwise instructed by the General Yardmaster or the Metra Electric Terminal Dispatcher.
- All side loading doors, except control compartment occupied by the engineer, must be closed on moving equipment.
- Cars must not be coupled or uncoupled while passengers are being received or discharged.
- After couplings are made, brakes must be fully released on cars coupled into and then reapplied before breaking up the cab.

B. Setovers in Randolph Street Station will be made:

- By Engineer and Conductor - After southward movement is completed, conductor will set park brake on north car before engineer breaks up south cab. After north cab is made up park brake will be released.
- By Two Engineers - After southward movement is completed, south engineer will make a full-service brake application but will not cut out "Cab Make Up Switch" until receiving communication from north engineer that north cab is made up. If train moves north before communication is received, south engineer will immediately stop train.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

- By One Engineer - After southward movement is completed, engineer will break up south cab and open doors on one side of train to permit determination of equipment movement while walking to the other end of train. If equipment starts to move before north cab is made up, engineer will immediately stop train using any emergency valve.

20.4.5 MOVEMENT BETWEEN RANDOLPH STREET AND CP 11th Place

A. Equipment trains leaving Randolph Street destined for:

- 18th Street MU Yard must have the 'A' end diaphragm curtains disconnected before the equipment arrives at the yard and, except during inclement weather, doors on the west side of the equipment should be opened after entering the yard; prior to detraining.

B. At CP 11th Place -

- Southward trains must not pass the divide switch between Track No. 1 and Track No.2 if there is a train ahead standing at Museum Campus / 11th Street, on the track to be used, until there is sufficient space to clear divide switch.
- Between the hours of 7:30 AM and 9:00 AM, equipment trains destined for 18th Street MU Yard must not pass the divide switch No. 5A at MP 1.26 between Track No. 1 and Track No. 2 until there is sufficient room on the yard lead south of MP 1.44 for the train to clear.
- In the event of a back up of equipment trains which will delay scheduled trains, the yardmaster will immediately contact the Metra Electric Terminal Dispatcher for authority to divert equipment trains to Track No. 1. The first train diverted will stop at 14th Street crossing. When space permits, the yardmaster will resume routing trains to the yard.

C. Van Buren Storage Tracks – Other than Main Track (GCOR 6.28 applies)

- No. 4 Storage Track - Trains ready to leave the north end of No. 4 Storage Track will move to the yellow marker stake (near Monroe Street) to activate the track circuit and indicate to the Metra Electric Terminal Dispatcher that the train is ready.
- No. 5, 6 and 7 Storage Tracks – East of storage track No.4 numbered from West to East. A Derail is located on Storage Track No. 7 at M.P. 0.79 used by The Mechanical Department in accordance with Rule 5.13 (Blue Signal Protection of Workmen).

20.4.6 18th STREET MU YARD

Movements must not exceed:

- 5 MPH while switching.
- 3 MPH while washing cars.
- 3 MPH when using the Auxiliary Electrical Stick to power the equipment.

Due to close clearances of overhead piping, pantographs must not be raised or lowered in the Wash Rack.

Movements Entering the MU Shop - Movements on all tracks must stop and receive permission from the door employee before entering the MU Shop. After permission is received, movement may enter the MU Shop not exceeding 5 MPH. Pantographs may be lowered while cars are in motion.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

Movements Leaving the MU Shop - To prevent a pantograph from raising inside the MU Shop and causing damage, before pulling cars out of the MU Shop, a crew member must inspect and determine that each pantograph isolation switch is in the "ON" position until cars are outside the MU Shop and under the D.C. contact wire.

When using the Auxiliary Electrical Stick to power the equipment, stop the movement when the lead operational car is under the D.C. contact wire. Raise the pantograph on that car and move the remainder of the equipment out of the MU Shop. The pantographs on the remainder of the equipment can then be raised.

Switching Movements in the MU Yard - When practical, an engineer should be on each end of the movement. If this is not practical, the pilot in charge of the movement must determine that the blue flag has been removed and:

- If the Daily Yard Check has not been completed, the engineer must make the cut and then complete the movement operating from the north car.
or
- If the pilot has the Daily Yard Check, verbally confirm that the engineer is on the proper track and operating from the correct car. The movement cannot be made until the pilot and engineer confirm the track and car number.

20.4.7 KYD FACILITY

Track No. 4 from the derail inside the shop building to the derail outside the shop building, located 150 feet south of the south entrance door, will be used exclusively by the Engineering - Electrical Maintenance Department for storage and servicing of on-track equipment. When on-track equipment occupies the track, a Roadway Worker tag must be attached to each derail.

The derail on Track No. 4, located 150 feet south of the south entrance door, must always be in the derailing position, except when placed in the non-derailing position to permit movement in accordance with Rule 8.20 (Derail Location and Position).

The derail on Track No. 4, south of the building, will not be used to protect workmen in accordance with Rule 5.13 (Blue Signal Protection of Workmen).

20.4.8 ENGINE SERVICING AREA

Engine Servicing Area as defined in Rule 5.13 (Blue Signal Protection of Workmen) are established at the following locations:

- 18th Street MU Yard - All leads and yard tracks, beginning at STR 1.64 south to the end of all tracks.
- KYD Facility - All leads and yard tracks, except Track No. 5 as shown in Special Instruction 20.4.8, between MP 15.23 and MP 15.98, from 7:00 AM to 3:00 PM - Monday through Friday only.

Movements within these Engine Servicing Areas:

- Must receive permission from the Mechanical Department before entering.
- Will be governed by Rule 5.13F (Movement in Engine Servicing Area).
- Must not exceed 5 MPH.

Signs designating the limits of these Engine Servicing Areas are erected at each location. It is unlawful for any individual to operate a locomotive outside of the designated limits without having on their person a license identifying them as a Train Engineer, Servicing Engineer or Student Engineer.

20.4.9 TIE-UP INSTRUCTIONS - OUTLYING POINTS

At Randolph Street - A board titled "TIE-UP INSTRUCTIONS FOR TONIGHT" is located on the wall of the Crew Lounge. The numbers 1, 2, or 3, corresponding to the following tie-up instructions, will be posted on the board:

1 = TEMPERATURES 50°+

1. LVPS circuit breakers **OFF** (located in the B1 locker)
2. Emergency Light Breaker **OFF** (Located in the B-1 Locker)

2 = TEMPERATURES 35° - 50°

1. LVPS circuit breakers OFF (located in the B1 locker)
2. Emergency light breaker OFF (located in the B-1 locker)
3. Ensure service switches for blowers are ON (Located in the B-2 Locker and the A-2 Locker)

3 = TEMPERATURES 35° -

1. LVPS circuit breakers ON (located in the B1 locker)
2. Emergency light breaker OFF (Located in the B-1 Locker)
3. Interior lights and center vestibule light breakers are OFF (Located in the B-2 Locker)
4. Ensure service switches for blowers are ON (Located in the B-2 Locker and in the A-2 Locker)
5. Ensure Pan heater breaker is ON (Located in the B-2 Locker, Top Left)
6. Ensure All anti-freeze breakers, Coupler heater breakers and defrost heater breakers are ON (Located in the B-2 Locker, Top left)

Crews must close all doors and lock end doors of their train.

UNIVERSITY PARK, SOUTH CHICAGO AND BLUE ISLAND SUB DISTRICT SPECIAL INSTRUCTIONS

20.5 TOPS STATION NUMBERS

Listed below are TOPS station numbers to be used when preparing Form TTR1E. Locations and names indicated in *italics* are not shown as stations in the timetable.

UNIVERSITY PARK SUB DISTRICT

Randolph Street	000
Van Buren Street	008
11th Place	013
Museum Campus/11th Street	014
<i>18th Street - MU Yard</i>	<i>020</i>
18th Street	022
McCormick Place	027
27th Street	032
47th Street (<i>Kenwood</i>)	059
51st Street	064
53rd Street (<i>Hyde Park</i>)	065
57th Street	070
59th Street (<i>Univ. of Chicago</i>)	074
63rd Street (<i>Woodlawn</i>)	079

67th Street	083
75th Street (<i>Grand Crossing</i>)	093
79th Street (<i>Chatham</i>)	100
83rd Street (<i>Avalon Park</i>)	104
87th Street (<i>Woodruff</i>)	109
91st Street (<i>Chesterfield</i>)	114
95th Street (<i>Chgo. State Univ.</i>)	120
103rd Street (<i>Rosemoor</i>)	131
107th Street	135
111th Street (<i>Pullman</i>)	140
Kensington	145
<i>Blue Island Jct.</i>	152
<i>KYD Facility</i>	<i>158</i>
Riverdale	173

Ivanhoe	182
147th Street (<i>Sibley Boulevard</i>)	190
Harvey	200
Hazel Crest	223
Calumet	228
Homewood	235
Flossmoor	249
Olympia Fields	266
211th Street (<i>Lincoln Highway</i>)	276
Matteson	282
Richton Park	293
Richton Yard	294
University Park	315
<i>University Park Yard</i>	<i>316</i>

SOUTH CHICAGO SUB DISTRICT

67th Street	083
Stony Island	091
Bryn Mawr	097
South Shore	103
Windsor Park	108
79th Street (<i>Cheltenham</i>)	115
83rd Street	119
87th Street	125
<i>91st Street (South Chicago)</i>	<i>130</i>
<i>South Chicago (93rd Street)</i>	<i>132</i>

BLUE ISLAND SUB DISTRICT

Kensington	145
<i>Blue Island Junction</i>	<i>152</i>
State Street	156
Stewart Ridge	160
West Pullman	167
Racine Avenue	170
Ashland Avenue	179
Burr Oak	184
Blue Island	189

SYSTEM SPECIAL INSTRUCTIONS

EQUIPMENT RESTRICTIONS	PSGR MPH	FRT MPH	TRACK CAR MPH
Light Engine	35	35	
Welded Rail Trains		25	
Locomotive Cranes, Derricks, Pile Drivers		25	
Snow Plows, Flangers, Jordan Spreaders		25	
Engine Servicing and Car Shop Repair Areas	5	5	
Inspection Hi-Rail Vehicles - Jointed Rail			40
Inspection Hi-Rail Vehicles - Continuous Welded Rail			50
Maintenance of Way Hi-Rail Vehicles, Brandt Vehicle			25
Track Cars			20
D. C. Maintenance Tower Cars			20
FRA T-2000 or FRA T-10	79		
DOTX 220	70		

Brandt Vehicle Operations:

Operators must be qualified on General Code of Operating Rules or Maintenance of Way Rules to operate. When required to operate with cars attached, operators must be qualified on Freight Air Brake Rules. Operators must take into consideration that a greater distance is required to stop while operating with cars attached or slippery / wet rail.

While traveling under the supervision of a conductor pilot, the Brandt vehicle may operate on signal indication.

Canadian Pacific Track Evaluation Cars (Geometry) Consists TEC 63, 64, 65 and TEC 68:

Consists are to operate on their own with a dedicated locomotive except under special circumstances. When required to be moved in a train, they must be placed directly behind the trailing locomotive and only when authorized by the Supervisor in charge of the TEC consists. The TEC Staff will advise train crew if any restrictions apply.

These consists are authorized to operate at passenger train speed, but not exceeding 60 MPH.

TEMPERATURE SPEED RESTRICTIONS	PSGR MPH	FRT MPH
Temperature 0 to minus 10 degrees Fahrenheit	65	40
Temperature minus 11 to minus 25 degrees Fahrenheit	60	40
Temperature below minus 25 degrees Fahrenheit	50	30

When ambient temperature exceeds 95 degrees Fahrenheit, speed must be reduced 10 MPH below the maximum authorized speed where maximum authorized speed is greater than 35 MPH. This restriction does not apply where speed is 35 MPH or less on permanent or temporary speed restrictions.

When a severe weather speed restriction is required during PTC initialization, the engineer must ensure the proper speed for the train is accurate based on temperature received from the train dispatcher.

TRAIN DISPATCHER WILL ADVISE WHEN TEMPERATURE SPEED RESTRICTIONS ARE IN EFFECT.

AUTHORIZED SPEED THROUGH TURNOUT OF SWITCHES	PSGR MPH	FRT MPH
No. 20 Switches	40	30
No. 15 Switches	25	25
Through Turnout of All Switches Not Otherwise Specified	10	10

SYSTEM SPECIAL INSTRUCTIONS

MODIFICATIONS TO THE GENERAL CODE OF OPERATING RULES

The current edition of the General Code of Operating Rules is modified by these System Special Instructions which are numbered to correspond with the appropriate General Code Rule. Where the System Special Instructions add to, change or delete the General Code Rules; all portions of the rule that are not referenced remain unchanged from the GCOR.

GLOSSARY Add:

Abbreviations

BDA	Blocking Device Applied	RI.....	Rock Island
BDR	Blocking Device Removed	SC	South Chicago
BI	Blue Island	SI	Special Instructions
BV	Beverly	SSI	System Special Instructions
CCF	Consolidated Control Facility	STR	Catenary Support Structure
JA	Joliet	Sub Dist	Sub District
MDC	Metra Dispatching Center	SWS	Southwest
ME.....	Metra Electric	UP	University Park
PS.....	Passenger Station	VCP.....	Verbal Control Point

Controlled Block System (CBS) - A block system where movements are authorized by a controlled signal or verbal authority.

District - A portion of the railroad designated by timetable.

Employee Train Schedule - A publication containing the schedules of passenger trains which will designate direction, number, and movement. The Employee Train Schedule does not convey authority.

Enhanced Focus Crossover Location - A power-operated crossover location, designated in Sub District Special Instructions, requiring heightened awareness of crew members on trains consisting entirely of passenger equipment due to the difference between the maximum authorized speed and the speed restriction through the diverging route of the crossover(s).

Job Briefing - A communication tool used to ensure that everyone involved in a task knows what is to be done, how the task is to be accomplished and how to mentally prepare to accomplish it. If an employee is to perform a task alone, a mental assessment of the task must be conducted.

Job Briefings are conducted at the beginning of the job, during the job as conditions change or new tasks are started and at the completion of the job to ascertain all requirements of the task have been completed.

At a minimum a Job Briefing must define the work to be done, how the work will be done, identify potential hazards, name the employees responsible for each task, and include a follow-up Job Briefing to ascertain all required tasks of the job are complete.

Key Train – Train carrying specified numbers of loaded railcars, trailers or containers of hazardous materials.

Men or Equipment - A term referring to Roadway Workers and their related equipment.

Passenger Train - A train shown in the Employee Train Schedule.

Positive Train Control (PTC) – A safety enhancement system overlay designed to monitor and stop train movement before the train moves into a section of track for which it does not hold authority, moves into a section of track under control of employee in charge without permission or exceeds the maximum authorize speed.

Roadway Worker - Any employee of a railroad, or of a contractor to a railroad, whose duties include and who is engaged in the inspection, construction, maintenance, or repair of railroad track, bridges, roadway, signal and communications systems, roadway facilities, or electric traction systems, or in the operation of roadway maintenance machinery on or near track, with the potential of fouling a track. Roadway workers are identified by fluorescent orange work wear with reflective striping.

Sub District - A portion of a District designated by timetable.

Track Car - Motor cars, push cars, trailers, brush cutters, ballast regulators, undercutters, and hi-rail vehicles, as well as other equipment which is designated to operate on rails.

SYSTEM SPECIAL INSTRUCTIONS

Schedule Time - The time shown in the Employee Train Schedule.

Verbal Control Point - A location designated in the Special Instructions that requires train dispatcher authority to proceed from or pass.

Yard Access Crossing - A private highway-rail crossing that is located within the physical confines of a railroad yard and is either open to:

- Unrestricted public access.
- or
- Persons other than railroad employees going about their duties.

1.3.1 RULES, REGULATIONS, AND INSTRUCTIONS Add:

Crew members other than engineers, train dispatchers and control operators must maintain their qualifications over a line segment or position by making a trip or working a position covering the respective line segment or position each six months. If no service has been performed within the previous six month period, crew members other than engineers, train dispatchers and control operators must not accept work until they become re-qualified.

Engineers will be governed by the provisions of System Special Instruction 1.47.1, Item C.

Employees must notify crew management 30 days in advance of losing qualification on a line segment or position.

1.3.2 GENERAL ORDERS Add:

General Orders will be issued and canceled by the Director-Operations.

General Order information which establishes a change in the physical characteristics of the District will be removed from General Orders after having been posted for a period of six months. The condition will remain permanent.

1.3.3 CIRCULARS, INSTRUCTIONS, AND NOTICES Add:

The following Notices will be issued:

Bulletin Notices will be numbered consecutively and will be issued and canceled by the Director-Operations. They will contain information and instructions for Transportation Department personnel.

Administrative Notices will be numbered consecutively and will be issued and canceled by the Director-Operations. They will contain information and instructions concerning crew assignments, seniority rosters, vacation schedules, labor agreements, crew management issues and other administrative matters.

Road Foreman Notices will be numbered consecutively and will be issued and canceled by the Road Foremen of Engines. They will contain information and instructions concerning the mechanical operation and handling of locomotives, cars and trains.

1.4.1 GOOD FAITH CHALLENGE Add:

The Metra "Designated Review Manager" is the Director - Rules.

1.5 DRUGS AND ALCOHOL Change Second Paragraph: This will be updated

The use or possession of alcoholic beverages, intoxicants, over-the-counter or prescription drugs, narcotics, controlled substances, (to include synthetics) or medication that may adversely affect safe performance is prohibited while on duty or on company property, except medication that is permitted under Rule 1.5.1 (Metra Drug and Alcohol Policies). Employees must not have any prohibited substances in their bodily fluids when reporting for duty, while on duty or while on company property.

1.5.1 METRA DRUG AND ALCOHOL POLICIES Add:

- **Policy A** – For employees covered under the Hours of Service Act and those in safety-sensitive positions and coincides with the requirements of Federal Rules CFR Parts 40, 219, 225, 240, 242, and 382. While meeting the federal regulations as stipulated, Metra is also testing under its own policy. All employees whose job requires a Commercial Driver's License (CDL) are covered under Federal Motor Carrier Safety Administration (FMCSA)

SYSTEM SPECIAL INSTRUCTIONS

regulation.

Note: Metra employees whose jobs do not require a CDL are prohibited from driving a vehicle which requires the driver to hold a CDL.

Signal Department employees are covered under the FRA testing regulations except in the case of FMCSA required Post-Accident testing or FMCSA Reasonable Cause Testing.

- **Policy B** - For all employees not covered under "Policy A". All employees are required to read and understand this policy.

Any reference to Rule "G" in the Metra Drug and Alcohol Policies pertains to GCOR Rule 1.5 (Drugs and Alcohol).

It is possible for some legally prescribed and authorized prescription medications to affect a person's alertness or coordination and thereby prevent them from performing safely. Some examples of medications legally prescribed which may impair performance are pain relievers, muscle relaxants, sleeping pills, anti-depressants and diet pills. Though an employee may not have taken the drug while subject to duty, the presence of the drug may still be in their system. Presence of a medication which impairs alertness, coordination or reaction detected in a reasonable cause drug test, will be deemed a violation of Rule 1.5.

To protect against a violation of Rule 1.5 (Drugs and Alcohol), employees should notify the Medical Department at (312) 322-8901 or their supervisor that they are taking a medication which may impair their performance. A determination will be made whether or not the employee can be authorized to work and the employee so advised.

Drug Free Workplace Act - Unlawfully manufacturing, distributing, dispensing, possessing or using a controlled substance in the workplace is strictly prohibited. Any employee found in violation of this policy is subject to discipline, up to and including dismissal.

The Act also requires that any employee convicted of a drug violation at a workplace location must report such conviction to their employer within five days of the date of conviction. The employer must notify the Federal Government within ten days after receipt of this information.

1.14 EMPLOYEE JURISDICTION Add:

Except within the Amtrak Chicago Terminal, between CP Canal and 21st Street interlocking; the Chicago Operating Rules Association (CORA) Operating Guide is in effect on all railroads operating within the Chicago Terminal District. This District is defined as the trackage inside and including the circumference of the Canadian National Railway, unless specified otherwise in individual railroad sections.

Operating crews traversing the property of another railroad within this territory will be governed by their home road rules and special instructions, except for those rules specified in the particular section of the CORA Operating Guide of the railroad over which the train is being operating. Each railroad section of the CORA Operating Guide will include information relative to operating over the particular line segment. Within the Amtrak Chicago Terminal, Metra operating crews will be governed by the current Amtrak Chicago Terminal Timetable.

Metra operating crews must have current copies of the CORA Operating Guide, including Updates, and Amtrak Chicago Terminal Timetable they can refer to while operating over these territories.

1.17 HOURS OF SERVICE LAW Add New Item C:

C. Recordkeeping

Employees working positions covered by the hours of service law must record and submit their time on the prescribed form in accordance with posted instructions. Employees must have properly completed form with them and available for inspection by the proper authority while on duty.

SYSTEM SPECIAL INSTRUCTIONS

1.22 NOT PERMITTED ON EQUIPMENT Add:

Persons, other than crew members in the performance of duty, authorized to ride Metra locomotives, control car cabs and the front vestibule of highliner cars:

- District Transportation, Mechanical and Engineering Officers:
 - Director-Operations, Asst. Superintendents, Trainmasters and Road Foreman of Engines.
 - Director-Mechanical and Shop Superintendents-Locomotive and Car.
 - Director-Engineering and Director-Electrical Maintenance.
- Deputy Executive Director-Operations and Chief Transportation, Mechanical and Engineering Officers.
- Director-Rules, Rules Examiners, Supervisor-Locomotive Engineers, Asst. Supervisors-Locomotive Engineers, Director-Safety, Safety Officers and PTC Test Engineers.
- FRA Operating Practices Inspectors with proper identification.
- Director-System Operations, Sr. Manager-Train Operations, Chief and Asst. Chief Dispatchers.
- Train Dispatchers and Control Operators over their assigned territories.
- Yardmasters, Mechanical Foremen, Electricians and Metra Police Officers in performance of duty.
- Roadmasters and Signal Supervisors over their assigned territories.

Unless otherwise authorized by a District Transportation Officer, not more than four persons may occupy the locomotive cab.

Other persons riding Metra locomotives, control car cabs and the front vestibule of highliner cars must have a letter of authority signed by the Director-Operations.

1.27 DIVULGING INFORMATION Add:

Metra has a Media Relations Office to handle inquiries regarding matters of public interest. Employees asked to give statements to anyone not employed by the railroad should refer those individuals to the Director-Operations. Employees must not give voluntary statements or supply information concerning the railroad without proper authority.

1.40 REPORTING ENGINE DEFECTS Add:

If the alerter or deadman control fails enroute:

- Notify the Train Dispatcher, a Transportation Officer and the Mechanical Department as soon as possible.
- The engineer must apply a tag to the defective device and note the failure on the work report.

If the device cannot be repaired at the train's next terminal, a Transportation Officer or Mechanical Department representative will designate different equipment to be used, if necessary.

A supply of tags is available in the electric locker (near the battery switch) on locomotives, on the center shelf on control cars and in the crew locker on Highliner cars.

1.40.1 WORKING ALERTER OR DEADMAN CONTROL Add New Rule:

Locomotives must not be operated as the lead unit of a passenger train, outside ACS, ATC, or ATS Territory, unless equipped with a working alerter or deadman control.

A. Locomotives Equipped with Both an Alerter and a Deadman Control

If the locomotive is equipped with both an alerter and a deadman control and either the alerter or the deadman control fail enroute, the train may proceed but repairs must be made by the next daily inspection.

If both the alerter and the deadman control fail enroute, comply with instructions 1 and 2 of Item B shown below.

SYSTEM SPECIAL INSTRUCTIONS

B. Locomotives Not Equipped with Both an Alerter and a Deadman Control

If the locomotive is not equipped with both an alerter and a deadman control and the alerter or the deadman control fails enroute:

1. The train may proceed but:
 - A promoted crew member must occupy the control cab with the engineer.
or
 - The engineer must maintain radio communication with a second crew member until the train reaches the next terminal.
2. When the train reaches its next terminal or the locomotive undergoes its next calendar inspection, whichever occurs first:
 - The alerter or deadman control must be repaired.
or
 - The locomotive must be removed as the controlling locomotive.

"Terminal" as used in this Rule, means the starting point or ending point of a single scheduled trip for a train, where passengers may get on or off a train. Normally this location is a point where the train would reverse directions or change destinations.

A tag shall be prominently displayed in the control cab to indicate that the alerter or deadman control device is defective until the device is repaired.

1.47 DUTIES OF CREW MEMBERS

A. CONDUCTOR RESPONSIBILITIES Change and Add:

Change Last Paragraph of Item 3 to Read:

The conductor must inform the engineer after the train departs the last passenger stop, but not less than 1 mile from the restriction.

Add New Item 6:

6. At the beginning of their tour of duty and before each trip, the conductor must conduct a job briefing with all crew members before leaving the initial station.

The Job Briefing will cover all information related to the trip and must always include:

- General orders, notices and daily operating bulletin in effect and track bulletins which will affect the trip.
- Crossover speeds at Enhanced Focus Crossover Locations.
- Cars to be opened for passenger loading.
- Spotting of train at short platforms.
- Unscheduled stops.
- Which crew member will operate the car doors and make announcements.
- Auditing and collection of fares.
- Enroute switching - Transfer and Work Train Service.
- Watch comparison.

Crew members meeting trains enroute must immediately contact the conductor for instructions and/or information that affects the trip. The intercom may be used to contact the conductor.

SYSTEM SPECIAL INSTRUCTIONS

C. ALL CREW MEMBERS' RESPONSIBILITIES

Add New Item 4:

4. Crew members are jointly responsible to make verbal communications between each other and confirm it is properly understood when any of the following work activities apply to them:
 - Switches are properly lined and/or locked, visually confirming route to be used.
 - Derails are properly applied or removed and visually checked.
 - Hand brakes are applied or released.
 - Shoving movements are protected.
 - Employees crossing between freight cars or on-track maintenance of way equipment.
 - When a situation changes.
 - When entering a track with restricted clearance.
 - When cars or engines are left fouling another track during switching.
 - Before entering a main track to confirm movement authority.
 - Before reporting a track release.

Add New Item 5:

5. Crew members must be on the equipment at least 15 minutes prior to departure time to initialize PTC, making sure information being entered into the CDU is correct (i.e. DOB number, employee number, employee pin). A crew member must call the appropriate train dispatcher to check for changes or voids on the DOB and advise if their train cannot depart on time.

Add New Item D:

D. OBSERVE AND CALL SIGNALS

If the engineer is solely occupying the control compartment of a train, they must verbally communicate to a promoted crew member on the train:

- The name or aspect of:
 - All absolute signals displaying a signal aspect less favorable than Clear.
 - All signals governing the approach to absolute signals displaying a signal aspect less favorable than Clear.
 - All signals displaying an Approach or less favorable signal aspect where the Maximum Authorized Speed is greater than 30 MPH.
- The prescribed speed through the turnouts of an Enhanced Focus Crossover Location when:
 - The signal in advance of that location displays Rule 9.1.7 - Approach Diverging or Rule 9.1.11 - Diverging Approach Diverging.
 - or
 - It is determined that the train will make a diverging movement at that location.

Each transmission must be acknowledged by the crew member on the train. If the crew member fails to acknowledge the communication, the engineer must determine the reason for failure to acknowledge prior to leaving the next passenger stop. Communication will include:

- Train identification.
- Name or Aspect of signal.
- Location of signal.
- Track designation if in multiple track territory.

If the engineer fails to properly control the speed of the train, the crew member must immediately communicate with the engineer. If necessary, the crew member must stop the train.

If the next signal in advance changes to a more favorable indication, the engineer must communicate the change to the designated employee.

SYSTEM SPECIAL INSTRUCTIONS

If the radio is inoperative, the communication must be made by intercom, public address system or in person.

Verbal communication is required. Use of the buzzer or communicating signal is prohibited.

These requirements do not apply in territories where specified in Sub District Special Instructions.

1.47.1 LOCOMOTIVE ENGINEER CERTIFICATION Add New Rule:

- A. It is unlawful for any individual to operate a locomotive outside of a locomotive servicing area without having on their person a license identifying the individual as a Train Engineer, Servicing Engineer, or Student Engineer.
1. Train Engineers may operate locomotives singly or in multiples with or without cars coupled to the locomotive.
 2. Servicing Engineers:
 - May operate locomotives singly or in multiples but may not move locomotives with cars coupled to them.
 - May couple or uncouple locomotives from cars.
 - Are not permitted to operate locomotives on a main track.
 3. Student Engineers may operate only under direct and immediate supervision of an Instructor Engineer.
- B. Train Engineers and Servicing Engineers can be authorized to operate their train or locomotive for the remainder of their tour of duty if their license is lost, stolen, damaged or inappropriately taken by a law enforcement agency. Authorization may be granted by the Supervisor-Locomotive Engineers, Director-Operations or his designee, or by the Director-Mechanical, if the Servicing Engineer is under Mechanical Department jurisdiction; when the employee furnishes the Supervisor-Locomotive Engineers or Director with their name, employee number and the circumstances surrounding the missing or damaged license. This authorization shall not exceed 24 hours and the Office of the Supervisor-Locomotive Engineers must be notified immediately if authorization is granted by a Director. The license must be replaced prior to the Engineer's return to service on their next tour of duty.
- C. Train Engineers lose their qualification over a line segment or joint authority territory if they have not performed service over the line segment or territory in a 90 day period. Train Engineers must not accept an assignment to work over a line segment or joint authority territory when called by Crew Management if they have failed to maintain their qualification. Train Engineers must notify Crew Management 30 days in advance of the expiration of their qualification over any line segment or joint authority territory.
- D. Metra is obligated by Federal Regulation to revoke the license of Train Engineers and Servicing Engineers for violations of its operating rules and practices as follows:
1. Failure to control a locomotive or train in accordance with a signal indication, excluding a hand or a radio signal indication or a switch that requires a complete stop before passing it.
 2. Failure to adhere to limitations concerning train speed when:
 - The speed at which the train was operated exceeds the maximum authorized speed by at least 10 MPH.
 - or
 - Operating at restricted speed or in accordance with Rule 6.28 (Movement on Other than Main Track) and failure to stop within one half the engineer's range of vision caused a reportable accident or incident under 49 CFR 225 - Railroad Accidents/ Incidents.

SYSTEM SPECIAL INSTRUCTIONS

3. Failure to adhere to procedures for safe use of train or engine brakes when the procedures are required for compliance with:
 - 49 CFR 232 - Brake System Safety Standards for Freight and Other Non-Passenger Trains and Equipment;
End of Train Devices:
 - a. Class I brake test - initial terminal inspections.
 - b. Class II brake test - intermediate inspections.
 - c. Transfer train brake tests.or
 - 49 CFR 238 - Passenger Equipment Safety Standards:
 - a. Class I brake tests.
 - b. Class IA brake tests.
 - c. Class II brake tests.
 - d. Running brake tests.
4. Occupying a main track or segment of track without proper authority or permission.
5. Failure to comply with prohibitions against tampering with locomotive mounted safety devices, or knowingly operating or permitting to be operated a train with an unauthorized disabled safety device in the controlling locomotive.
6. Incidents involving noncompliance with Rule 1.5.

If in any single incident the person's conduct involves more than one operating rule or practice, that event shall be treated as a single violation.

A Designated Supervisor of Locomotive Engineers, locomotive engineer pilot or instructor engineer who is monitoring, piloting or instructing a locomotive engineer and fails to take action to prevent a violation of the above operating rules and practices, by warning the engineer of the potential or foreseeable violation, shall have his or her license revoked.

- E. Licenses will be revoked due to specific conduct violations and a period of ineligibility will be determined in accordance with the following standards:
 1. In cases of a single incident involving violation of one or more of the operating rules or practices described in Items D 1 through D 5, the person shall have his or her license revoked for a period of one month.
 2. In cases of two separate incidents involving a violation of one or more of the operating rules or practices described in Items D 1 through D 5, that occurred within 24 months of each other, the person shall have his or her license revoked for a period of six months.
 3. In cases of three separate incidents involving a violation of one or more of the operating rules or in Items D 1 through D 6, that occurred within 36 months of each other, the person shall have his or her license revoked for a period of one year.
 4. In cases of four separate incidents involving a violation of one or more of the operating rules or practices described in Items D 1 through D 6, that occurred within 36 months of each other, the person shall have his or her license revoked for a period of three years.
 5. Different periods of ineligibility may result when incidents of noncompliance occur under the provisions of Item D 6.
- F. At Metra's discretion, a person whose license has been denied or revoked for a period of one year or less for specific conduct failures covered in Items D 1 through D 5 shall be eligible for reinstatement of the license prior to the expiration of the initial period of ineligibility. Such person shall not be eligible for grant or reinstatement unless and until:
 - The person has been evaluated by the Supervisor of Locomotive Engineers, or designee, and determined to have received adequate remedial training.

SYSTEM SPECIAL INSTRUCTIONS

- The person has successfully completed any mandatory program of training or retraining, if that was determined to be necessary prior to return to service.
- At least one half the period of ineligibility has elapsed.

1.47.2 CONDUCTOR CERTIFICATION Add New Rule:

The Federal Railroad Administration has mandated that all persons authorized by the railroad to perform the duties of a Conductor be issued a Certificate. The Certificate must be issued to each person that the railroad designates as a Conductor.

- A. A Conductor who has received a Certificate is required to follow the guidelines listed below in order to comply with this regulation.
1. Have the Certificate in his/her possession while on duty as a conductor
 2. Display the Certificate upon request from:
 - FRA
 - State Inspector
 - Officer of issuing railroad
 - Officer of another railroad during joint operations
- B. In the event a Certificate is forgotten, lost, stolen or damaged, the conductor must notify a district officer immediately. The officer may authorize in writing, a temporary License until the original can be retrieved or replaced. At a minimum, a temporary replacement must identify the person to whom it is being issued to include the following:
- Name
 - Metra Identification #
 - Year of birth
 - Date of Issuance (temp.)
 - Name of Supervisor authorizing

Temporary Certificates may be delivered electronically and shall not exceed a 72-hour period. The Training and Certification Department must be notified once a temporary license is issued.

- C. Metra is obligated by Federal Regulation to revoke the license of a Conductor for violations of its operating rules and practices as follows:
1. When the conductor is located in the operating cab, or otherwise has knowledge of the signal indication, failure to take appropriate action to prevent the locomotive engineer of the train the conductor is assigned to from failing to control a locomotive or train in accordance with a signal indication that requires a complete stop before passing it, excluding a hand or a radio signal indication or a switch.
 2. When a Conductor is located in the operating cab, failure to take appropriate action to prevent the locomotive engineer of the train assigned to from failing to adhere to the following limitation concerning train speed. The speed at which the train was operated exceeds the maximum authorized limit by at least 10 miles per hour. Where restricted speed is in effect, railroads shall consider only those violations of the conditional clause of restricted speed rules part 225. When not in the operating cab, the conductor is deemed to have taken appropriate action when in compliance with all applicable Railroad Operating Rules and Special Instructions.
 3. Failure to perform or have knowledge that a required brake test was performed.

SYSTEM SPECIAL INSTRUCTIONS

4. Occupying main track or a segment of main track without proper authority or permission.
5. Knowingly fail to take appropriate action to prevent the Locomotive Engineer of the train the conductor is assigned to comply with prohibitions against tampering with a locomotive safety device.
6. Use of alcohol and/or drugs contrary to Federal Regulations.

49 CFR 218 Subpart F – Handling Equipment, Switches and fixed Derails

- 218.99-Shoving or pushing movements
- 218.101-Leaving equipment in the clear
- 218.103-Hand operated crossovers
- 218.105-Hand operated mainline switches
- 218.107-Hand operated crossover switches
- 218.109-Hand operated fixed derails

Violations under 49CFR 218 Subpart F will only be considered if a reportable accident or incident under 49 CFR Part 225.

1.47.3 APPROACHING STATIONS AND TERMINALS WITH BUMPING POST Add New Rule:

On Passenger Trains, at locations designated by District Special Instructions contained in Timetable, General Order or Operations Notice, if a Locomotive Engineer is solely occupying the control cab approaching a Station or Terminal with a Bumping post, the Conductor and Engineer must:

- Communicate by radio the location and track the train is currently operating on
- The Conductor be positioned in a vestibule to take appropriate action

The Locomotive Engineer will initiate a radio transmission at the predetermined location by District Special Instructions. When the Engineer fails to initiate communication, the Conductor must contact the Engineer in advance of the location where action should be taken. If no communication is established, the Conductor must stop the train.

1.48 TIME Add:

Correct time can be obtained from any touchtone telephone by dialing 312 322-6900 followed by 8463 (TIME). On company telephones dial 8463 (TIME).

1.48.1 CHANGE OF TIME Add New Rule:

The "Uniform Time Act of 1966", as amended by the "Energy Policy Act of 2005", provides in part that the standard time of each time zone shall be advanced one hour or set back one hour as follows:

- At 2:00 AM on the second Sunday in March, each year, standard time is advanced one hour to 3:00 AM.
- At 2:00 AM on the first Sunday in November, each year, standard time is set back one hour to 1:00 AM.

Watches and clocks must be changed accordingly and time compared as outlined in Rule 1.48 (Time).

2.17 RADIO TESTING Add New Second Paragraph:

Crew members must test radios to be used on passenger trains as soon as possible:

- Before beginning their initial trip each day.
- Before beginning each trip with new equipment.

SYSTEM SPECIAL INSTRUCTIONS

2.18 MALFUNCTIONING RADIO Add New Second Paragraph:

If the radio on a controlling locomotive is found to be inoperative at the train's initial terminal, the locomotive must not be operated as the lead unit out of the train's initial terminal unless:

- The radio is repaired or replaced.
- or
- An alternative radio or wireless communication device is provided.

2.21 ELECTRONIC DEVICES Change Entire Rule:

This rule outlines the requirements for use of electronic devices. As used in this rule, the following definitions apply;

Electronic Device means an electronic or electrical device used to conduct oral, written, or visual communication; place or receive a telephone call; send or read an electronic mail message or text message; look at pictures; read a book or other written material; play a game; navigate the Internet; navigate the physical world; play, view, or listen to a video; play, view or listen to a television broadcast; play or listen to music; execute a computational function; or, perform and other function that is not necessary for the health or safety of the person and that entails the risk of distracting the employee or another employee from a safety-related task.

Railroad operating employee means an individual who is:

- Engaged in or connected with the movement of a train including a Hostler.
- A train employee providing commuter or intercity rail passenger transportation.
- or
- Subject to hours of service governing train service employees.

The use of any electronic device is prohibited if that use would interfere with any employee's performance of safety-related duties.

A. Personal or Railroad Supplied Electronic Devices

Personal or railroad supplied electronic devices may be used as necessary:

- To respond to an emergency situation involving the operation of the railroad.
- To respond to an emergency encountered while on duty.

A railroad supplied electronic device may be used as a communication device in the event of radio malfunction.

B. Personal Electronic Devices

Except as otherwise provided, railroad operating employees on duty (including railroad supervisors) must have each personal electronic device turned off and stowed out of sight with any earpiece removed from the ear.

A railroad operating employee may use a personal electronic device only when:

- Deadheading in other than a controlling locomotive.
- Deadheading in the body of a business car, passenger train or company provided vehicle.
- or
- Relieved from duty and inside layover facilities or stations.

A crew member of an Empty Equipment movement is not deadheading.

A railroad supervisor may use a personal electronic device when inside a railroad office.

A personal stand-alone camera may be used to take a photograph of a safety hazard or a violation of a rail safety law, regulation, order, or standard, provided that:

SYSTEM SPECIAL INSTRUCTIONS

- A safety briefing is conducted among all crew members and any other individuals in the controlling cab of moving equipment.
- It is turned off immediately after the photograph has been made.
- It is not used by an employee at the controls of moving equipment.

A personal stand-alone calculator, digital watch whose only purpose is as a timepiece and medical devices that are consistent with the railroad's standards may be used as necessary in the performance of duties.

All other personal electronic devices must be turned off inside the controlling cab of a locomotive, train or on-track equipment.

C. Railroad Supplied Electronic Devices

Railroad operating employees and railroad supervisors may use railroad supplied electronic devices to send or receive work related information with:

- Railroad supervisors.
- Railroad customers.
- Railroad dispatchers.
- Railroad customer service employees.
- or
- Other railroad employees as necessary in the performance of their duties.

Railroad operating employees may use a digital storage and display function of a railroad supplied electronic device to refer to a railroad rule, special instruction, timetable, or other directive provided train is stopped and use does not interfere with any employee's performance of safety-related duties and all other crew members have been briefed on its limited use.

A railroad supplied electronic device must not be used for purposes other than for which it was intended or while:

- Operating the controls of a moving locomotive.
- On the ground within 4 feet of any track.
- On the ground and engaged in an active switching operation.
- Riding rolling equipment during a switching operation.
- At the controls of the locomotive and any other employee is assisting in the preparation of the train, engine(s), or on-track equipment, including testing of railroad equipment or brakes.
- Inside or outside the controlling cab of a locomotive, train or on-track equipment, unless there has been a safety briefing and all crew members agree that it is safe to do so.
- Verbally obtaining or releasing mandatory directives when railroad radio communication is available.

Railroad supplied electronic devices may be used in the body of a business car or passenger train for railroad business when it will not interfere with an employee's performance of safety-related duties.

Metra supplied telephones or iPads are considered a personal electronic device when used for other than an authorized business purpose.

D. Railroad Authorized Electronic Devices

Use of other railroad authorized electronic devices, such as a laptop computer or video camera to monitor, diagnose/troubleshoot, or video record is permitted on a standing or moving train:

- By an employee or contractor other than a crew member or the employee at the controls.
- After a safety briefing is conducted and all crew members agree it is safe to do so.

SYSTEM SPECIAL INSTRUCTIONS

4.3 TIMETABLE CHARACTERS Add:

The following characters placed in the column provided in the timetable indicate:

A	-	Ticket Clerk	R	-	Radio
B	-	General Order Board	S	-	Siding
D	-	Passenger Stop	T	-	Turntable or Wye
E	-	Locomotive Servicing Facility	V	-	Verbal Control Point
F	-	Facsimile Machine/Remote Printer	W	-	Accessible Station
H	-	Control Point	X	-	Crossover
J	-	Junction	X(2)	-	Multiple Crossovers
M	-	Manual Interlocking	Y	-	Yard
P	-	Telephone/PAL Telephone	Z	-	Spring Switch
Q	-	Company Telephone			

4.4 EMPLOYEE TRAIN SCHEDULE Add New Rule:

Schedules of passenger trains are shown in the Employee Train Schedule. Employees concerned or whose duties are affected by the movement of these trains must have a copy in their possession while on duty. The Employee Train Schedule does not convey authority.

Sunday schedules are in effect on New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day.

4.4.1 SCHEDULE TIME Add New Rule:

Where one time is shown, it is the leaving time; except at terminating stations, it is the arriving time. Where two times are shown, they are the arriving and leaving times.

Times shown in shading are approximate times which do not restrict train movement. Times not shaded indicate a regular stop and trains must not leave ahead of these times. At Flag Stops, trains will stop to discharge passengers on notice to Conductor and to pick up passengers on station platform visible to the Engineer.

Except as otherwise provided, trains scheduled to receive or discharge passengers must not leave the point where passengers are received or discharged before the leaving times shown. Schedule times shown for Empty Equipment Trains are for information only. Empty Equipment Trains may operate in advance of these times.

4.4.2 SCHEDULE SYMBOLS Add New Rule:

The following symbols when placed in the schedule column of the Employee Train Schedule indicate:

A	-	Arrive
L	-	Leave
Y	-	Arrive or Leave Yard
s	-	Regular Stop
T	-	Transfer
FD	-	Stop on request only to discharge passengers from center vestibule of head car only.
f	-	Flag Stop
DH	-	Empty Equipment Train

5.2.3 COMMUNICATING SIGNALS Add New Rule:

Each car of a passenger train must be connected with the locomotive by a communicating signal device. The radio, intercom or other wireless communication device may be used in place of communicating signals to convey information. Should the systems become inoperative, an understanding must be established for the use of hand signals.

SYSTEM SPECIAL INSTRUCTIONS

The signals prescribed are illustrated by “o” for short sounds and “—” for long sounds.

<u>Sound</u>	<u>Indication</u>
(a) oo	When standing, start.
(b) oo	When running, stop.
(c) 000	When standing, back.
(d) 000	When running, stop at next station.
(e) 0000	When running, reduce speed.
(f) 00000	When standing, recall flagman.
(g) —	Running test completed; elsewhere, when running, look back for hand signals. When standing, apply or release air brakes.
(h) — — o	Approaching location where movement is restricted


5.4.1 TEMPORARY RESTRICTIONS Change First Paragraph and Delete Second Paragraph:

Track bulletins, track warrants, track permits, or general orders may restrict or stop train movements because of track conditions, structures or men or equipment. Yellow flags are used to indicate temporary speed restrictions. Yellow-red flags are used to indicate when a train may be required to stop. When flags are not displayed, that information will be included in the track bulletin, track warrant, track permit, or general order.


5.4.2 DISPLAY OF YELLOW FLAG Change Entire Rule:

A. Restriction Is In Effect

One Mile Ahead of Restricted Area: Yellow flags warn trains to restrict movement because of track conditions or structures. To make sure train movement is restricted at the right location, employees must display a yellow flag 1 mile before the restricted area.

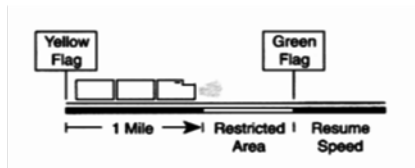

Less Than One Mile Ahead of Restricted Area: When the restricted area is close to a terminal, junction, or another area, employees will display the yellow flag less than 1 mile before the restricted area. This information will also be included in the track bulletin, track warrant, track permit, or general order.

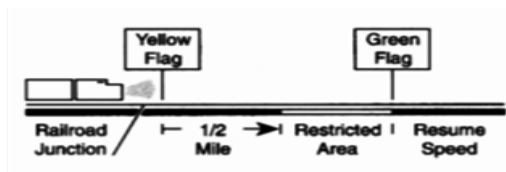

When the maximum authorized speed is 35 MPH or less over the entire Sub District, low profile yellow flags will be displayed between the rails at the limits of the restriction.


SYSTEM SPECIAL INSTRUCTIONS

Once the Train Reaches the Restricted Area: The speed specified by track warrant, track bulletin, track permit, general order or radio speed restriction must not be exceeded until the rear of the train clears the restricted area.

B. Restriction Is Not in Effect

When a yellow flag is displayed, and no restriction is in effect as specified by a track bulletin, track warrant, or general order, once the train is 1 mile beyond the yellow flag, crew members must:

1. Continue moving the train but at a speed not exceeding 10 MPH.
2. Resume speed only after the rear of the train has:
 - a. The rear passed a green flag.
 - or
 - b. The rear of the train has traveled 3 miles beyond the yellow flag and train dispatcher has verified that no track bulletin or track warrant is in effect specifying a temporary speed restriction at that location.

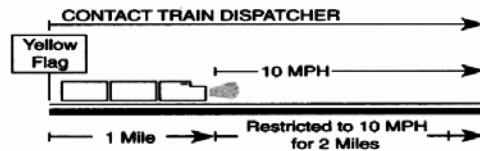


5.4.3 DISPLAY OF YELLOW-RED FLAG Change Entire Rule:

Yellow-red flags may be displayed from one hour before to one hour after a track bulletin Form B is in effect. During the hour before and the hour after the Form B is in effect, an attempt must be made to contact the employee in charge (EIC) when Yellow-red flags are displayed. The (EIC) may provide instructions to proceed without restriction, specifying the track bulletin number. If contact with the (EIC) is not established, Rule 5.4.3B (Restriction Is Not in Effect) will apply.

The display of yellow-red flags as described does not extend the authorized working limits beyond the times listed on the track bulletin Form B.


A. Restriction Is In Effect

One Mile Ahead of Restricted Area: Yellow-red flags warn a train to be prepared to stop because of men or equipment. To make sure the train is prepared to stop at the right location; employees must display a yellow-red flag 1 mile before the restricted area.

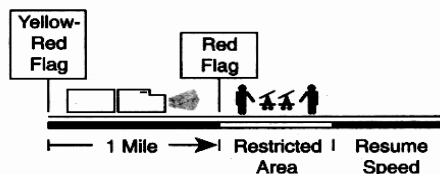

Less Than One Mile Ahead of Restricted Area: When the restricted area is close to a terminal, junction or another area, employees will display the yellow-red flag less than 1 mile before the restricted area. This information will also be included in the track bulletin, track warrant, track permit, or general order.

SYSTEM SPECIAL INSTRUCTIONS

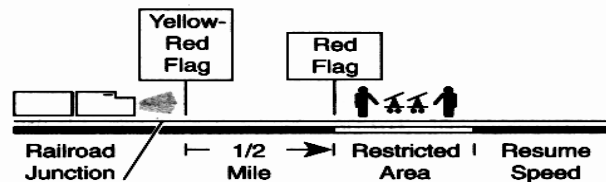

When the maximum authorized speed is 35 MPH or less over the entire Sub District, low profile yellow-red and red flags will be displayed between the rails as indicated above.

B. Restriction Is Not In Effect

When a yellow-red flag is displayed and no restriction is in effect as specified by a track bulletin, track warrant, track permit or general order, a crew members must attempt to contact the employee in charge of the yellow-red flag. Crew members must be prepared to stop short of a red flag 1 mile beyond the yellow-red flag. If a red flag is displayed, proceed as outlined in Rule 5.4.7 (Display of Red Flag). If no red flag is displayed and no instructions have been provided by the employee in charge of the yellow-red flag:

1. Move at restricted speed.
2. Increase speed only after:
 - a. A crew member has received permission from the employee in charge.
or
 - b. The leading wheels of movement are 3 miles beyond the yellow-red flag, and the train dispatcher has verified that no track bulletin protecting men or equipment is in effect at that location.

Yellow-red flags will not be displayed:

- When roadway workers and/or equipment are working under track and time, track permit or foul time.
or
- In advance of orange working limits banners displayed by Flagmen.

5.4.5 DISPLAY OF GREEN FLAG Add a New Last Paragraph:

When the maximum authorized speed is 35 MPH or less over the entire Sub District, low profile green flags will be displayed between the rails at the end of the temporary speed restriction.

5.4.6 DISPLAY OF FLAGS WITHIN CURRENT OF TRAFFIC Change Item B:

B. Yellow-Red Flags

Flags protecting men or equipment must be placed in both directions on each track affected when restriction is not in effect as specified by a track bulletin, track warrant, track permit or general order.

5.4.7 DISPLAY OF RED FLAG Add:

Add New Third Paragraph:

When the maximum authorized speed is 35 MPH or less over the entire Sub District, low profile red flags will be displayed between the rails at the limits of track bulletins Form B and Form D when the employee in charge is a Foreman.

Displayed Between Rails. Add New Last Sentence:

Low profile red flags are not required to be removed before the train may proceed.

SYSTEM SPECIAL INSTRUCTIONS

5.5 PERMANENT SPEED SIGNS Change and Add:

Change First Paragraph:

Except as shown in Sub District special instructions, permanent speed restriction signs, where installed, will be placed 1,320 feet in advance of permanent speed restrictions. Signs may be placed to the left or right of main track as viewed by an approaching train. Numbers on the face of these signs indicate the highest speed permitted over the limits of the restriction.

Passenger Train Crossover Speed Signs Add:

Passenger train crossover speed signs will be placed 1,320 feet in advance of power-operated crossover switches between main tracks in territory where Maximum Authorized Speed or Permanent Speed restrictions for passenger trains are greater than 30 MPH. Signs will be placed on the field side of outside main tracks as viewed by an approaching train. The number on the face of the sign indicates the highest speed permitted for trains consisting entirely of passenger equipment through the diverging route of the crossover.

Crew members of trains consisting entirely of passenger equipment making diverging movement through the crossover must not exceed the speed shown on the crossover speed sign until the rear of the train has cleared the crossover.

5.8.1 RINGING ENGINE BELL Change Third and Fourth Bullets and Add New Bullets:

- Approaching and passing roadway workers working on or near the track.
- Approaching public crossings at grade, including authorized pedestrian crosswalks, with the engine in front start signal at the crossing sign. If no sign, or if movement begins between sign and crossing, start signal soon enough before crossing to provide warning. Continue ringing bell until crossing is occupied.
- Approaching and passing station platforms at passenger stations.
- Approaching flag stops.
- In all enclosed structures.

5.8.2 SOUNDING WHISTLE Add:

Whistle signal 5.8.2(7) must be sounded, regardless of any whistle prohibitions, when meeting or passing the head end or rear end of a train that is:

- Stopped, standing or starting from a station platform, except at downtown Chicago terminals or stations with high level platforms.
or
- At or near a grade crossing.

5.8.3 WHISTLE FAILURE Add:

When approaching roadway workers, notify them of whistle failure by radio when possible.

5.9.1 DIMMING HEADLIGHT Change first paragraph to read:

Approaching public crossings at grade with engine in front, the headlight must be on bright at the Whistle Post Sign. If no sign, the headlight must be displayed $\frac{1}{4}$ mile before occupying the crossing. If movement begins between sign and crossing, the headlight must be on bright soon enough before the crossing to provide warning.

5.9.5 DISPLAYING DITCH LIGHTS Add:

When contacting roadway workers, advise them when ditch lights are not working properly. Also advise crew members of the failure. Employees must advise trains when ditch lights are observed not working properly.

SYSTEM SPECIAL INSTRUCTIONS

5.10 MARKERS Add New Second Paragraph:

Locomotives, MU cars and cab control cars are equipped with stationary red lights. These lights must be displayed to the rear of each passenger train occupying a main track.

5.11 ENGINE IDENTIFYING NUMBER Change Entire Rule:

Passenger trains will be identified by schedule number shown in current Employee Train Schedule. Passenger trains not shown in the Employee Train Schedule and other trains will be identified by initials and engine number, adding the direction when required. When an engine consists of more than one unit or when two or more engines are coupled, the number of one unit only will be used, and illuminated if equipped, as the identifying number. When practical use the leading unit.

5.17 ORANGE WORKING LIMITS BANNERS Add New Rules:

5.17.1 Display of Orange Working Limits Banner

Orange working limits banners are displayed to establish working limits, protecting roadway workers and/or equipment, at locations where trains or on-track equipment must stop. The orange working limits banner is made of orange material with the words "WORKING LIMITS" stenciled on it.

A. Main Tracks and Controlled Sidings

Orange working limits banners can be displayed on main tracks or controlled sidings at or within the limits of the following authorities:

- Form B Track Bulletin
- Form D Track Bulletin
- Joint Track and Time
- or
- Joint Track Permit

At or within the limits of the above authorities, trains or on-track equipment approaching an orange working limits banner must stop short of the orange working limits banner and not proceed unless the employee in charge gives verbal permission, including the milepost location of the orange working limits banner.

If verbal permission is received before the train or on-track equipment stops, the train or on-track equipment may pass the orange working limits banner without stopping.

Within current of traffic, banners must be placed in both directions on each track affected.

B. Other than Main Tracks and Controlled Sidings

Orange working limits banners can be displayed on other than main tracks or controlled sidings.

On other than main tracks or controlled sidings, trains or on-track equipment approaching an orange working limits banner must stop short of the orange working limits banner and not proceed unless the employee in charge gives verbal permission. If verbal permission is received before the train or on-track equipment stops, the train or on-track equipment may pass the orange working limits banner without stopping.

5.17.2 Banner Location

Banners will be displayed only on the track affected. They must be displayed to the right of the track as viewed from approaching train or on-track equipment, except in multiple main track territory or where sidings are adjacent to main track(s), they will be placed on the field side of outside tracks. Banners will be placed in this manner unless otherwise specified by track bulletin, track warrant, special instructions, or general order.

When banners are displayed beyond the first rail of an adjacent track, the banners will not apply to the track on which the train or on-track equipment is moving.

SYSTEM SPECIAL INSTRUCTIONS

When banners are displayed for a main track or controlled siding where no Form B or Form D Track Bulletin, no Track and Time or no Track Permit is in effect; trains or on-track equipment must stop short of the banner, if consistent with good train or equipment handling. After stopping, the train or on-track equipment must proceed at restricted speed until the head end is 1 mile beyond the banner. The location of the banner must be reported to the train dispatcher.

6.2.1 TRAIN LOCATION Add New Second and Third Paragraphs Following the Bullets:

The main track must not be entered or fouled until the train has passed the point where the track will be entered or fouled.

Maintenance of way employees issued authority to occupy a main track or controlled siding behind a train must inform the train movement that they will be entering or fouling the track behind the train. Trains informed that maintenance of way employees will enter or foul the track behind their train must obtain permission from the employee in charge before making a reverse movement including within the same signaled block.

6.3 MAIN TRACK AUTHORIZATION Add:

- Rule 9.14.2 (Controlled Block System)

6.3.1 TRAIN COORDINATION

Item A Does Not Apply on Metra Operated Districts.

Change Item C Title to Read:

C. Rule 9.14 (Current of Traffic) or Rule 9.14.2 (Controlled Block System)

6.5 Shoving Movements add Language: (For Metra Trains Only):

When yarding a train, the Certified Conductor of record will ensure:

- Correct lineup with associated switches
- Derails are placed in a non-derailing position for the prescribed route
- No blue flag / signals are displayed on entering track
- Train is properly yarded and secured

Only Certified Conductors are allowed to protect shove movements on the mainline. If the Assistant Conductor is not a Certified Conductor, the Conductor of record will protect all shove movements and secure train in accordance with both CFR 218 and securing cars or engines rules.

Reverse Movements will be made in accordance with rule 6.4.

Speed When Shoving Add New Fourth Bullet:

- Maximum timetable speed for passenger trains operated from the control car cab.

6.13 YARD LIMITS Add New Fifth Paragraph:

Track cars must be authorized by track permit.

6.13.1 CONDITIONAL YARD LIMITS Add New Rule:

Conditional Yard Limits, designated by Conditional Yard Limit signs, may be established on specified main track(s) between designated points:

- By track bulletin or general order for hours and/or days indicated using the following format:

"Conditional Yard Limits are in effect on the (Name) Sub District between MP ____ (or Location) and

SYSTEM SPECIAL INSTRUCTIONS

MP ____ (or Location) on (Track or Tracks) from (Time and Date) until (Time and Date).”
or

- Verbally by the train dispatcher in an emergency, when authorized by the Director - Operations, using the following words to notify each movement before it enters the Conditional Yard Limits:

Conditional Yard Limits are in effect on the (Name) Sub District between MP ____ (or Location) and MP ____ (or Location) on(Track).

The notification must be repeated to and confirmed by the train dispatcher with “That is correct.”

All movements within Conditional Yard Limits must be made in accordance with the provisions of Rule 6.13 (Yard Limits) and movements must not be made against the current of traffic unless authorized by the train dispatcher, who must first insure that no opposing movements have been authorized.

6.14 RESTRICTED LIMITS

Rule Does Not Apply on Metra Operated Districts.

6.15 BLOCK REGISTER TERRITORY

Rule Does Not Apply on Metra Operated Districts.

6.19 FLAG PROTECTION Add, Change and Delete:

Add New Last Paragraph with Bullets to Item A:

In accordance with Item A 3, flag protection is not required against following trains on the same track if:

- The train is within ABS limits and the rear of the train is protected by one block signal and following trains are required by rule or special instructions to approach that signal at restricted speed.
- Rear of the train is within CBS limits.
- or
- Train is moving against the current of traffic.

Change First Paragraph of Item B 3:

When a train stops on a main track, a flagman must immediately go back at least 1 mile where the maximum authorized speed is over 35 MPH or 2 miles where the maximum authorized speed is 35 MPH or less, display a lighted fusee, and remain there until stopping a following train or until recalled.

6.21.3 TRACK OBSTRUCTION / UNUSUAL CONDITION Change Last Sentence:

Within the specified limits, train must proceed prepared to stop within the range of vision short of obstruction or unsafe condition.

6.21.4 FLASH FLOOD WARNINGS Add New Rule:

When trains are advised by the train dispatcher or control operator that a flash flood warning is in effect, trains must approach locations indicated in Sub District special instructions at restricted speed unless a different speed is specified by bridge watchman.

The restriction remains in effect until the train dispatcher or control operator is notified by Engineering Department representative that no flooding exists.

6.21.5 SEVERE WEATHER WARNINGS Add New Rule:

When a SEVERE WEATHER WARNING, other than a FLASH FLOOD WARNING, is received the train dispatcher will:

SYSTEM SPECIAL INSTRUCTIONS

1. Notify all trains within or closely approaching the approximate warning area(s) of the severe weather warning information.
2. Discuss field weather conditions with each affected train.
3. Based on ascertained field weather conditions, instruct trains to:
 - Proceed at maximum authorized speed.
 - Proceed prepared to stop within the range of vision short of obstruction or unsafe condition not exceeding 25 MPH.
or
 - Stop train movement(s).

Trains may also be instructed to have upper level passengers move to the lower level of the cars.

Passengers on a train stopped at a passenger station wishing to leave the train at that station will be allowed to detrain.

4. Notify Engineering Department and other employees known to be outside within or closely approaching the approximate warning area(s) of the severe weather warning information, including severe thunderstorms, take shelter.

The train dispatcher may authorize train(s) that has been stopped to proceed prepared to stop within the range of vision short of obstruction or unsafe condition not exceeding 25 MPH after determining:

- SEVERE WEATHER WARNING is cancelled.
- Weather within the area is clearing as determined from crew(s) on stopped train(s).
- Senior Manager Train Operations, Chief Dispatcher or Assistant Chief Dispatcher allows movement to continue.

The train dispatcher may authorize train(s) to resume maximum authorized speed after field reports that the track is clear are verified by a track inspector or Engineering Department supervisor.

Trains and employees notified of a SEVERE WEATHER WARNING must keep the train dispatcher advised of conditions at their location and when the weather within the area is clearing.

6.25 MOVEMENT AGAINST THE CURRENT OF TRAFFIC Add New Third Paragraph:

Movements must approach facing point hand-operated switches prepared to stop unless switch is properly lined.

6.29.3 OVERHEATED BEARING OR WHEEL INSPECTION PROCEDURES Add New Rule:

Follow these procedures when overheated equipment such as hot bearings (hot boxes) or hot wheels are reported:


A. Testing Bearing Temperature

Use a heat indicating crayon to test bearing temperature. Dual-temperature crayons are located in the emergency tool compartment of cab control cars on diesel operated Districts and odd numbered highliner cars on Metra Electric District.


- When the ambient temperature is 32 degrees Fahrenheit or above, use the 200-degree Fahrenheit heat indicating crayon to test the bearing temperature.
- When the ambient temperature is below 32 degrees Fahrenheit, use the 163-degree Fahrenheit heat indicating crayon to test the bearing temperature.

SYSTEM SPECIAL INSTRUCTIONS

Test the bearing temperature by stroking the heat indicating crayon on the suspected bearing at the locations shown in the following illustrations:

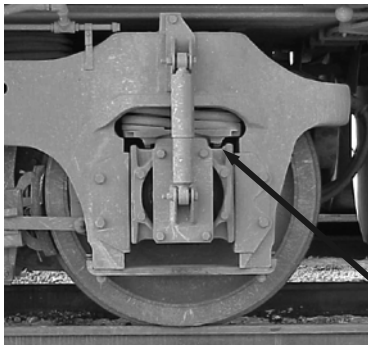

Locomotive Bearing

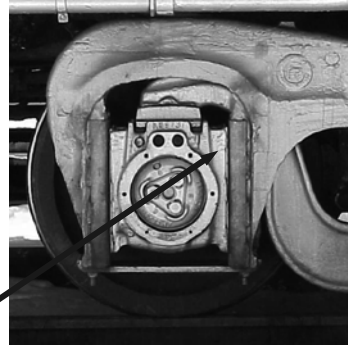

Bi Level Bearing

Stroke the heat
indicating crayon
here.

1200 or 1300 Series
Highliner Bearing



Stroke the heat
indicating crayon
here.

The crayon will melt leaving a liquid smear on an overheated bearing. If the crayon melts per instructions on the crayon, move the train to the nearest station at 5 MPH and discharge passengers. Train may then be moved to the nearest repair point at 5 MPH.

B. Checking Wheel Temperature

Look for sticking brakes on all wheels of the suspected car. Obvious signs of overheating include the presence of heat and/or discoloration of the wheel.

If no overheating is found after checking the suspected car, inspect 1 car ahead and 1 car behind the suspected car. If no overheating is found after inspecting the cars ahead and behind the suspected car, the train may proceed at maximum authorized speed. The crew must closely observe the train until it reaches the next point where Mechanical Department personnel are available to inspect the car(s) and authorize further movement. Notify the train dispatcher and the Mechanical Department all details after making inspection.

6.30 RECEIVING OR DISCHARGING PASSENGERS Change Entire Rule:

A. When a passenger train is receiving or discharging traffic, except at downtown Chicago terminals or stations with high level platforms, the following will apply:

- Another passenger train, on an adjacent track, must not enter the station until the stopped train has departed, cleared the platform area and the platform area can be plainly seen. The train dispatcher may authorize another passenger train to enter the station on an adjacent track in cases of mechanical breakdowns, emergencies or other unusual conditions.

SYSTEM SPECIAL INSTRUCTIONS

- Train, engine or on-track equipment must not pass between the standing train and the station platform being used. A passenger train that will make a station stop that will result in receiving or discharging passengers across a main track or controlled siding intervening between the train and the station platform must make this radio announcement:

(Train) approaching (Station) will be making passenger stop on (Track).

The train must also make a radio announcement to advise other movements when it has left the station stop.

- Train, engine or on-track equipment approaching on an adjacent track must not pass the rear end of the standing train unless one of the following safeguards is established:
 - Intertrack fencing is provided and affected pedestrian crosswalks are blocked.
 - or
 - Affected pedestrian crosswalks are blocked and a crew member is stationed at the rear of the stopped passenger train to prevent pedestrians from crossing.
 - A passenger train must not depart a station when a train or engine is seen approaching until the leading end of approaching train has passed the rear of standing train, unless communication has been established to ensure safeguards.
 - At initial stations where trains are staged near pedestrian crosswalks, crew members must be in a position to protect passengers against approaching movements on adjacent tracks.
 - Trains or engines on an adjacent track must ring bell approaching and passing a passenger train at a station and sound whistle as necessary.
 - Engineers must not report that their train is leaving, about to leave or has left a station until the entire train has completely cleared the station platform.
- B. Car stop signs displaying numbers corresponding to the number of cars in the train are installed at accessible stations served by lift equipped trains. Trains making passenger stop must stop at appropriate car stop sign to insure that doors of the lift equipped car are properly positioned at the accessible boarding area on the station platform.
- C. Crew members must protect passengers when they are handled at any point other than the station platform until they reach a point of safety.

6.30.1 OCCUPYING PLATFORMS ON SAME TRACK AT INTERMEDIATE STATIONS Add New Rule:

Before occupying platforms at intermediate stations on the same track where other trains are receiving or discharging passengers:

- Following train may occupy the same platform behind standing train, after making a safety stop fifty feet from standing train.
- Following train must not leave until the preceding train has cleared the platform.

6.32.1 PROVIDING WARNING OVER ROAD CROSSINGS Change first paragraph:

When cars are shoved, kicked or a gravity switch move is made over road crossings at grade, including yard access crossings, an employee must be on the ground at the crossing to provide warning until crossing is occupied. Make any movement over the crossing only on the employee's signal.

SYSTEM SPECIAL INSTRUCTIONS

6.32.2 Crossing Warning Devices (Highway / Pathway – Rail Grade Crossing) Add New Item B and Change C to read:

B. Automatic Warning Device Malfunction Message

The Conductor and Engineer must have copies of the Automatic Warning Device Malfunction Message form for each Sub District on which they will operate and must complete the "To" and "Date" lines prior to departure.

When notified that automatic warning devices are malfunctioning, copy the issued Bulletin Number on the appropriate line. Mark Box(es) and Item(s) for the Line(s) on the form as instructed and be governed by the preprinted instructions for the Item(s) marked.

Instructions must be repeated to and confirmed by the transmitting employee with "That is Correct", their initials, and the time. When confirmed by the transmitting employee mark the transmitting employee's initials and time in the "That is Correct" Box(es).

The Automatic Warning Device Malfunction Message may not be copied by the employee at the controls of a moving engine. Restrictions remain in effect on subsequent trips unless voided.

ITEM 1 - DEVICES HAVE ACTIVATION FAILURE OR ARE DISABLED. Stop before fouling the crossing. After a crew member is on the ground at the crossing to warn traffic, proceed over the crossing as directed by that crew member. Then proceed at normal speed.

ITEM 2 - DEVICES ARE MALFUNCTIONING OR EQUIPPED FLAGGER IS PRESENT PROVIDING WARNING FOR ONE DIRECTION OF APPROACHING TRAFFIC. Proceed over the crossing not exceeding 15mph without stopping until head end of train completely occupies the crossing, then proceed at normal speed.

ITEM 3 - Automatic Warning Device Malfunction Messages / Bulletins

Item No. 3 Automatic Warning Device Malfunction Messages will be issued when equipped flaggers are present providing warning for all directions of approaching traffic; or crossing devices are out of service and the crossing is barricaded. Trains that receive an Item No. 3 may proceed over the crossing at normal speed without stopping.

Item No. 3 Automatic Warning Device Malfunction Messages will be issued as a Track Bulletin on the Daily Operating Bulletin.

C. FLAGGERS Delete Bullet Points:

An equipped flagger is a person at a crossing, other than a crew member, who is equipped with a vest, shirt, or jacket of a high visibility color appropriate for daytime flagging such as orange, yellow, strong yellow green or fluorescent versions of these colors. At night, similar outside garments must be retro reflective. The flagger must have a red flag or stop paddle by day and a light at night.

7.3.1 PASSENGER YARD PROCEDURES Add New Rule:

Employees riding side of a locomotive or car in a passenger yard must:

- Stop short of off-track Mechanical Department equipment in close proximity to track(s).
- Dismount from movement.
- Determine off-track Mechanical Department equipment will clear movement.
- Board leading end of movement after it has passed the off-track Mechanical Department equipment and stopped.

SYSTEM SPECIAL INSTRUCTIONS

7.4 PRECAUTIONS FOR COUPLING OR MOVING CARS OR ENGINES Add and Change:

Add New Third Paragraph:

Before coupling to or moving cars or engines, verify that the cars are properly secured and can be coupled to and moved safely.

Change Fourth Paragraph:

Make couplings at a speed of not more than 2 MPH. Stretch the slack to ensure all couplings are made. After the initial stretch, place the throttle in idle for 2 seconds and stretch the slack a second time to ensure that pins have dropped and knuckles are locked. Make a visual inspection to ensure pins have dropped.

7.5 TESTING HAND BRAKES Add New Last Paragraph:

To ensure an adequate number of hand brakes are applied, release all air brakes and or cause slack to adjust. It must be apparent when slack runs in or out that hand brakes are sufficient to prevent cut of cars from moving. This must be done before uncoupling or before leaving equipment unattended.

7.6 SECURING CARS OR ENGINES Add New General Requirements for Application of Hand Brakes

When leaving railroad equipment, the MINIMUM number of hand brakes must be applied as indicated in the following table unless otherwise noted in Sub District instructions:

1 – 13 Cars	1 Hand Brake
14 – 23 Cars	2 Hand Brakes
24 – 33 Cars	3 Hand Brakes

When a locomotive is coupled to equipment, the locomotive hand brake must be applied. It is acceptable to include the hand brakes that are applied on the locomotive(s) in order to satisfy the requirements in the table.

On Metra Electric District MU cars, the parking brake is the hand brake. If the hand brake/parking brake is defective, the appropriate number of wheels must be blocked as indicated in the table.

Additional hand brakes may be required depending on the following variables:

- Total number of cars.
- Whether cars are loaded or empty.
- Track grade.
- Hand brake force applied.
- Weather conditions.

It must be kept in mind that there may be situations where all hand brakes must be applied when securing equipment.

Locomotive left unattended must be secured in accordance with Metra Safety Rules 135.13.5 Working on Cars and Locomotives (Leaving Locomotive Unattended) and 137.12 General Locomotive Instructions (Leaving Locomotives Unattended).

7.9 SWITCHING PASSENGER / MU HIGHLINER OR OCCUPIED OUTFIT CARS Change and Add:

Change Rule Title.

Add New Third Paragraph with Bullet Points and New Fourth and Fifth Paragraphs:

When coupling MU highliner cars:

- Stop the movement approximately 50 feet before the coupling is made.
- Have an employee on the ground direct the coupling or make coupling visually from MU highliner control cab.

SYSTEM SPECIAL INSTRUCTIONS

Make couplings at a speed sufficient to activate the couplers but not more than 2 MPH.

Employees occupying passenger equipment when a coupling is expected must be seated and braced until after the coupling is completed or must exit the equipment before the coupling is made. Except when necessary in the performance of duties, employees must not walk through equipment when a coupling is expected.

8.3.1 RELEASING AUTHORITY IN NON-SIGNALED TERRITORY Add New Rule:

In non-sigaled territory, when a hand-operated switch is used to clear the main track, except where Rule 6.13 (Yard Limits) is in effect, before releasing authority and leaving the location of the switch:

- Employees must confirm the position of the switch in accordance with Rule 8.3 (Main Track Switches).
- Advise the train dispatcher of the position of the switch and that the switch is locked.

8.15 SWITCHES RUN THROUGH Change First Sentence to Read:

Do not run through switches, other than spring switches.

8.18 VARIABLE SWITCHES Change Entire Rule:

Trailing point movements must not be made through a variable switch until it has been lined by hand for movement.

8.21 DOUBLE CHECKING SWITCH OR DERAIL POSITION Add New Rule:

During switching operations when shoving or backing a train, engine, or on-track equipment:

- The employee directing the movement must advise the employee at the controls the track name or number and confirm all switches and derails are properly lined for the intended route.
- The employee at the controls must repeat this information and require the employee directing the movement to "double check" the position of switches and derails.

Movement must not begin until confirmation is received from the employee directing the movement that the position of switches and derails has been "Double Checked".

9.1 SIGNAL ASPECTS AND INDICATIONS Add New Last Paragraph:

Block or interlocking signals which govern the approach to interlockings or control points are identified by 2 orange retro-reflective stripes.

9.2.1 VIEW OF SIGNALS Add New Rule:

When a train stops in close proximity, short of an absolute signal be governed as follows:

- If the employee at the controls cannot observe the signal, a crew member must not give a signal to proceed unless the signal displays a proceed indication and that indication is verbally communicated to the employee at the controls.
- At passenger stops indicated in Sub District Special Instructions, unless the crew member operating the doors can observe that the signal displays a proceed indication, they must not close the doors or give a signal to proceed until there is verbal communication with the employee at the controls confirming the indication displayed by the signal.

9.5 WHERE STOP MUST BE MADE Change Third Bullet Point to Read:

- Report it to and be governed by instructions of the train dispatcher.

9.5.4 AUTHORITY TO PROCEED Add New Last Paragraph:

Control operators must not authorize track cars through interlockings or control points on signal indication.

SYSTEM SPECIAL INSTRUCTIONS

9.8 NEXT GOVERNING SIGNAL Add:

Except in Cab Signal Territory or when operating in PTC territory with PTC cut in and active, the next governing signal must display the following indication before train speed can be increased or maintained above 40 MPH:

- Rule 9.1.5 Clear
- Rule 9.1.6 Advance Approach
- Rule 9.1.7 Approach Diverging
or
- Rule 9.1.8 Diverging Advance Approach

9.9 TRAIN DELAYED WITHIN A BLOCK Add New Item D:

D. ABS/CBS/CTC

When a passenger train makes a scheduled station stop(s) or its speed is reduced below 10 MPH in a block preceding an absolute signal of an interlocking or control point:

- Unless otherwise restricted, the train will proceed prepared to stop short of next signal not exceeding 40 MPH.
- Speed must not be increased until the next signal is visible and indicates proceed.

These requirements do not apply in territories where:

- Maximum authorized speed does not exceed 30 MPH.
- Automatic Cab Signal System (ACS) is in effect.
or
- When operating in PTC territory with PTC cut in and active

Orange signs with black lettering reading "DEPARTING PASSENGER TRAINS PROCEED PREPARED TO STOP AT NEXT SIGNAL NOT EXCEEDING 40 MPH" will be displayed at the end of each station platform that is located between the approach and absolute signals of interlockings and control points where the absolute signals cannot be seen.

When a passenger train makes a scheduled station stop(s) in a block preceding an intermediate number-plate signal, the train is not considered delayed.

9.12 STOP INDICATIONS Add New First Paragraph:

When a train is stopped at any signal displaying a Stop indication and is unable to contact the control operator, a crew member must immediately contact the train dispatcher.

9.12.5 CBS TERRITORY Add New Rule:

At a signal displaying a Stop indication, if no conflicting movement is evident, the train will be governed as follows:

- A crew member must immediately contact the control operator.
- Before authorizing the train to proceed, the control operator must know that the route is properly lined and no conflicting movement is occupying or authorized to enter the track between that signal and the next absolute signal governing movement or the end of CBS where applicable.
- When the train receives these instructions, *After stopping, (train) at (location) has authority to pass signal displaying Stop indication*, specifying route where applicable, the train must move at restricted speed.

SYSTEM SPECIAL INSTRUCTIONS

9.14.2 CONTROLLED BLOCK SYSTEM (CBS) Add New Rule:

On designated tracks specified in the timetable, train movements will be authorized by a controlled signal indication or verbal authority from the control operator. The control operator must verify that conflicting movements are protected before giving authority. The authority will establish the current of traffic on tracks designated for movement in both directions.

A train must not enter or occupy any track within CBS limits unless:

- A governing signal displays a proceed indication.
or
- Verbal authority is granted.

Waiting 5 minutes in accordance with Rule 9.17 (Entering Signaled Track at Hand-Operated or Spring Switch) is not required within CBS limits.

Movement must proceed only in the direction authorized unless authority is granted to move in both directions in accordance with Rule 9.15 (Track Permits). A reverse movement may be made within the block occupied.

A movement that clears any track within CBS limits must not re-enter that track without new authority unless the switch is left open.

9.15 TRACK PERMITS Change Entire Rule:

On tracks designated in the timetable, a track permit will authorize:

- Trains to occupy the main track or tracks between specific points.
- Trains to move against the current of traffic outside yard limits.
or
- Track cars or employees to occupy the main track or tracks outside CTC or interlocking limits.

The track permit must be issued by a designated control operator under the direction of the train dispatcher. Within the limits, movements may be made only in the direction(s) specified.

A train must obtain authority to pass a controlled signal displaying Stop indication to enter track permit limits. Within track permit limits a train, after stopping, may pass a signal displaying Stop indication at restricted speed without further authority, except when signal governs movement at an interlocking.

Track permit Box 5 can be issued in any main track territory to convey information concerning:

- Track bulletins in effect when trains are not required or are unable to secure a Daily Operating Bulletin.
or
- Unforeseen track restrictions.

Speed restriction information will be conveyed using Daily Operating Blank Bulletin Messages.

The provisions of Rule 9.15.1 (Issuing Track Permits) and Rule 9.15.2 (Clearing Track Permits) do not apply to a track permit issued only to convey information concerning track bulletins or track restrictions which does not grant authority.

SYSTEM SPECIAL INSTRUCTIONS

9.15.1 ISSUING TRACK PERMITS

Change last paragraph 1st sentence to read:

Before a joint track permit is issued to trains with machines, track cars or employees, the employee in charge of the machines, track cars, or employees must grant permission.

9.15.1 ISSUING TRACK PERMITS Add:

Add Following the Third Bullet of the Second Paragraph:

When a track permit is issued to authorize a train to occupy the main track or tracks between specific points or to move against the current of traffic outside yard limits:

- Opposing signals protecting the limits must be set to display Stop indications.
- Blocking or marking devices must be applied to the control machine.

The body of a track permit may be verbally transmitted to, copied by and repeated by the requesting employee in advance; before the limits are clear, required signals protecting the limits are set to display Stop indications and blocking or marking devices are applied to the control machine. Before the track permit acknowledgement is transmitted:

1. Required signals protecting the limits must be set to display Stop indications.
2. Blocking or marking devices must be applied to the control machine.
3. The requesting employee must be advised and acknowledge that blocking or marking devices have been applied to the control machine.
4. The requesting employee must repeat the previously issued body of the authority to the train dispatcher or control operator.

Add New Third and Fourth Paragraphs under Heading “More than One Track Permit”:

Before a joint track permit is issued to trains with machines, track cars or employees, the employee in charge of the machines, track cars or employees must grant permission. When a joint track permit is issued to trains with machines, track cars or employees, trains must not enter the limits unless instructed by the employee in charge of the machines, track cars or employees and that employee directs all movements.

When a joint track permit is issued to trains with other trains, contact between trains is not required.

9.16 STOP AND PROCEED INDICATION

Rule Does Not Apply on Metra Operated Districts.

10.3 TRACK AND TIME Add New Third and Fourth Paragraphs to Item C:

Upon request, the holder of track and time may release a portion of the original track and time limits to the control operator. The holder must be clear of the portion of the limits being released before releasing that portion of the authority. The control operator will convey the change to the holder using the following words:

Track and time (number) now reads between (location) and (location).

The holder must not re-enter the released portion unless new track and time authority is granted.

10.3.1 PROTECTION OF LIMITS Add Following Item 4:

The body of a track and time may be verbally transmitted to, copied by and repeated by the requesting employee in advance; before the limits are clear, signals protecting the limits are set to display Stop indications and blocking or marking devices are applied to the control machine. Before the track and time “OK” time is transmitted:

SYSTEM SPECIAL INSTRUCTIONS

1. Signals protecting the limits must be set to display Stop indications.
2. Blocking or marking devices must be applied to the control machine.
3. The requesting employee must be advised and acknowledge that blocking or marking devices have been applied to the control machine.
4. The requesting employee must repeat the previously issued body of the authority to the train dispatcher or control operator.

10.3.3 JOINT TRACK AND TIME Add New Second and Third Paragraphs:

Joint track and time must not be issued to trains with machines, track cars or employees unless the employee in charge of the machines, track cars or employees grants permission. When joint track and time is granted to trains with machines, track cars or employees; trains must not enter the limits unless instructed by the employee in charge of the machines, track cars or employees and that employee directs all movements.

When joint track and time is granted to trains with other trains, contact between trains is not required.

10.3.4 TRACK AND TIME ACKNOWLEDGMENT Change First Paragraph:

Track and time authority must be recorded and repeated to the control operator. The control operator will check the repeated information and, if correct, will say "OK" and give the time and his name. The employee will record the "OK" time and the control operator's name on the track and time form and repeat them to the control operator. Track and time authority is not in effect until the "OK" time has been recorded, repeated and acknowledged.

12.0 RULES APPLICABLE ONLY IN AUTOMATIC TRAIN STOP SYSTEM (ATS) TERRITORY

Entire Chapter Does Not Apply on Metra Operated Districts.

14.0 RULES APPLICABLE ONLY WITHIN TRACK WARRANT CONTROL (TWC) LIMITS

Entire Chapter Does Not Apply on Metra Operated Districts.

15.0 TRACK BULLETIN RULES

TRACK BULLETIN FORMS:

Form A - Temporary speed restrictions In Effect.

Form B - Protection of men and equipment fouling a main track or tracks designated in Special Instructions.

Form C - Sounding whistle signal 5.8.2(8) and ring engine bell through the limits during the time specified.

Form D - May be used to remove a main track from service or to provide other information affecting train movements or safety.

Track bulletins will be numbered with the following numbers:

Track Bulletins will be numbered consecutively beginning with the following numbers: New Table

<u>Metra Electric District</u>	<u>Track Bulletin</u>	<u>General Information</u>	<u>DC Bulletin</u>
University Park Sub	1200 – 1299	9200-9299	8200-8299
South Chicago Sub	3500 – 3599	9500-9599	8500-8599
Blue Island Sub	5400 – 5499	9400-9499	8400-8499

SYSTEM SPECIAL INSTRUCTIONS

<u>Rock Island District</u>	<u>Track Bulletin</u>	<u>General Information</u>
Joliet Sub	1500 – 1599	9500 - 9599
Beverly Sub	1600 – 1699	9600 - 9699

<u>Southwest District</u>	<u>Track Bulletin</u>	<u>General Information</u>
Southwest Sub	4500 – 4599	9400-9499

15.1 – Track Bulletins under “Receipt and Comparison of Track Bulletins add new paragraphs:

Daily Operating Bulletin (DOB)

All Trains and Employee in Charge must have a DOB in their possession unless authorized by the train dispatcher.

Daily Operating Bulletin limits (DOB) are designated in the System Special Instructions. A DOB will take effect at 0401 and remain in effect for 24 hours unless made void by the train dispatcher. A DOB will not be used to grant authorization on a Main Track.

At their initial station, unless otherwise instructed by the train dispatcher or special instructions, all crew members must receive a Daily Operating Bulletin with track bulletins effecting their train's movement.

The Conductor, Engineer or Employee in Charge (EIC), upon reporting for work at the designated point, will request a Daily Operating Bulletin (DOB) and Track Bulletins from the appropriate Train Dispatcher unless otherwise provided. After receiving DOB and track bulletins, crew members must check them to determine that they are legible and complete. Trains or Employee in Charge (EIC) must verify that they have the most current DOB.

In the event that the fax machine or other delivery method fails to function as intended, the conductor, engineer or EIC must communicate with the appropriate Train Dispatcher and be governed by instructions received.

BULLETIN EXCEPTIONS:

Bulletin Exceptions are Track Bulletins that are issued separately from those that are contained on a Daily Operating Bulletin.

Bulletin Exceptions are:

- Issued/voided verbally by the Dispatcher or Control Operator
- Copied by train crews or MOW employees on the blank bulletin messages page of the DOB, or the Automatic Warning Device Malfunction form

Bulletin Exceptions may be issued in the form of:

- Track Bulletin Form A, B, C, and D
- Automatic Warning Device Malfunction
- General Information
- or
- DC Bulletins

SYSTEM SPECIAL INSTRUCTIONS

For PTC Active trains:

Crews must not copy a Bulletin Exception until the PTC system has been Initialized and is in the Active or Disengaged state.

Dispatchers must not issue a Bulletin Exception to PTC trains until they are in the Active or Disengaged state.

Daily Operating Bulletin Limits on Metra Subdivisions

Metra Electric District University Park Sub between	MP 0.0 and MP 31.50
Metra Electric District South Chicago Sub between	MP 8.57 and MP 13.13
Metra Electric District Blue Island Sub between	MP 14.49 and MP 18.95
Rock Island Joliet District Sub between	MP 0.0 and MP 40.6
Rock Island District Beverly Sub between	MP 10.12 and MP 16.6
Southwest Sub District Sub between	MP 1.7 and MP 40.7

15.2 PROTECTION BY TRACK BULLETIN FORM B: Change Format to Establish Communication with the Train following Second Paragraph:

Foreman (or Flagman) in charge of Track Bulletin No. _____ line No. _____ between MP _____ and MP _____ (specifying Sub District where necessary).

Change First Bullet of Item A:

- (Train ID) may pass red flag (or orange working limits banner), at MP _____ (without stopping) and proceed at (one of the following) (specifying track when necessary).

Add New Paragraphs to Item A following Last Bullet:

If additional red flags (or orange working limits banners) are displayed within the limits, the train must be advised of the mile post location of all red flags (or orange working limits banners) before entering the limits.

Orange working limits banners will be displayed for all lines that indicate Flagman. Track Flags will be displayed for lines that indicate Foreman.

Verbal permission will be granted to on-track equipment in the same manner as trains.

15.3 AUTHORIZING MOVEMENT AGAINST THE CURRENT OF TRAFFIC

Rule Does Not Apply on Metra Operated Districts.

15.13 VOIDING TRACK BULLETINS Add New Last Paragraph:

Unless made void, each day's track bulletins are void at 4:01 AM the following day.

16.0 RULES APPLICABLE ONLY IN DIRECT TRAFFIC CONTROL (DTC) LIMITS

Entire Chapter Does Not Apply on Metra Operated Districts.

17.0 RULES APPLICABLE ONLY IN AUTOMATIC TRAIN CONTROL (ATC) TERRITORY

Entire Chapter Does Not Apply on Metra Operated Districts.

SYSTEM SPECIAL INSTRUCTIONS

18.0 RULES APPLICABLE ONLY IN POSITIVE TRAIN CONTROL TERRITORY (PTC ACTIVE TRAINS)

18.1 Positive Train Control Territory Add Last Sentence:

PTC territory is specified in special instructions. A train must not be operated in PTC territory if the controlling locomotive is not equipped with an operable PTC system unless otherwise authorized by rule, special instructions, or the train dispatcher. Only PTC qualified operating employees are authorized to operate PTC enabled equipment within PTC territory.

18.2 Taking Charge of PTC Equipped Change rule to read:

When taking charge of a train in PTC territory, or before entering PTC territory, the train must not depart until the engineer confirms:

1. The PTC circuit breaker and cut out switches are in the cut in position.
 - If a PTC circuit breaker or cut out switch is found in the off position, notify the train Dispatcher for instructions.
 - Crews are prohibited from turning off PTC circuit breakers unless authorized by the train Dispatcher.
2. The PTC system on the controlling locomotive is initialized.
 - If the system fails to initialize, notify the train dispatcher for instructions.
3. Departure test is performed at the train's initial terminal or when prompted by the PTC system.

When an engineer is relieved before a trip is completed, the PTC system must be logged off before the relieving engineer takes charge of the train.

18.3 Broken or Missing Seals

Unless authorized, do not break the protective seals on PTC devices. Report broken or missing PTC seals to the train dispatcher.

18.4 PTC Cut Out

The PTC system may only be cut out or disabled when authorized by rule or when authorization from the train dispatcher is received.

18.5 PTC Trip Completion

At the completion of the trip, the engineer must log out of PTC unless authorized by the dispatcher or special instructions.

18.6 Consist Data Changed to read:

The engineer must review consist data displayed by the PTC system and correct if necessary. The PTC consist data must be updated after any setouts or pickups. The engineer must confirm all consist data displayed by the PTC system is accurate.

18.7 Comparison of PTC Display Information

Before departing, crew members on the controlling locomotive must compare information such as track bulletins, restrictions, and authorities displayed on the PTC display with the copies in their possession.

The train dispatcher may deliver mandatory directives and restrictions verbally. When a crew member receives a mandatory directive or restriction, it must then be compared to the PTC display.

When the PTC display does not conform with a wayside or cab signal indication, maximum authorized speed, mandatory directive, timetable, or special instruction, be governed by the most restrictive.

Any discrepancies must be reported to the train dispatcher.

SYSTEM SPECIAL INSTRUCTIONS

18.8.1 PTC Enforcement Add rule:

If a train is stopped by PTC enforcement, the engineer must notify the train dispatcher and provide the following information:

- Identifying engine initials and number.
- Time and milepost location where the PTC enforcement was initiated.
- Reason for the PTC enforcement, if known.
- Milepost location of the head end of the train when stopped.
- The Engineer must also complete and submit a Trip Report Form with detailed information to the help desk upon completion of the trip on which the enforcement has occurred. Only one report per trip.

18.9 USE OF RESTRICTED MODE

Restricted mode must be turned on before performing work events such as switching, pickups, setouts, etc. After all work events have been completed, turn off restricted mode.

18.12 Train Dispatcher Notification

If any of the following conditions occur, the occurrence must be reported to the train dispatcher.

- Discrepancies between the PTC display, mandatory directives or wayside systems.
- Any time PTC system initiates braking enforcement.
- PTC is suspected of not providing warning as intended.
- Any unusual occurrence which may have attributed to a PTC issue.

When reporting an issue to the train dispatcher, include the following information:

- Train Identification Number
- Locomotive/Cab Car Number
- Time and location of occurrence

An Event Trip Report must be submitted to Metra's Technical Assistant Center
As soon as possible after the end of the affected trip.

18.13 Operative Brake Count

The PTC system must remain in the CUT-OUT operating state while on PTC enabled track if more than 5% of the train's air brakes are inoperative.

Note: If one or more trucks are cut-out on a train with less than 10 units, the PTC system must remain in the cut-out state while operating. (* SRGP 138.19 Appendix B Movement of Equipment with Power Brake Defects)

* SRGP - Safety Rules & General Procedures

20.0 ADDITIONAL RULES AND INSTRUCTIONS Add:

20.1 CLEARANCE AND WEIGHT RESTRICTIONS

All cars or equipment, with or without loads, including loaded double stack cars that exceed clearance and weight restrictions shown in Sub District Special Instructions or any load contained on a car longer than 54 ft. 6 in. so that the lading exceeds the width of the car or extends over the end sill(s) of the car; must not be moved on Metra tracks unless excessive load/weight clearance has been obtained from Metra Engineering Department.

SYSTEM SPECIAL INSTRUCTIONS

20.2 KEY TRAINS AND HAZARDOUS MATERIALS

Emergency Response Guidebooks are located:

- In the cab of all diesel locomotives.
- In the cab of all even numbered highliner cars.
- At each train dispatcher's work station.
- In all manned towers.

Trains containing the following minimum quantities of the materials specified shall not be left unattended on Metra Main Tracks or Sidings under any circumstances:

- Five or more tank car loads of any one or any combination of materials poisonous by inhalation as defined in 49 CFR 171.8, and including anhydrous ammonia (UN 1005) and ammonia solutions (UN 3318).
or
- 20 rail car loads or intermodal portable tank loads of any one or any combination of materials listed above, or any Division 2.1 flammable gas, Class 3 flammable liquid or combustible liquid, Class 1.1 or 1.2 explosive, or hazardous substance listed in 49 CFR 173.31(f)(2).

Unattended means equipment left standing and unmanned in such a manner that the brake system, either hand or air brakes, may not be readily controlled by a crew member or qualified person.

Employees who in any way handle hazardous materials must have a copy of the instructions for handling these materials. Employees must be familiar with and comply with these instructions or regulations.

Before movement of trains containing such materials are authorized to occupy Metra tracks, the conductor, or other qualified employee, must notify the train dispatcher or control operator.

Any incident involving a potential release of hazardous material must be immediately reported to the train dispatcher or control operator. Extreme caution must be exercised to insure passengers and employees are not exposed to hazardous materials.

SYSTEM SPECIAL INSTRUCTIONS

MEDICAL SERVICES INFORMATION

MEDICAL DEPARTMENT

547 West Jackson Boulevard
12th Floor - East
Chicago, Illinois 60661

General Inquiries. 312 322-8901
Drug and Alcohol Program 312 322-4979
Leave Administration 312 322-8937 (Transportation, Police, Non-Contract,
all other depts.)
312 322- 7917 (Mechanical and Engineering depts.)

Medical Department Fax. 312 322-8968
FMLA/Medical Leave Email FMLAMetra@metrarr.com
On Duty Use of Medication Forms HRMedical@metrarr.com

Employee Assistance Program -
Provided by Morneau Shepell Associates. 800 272-2727

CHIEF MEDICAL OFFICER

Concentra
Presidential Towers
614 West Monroe Street - First Floor
Chicago, Illinois 60661

Telephone. 312 258-0700
Fax. 312 258-0705

All appointments, except Periodic Physical Examinations, are made by the Medical/Leave Administration Department.

MANDATORY PERIODIC PHYSICAL EXAMINATIONS

Certain employees in safety sensitive positions are required to take physical examinations at specified intervals. Employees due for examination will receive notification, by mail, from their District Director. The District Director and the Medical Department maintain records.

Schedule of Examinations:

Under Age 55:	Every Two Years	Every Five Years
Age 55 and Over	<u>Every Year</u>	<u>Every Three Years</u>
	Train Service Employees	Control Operators
	Engineers	Train Dispatchers
	Yardmasters	Tower Operator/Levermen
	Load Supervisors	GEB Tower Clerks

MEDICAL LEAVE OF ABSENCE DUE TO ILLNESS OR INJURY SUSTAINED OFF-DUTY

To request a leave, view the current policy, or find frequently asked questions, visit the Employee Portal using this link: <https://employee.metrarr.com/Department/human-resources/Page/medical-leave> or use the following instructions: Click on the 'Departments' tab, choose Human Resources, click 'Medical Leave' from the options on the left. A link to the FMLA/Medical Leave SharePoint request form is located there. Completed forms must be returned directly to the Medical Department via email at FMLAMetra@metrarr.com or fax at 312-322-8968.

SYSTEM SPECIAL INSTRUCTIONS

INJURY, ILLNESS, ACCIDENT AND INCIDENT REPORTING

The following reporting forms are used:

- Form F6180.98 (Rev. 5/11) - Railroad Employee Injury And/Or Illness Record
- Form F6180.107 (8/10) - Alternative Record for Illnesses Claimed To Be Work Related
- Form RC99052 (7/98) - Employee Incidental Injury / Illness Report
- Form RC4005 (Rev. 8/10) - Property Damage / Personal Injury / Illness Report
- Form F6180.54/57(Rev.5/13) - Rail Equipment Incident Report

Use the following table to determine reporting requirements:

REQUIRED FORMS TO USE WHEN REPORTING INJURIES, ILLNESSES, ACCIDENTS AND INCIDENTS


Form F6180.98 (Rev.5/11) Railroad Employee Injury And/Or Illness Record	Form F6180.107 (8/10) Alternative Record For Illnesses Claimed To Be Work-Related	Form RC99052 (7/98) Employee Incidental Injury/Illness Report	Form RC4005 (Rev.8/10) Property Damage/Personal Injury/Illness Report	Form RC 6180.54/57 (Rev.7/13) Rail Equipment Incident Report
Use when an employee injury REQUIRES medical attention. This form MUST be filled out prior to the end of the tour of duty. A Company Officer MUST be notified prior to going off duty.	Use when an employee claims an illness that may be work-related.	Use for Minor employee injury that DOES NOT REQUIRE medical attention. This form must be filled out prior to the end of tour of duty. It also MUST be filled out in conjunction with a Company Officer.	Use for All non-employee incident. DO NOT USE for employee injuries. Examples of use: • Passenger slipping on platform. • Passenger falling / injured on-board train. or • Striking trespasser on right of way. *ONLY ONE CREW MEMBER MUST FILL OUT A REPORT.	Use for Any rail grade equipment incident resulting in damage to equipment. Use Form RC4005 to complete necessary information when required. EACH CREW MEMBER MUST FILL OUT A SEPARATE REPORT.
IMMEDIATE SUPERVISOR MUST BE CONTACTED IN ACCORDANCE WITH DISTRICT INSTRUCTIONS				

TREATMENT OTHER THAN EMERGENCY

The Authorization Form will be forwarded to Concentra by the Medical Department following notification, from the employee's District, of an on-duty injury requiring medical treatment. This form authorizes Concentra to evaluate the injured employee.

SYSTEM SPECIAL INSTRUCTIONS

ROADWAY SIGNS, TRACK FLAGS, BANNERS AND MAIN TRACK SWITCH TARGETS

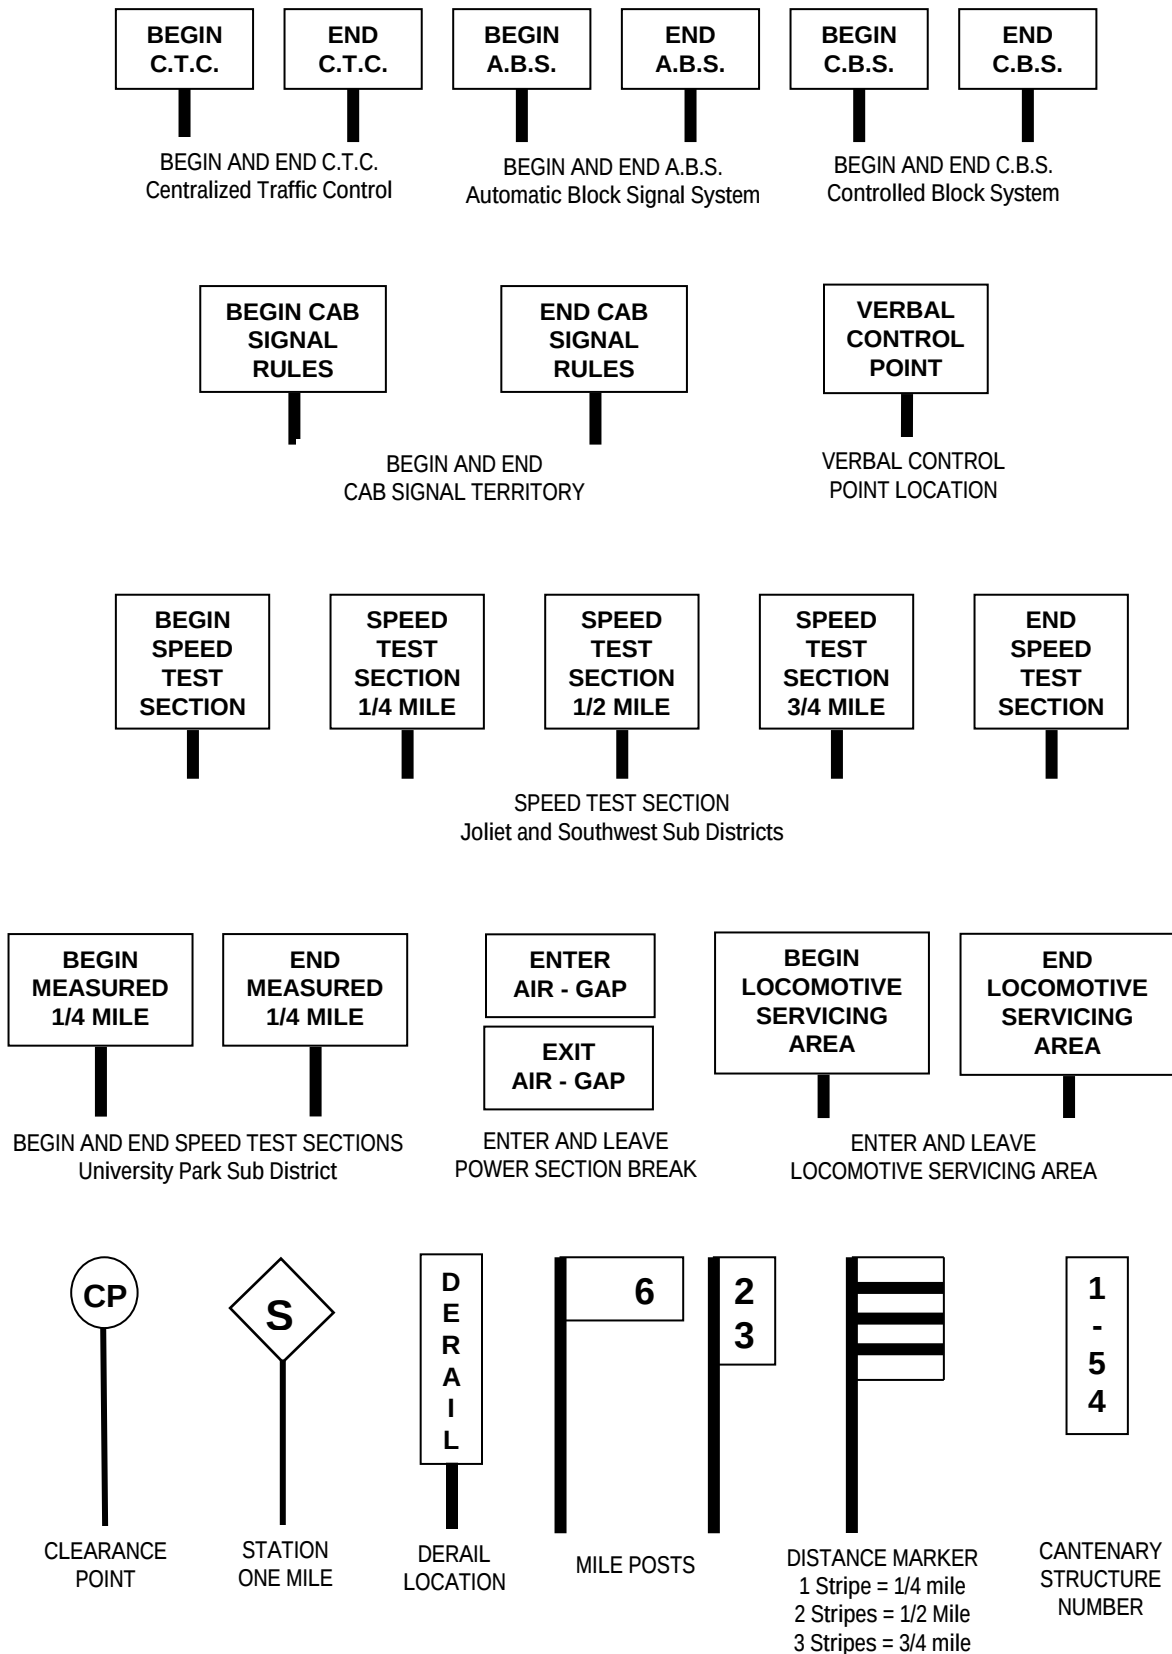


SYSTEM SPECIAL INSTRUCTIONS




LOW PROFILE TRACK FLAGS



FULL SIZE TRACK FLAGS








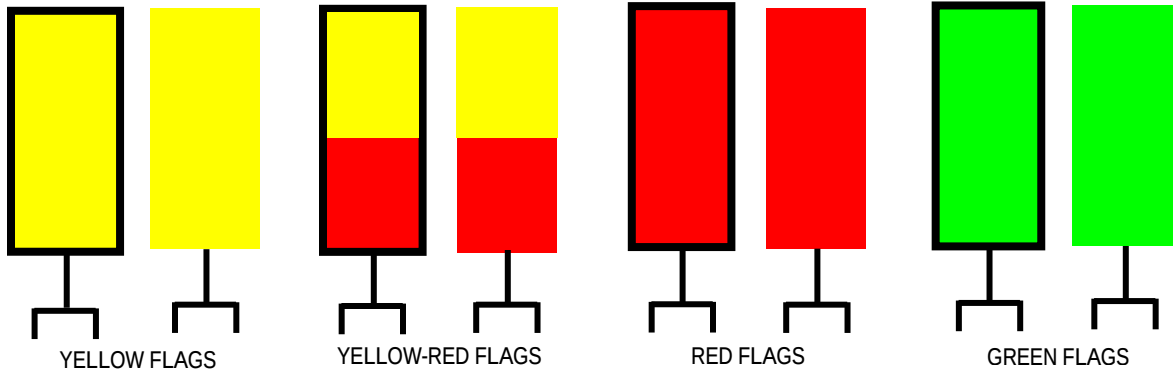


Where another railroad has main tracks adjacent to Metra main track(s), trains or on-track equipment operating on Metra main track(s) may encounter other styles of full size track flags. When other styles of full size track flags are displayed adjacent to Metra main track they will not apply to the Metra main track(s) on which the train or on-track equipment is moving.

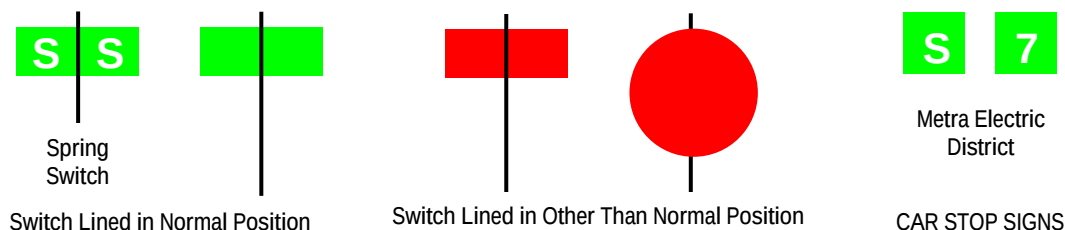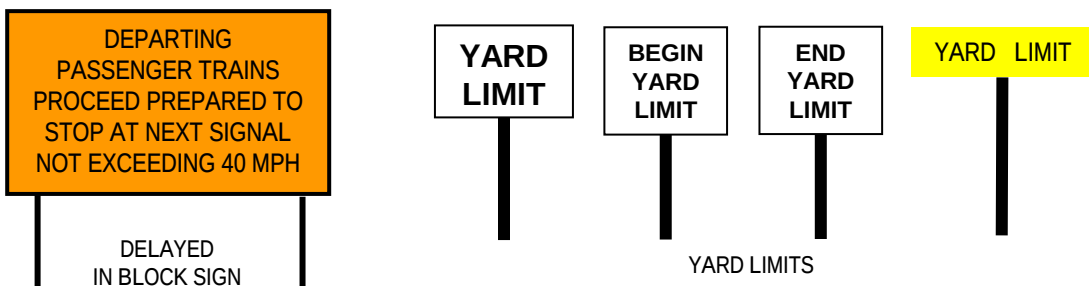
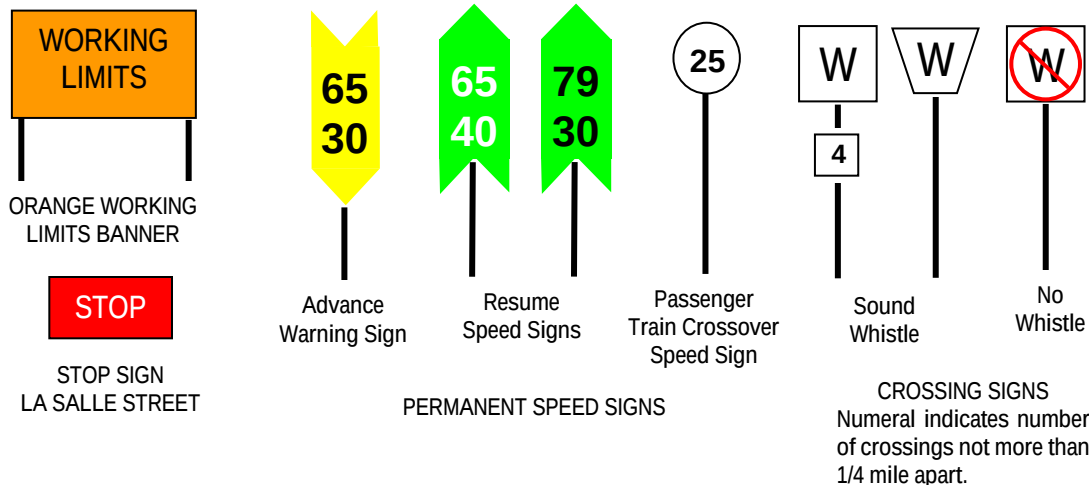


MAIN TRACK HAND-OPERATED AND SPRING SWITCH TARGETS

SYSTEM SPECIAL INSTRUCTIONS

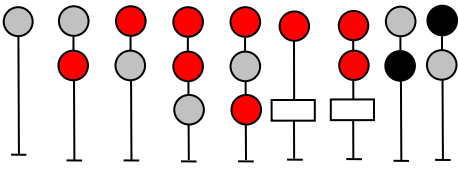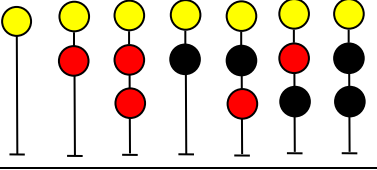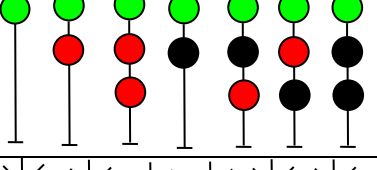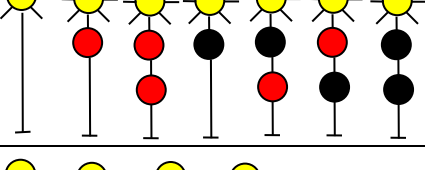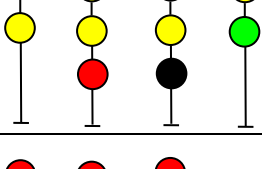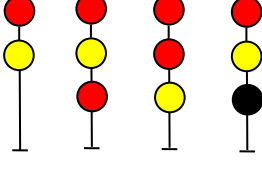BLOCK AND INTERLOCKING SIGNALS				
RULE	ASPECT	NAME	INDICATION	CAB SIGNAL ASPECT
9.1.1		STOP	STOP.	
9.1.2		RESTRICTING	PROCEED AT RESTRICTED SPEED.	
9.1.4		APPROACH	PROCEED PREPARED TO STOP AT NEXT SIGNAL, TRAINS EXCEEDING 40 MPH IMMEDIATELY REDUCE TO THAT SPEED.	
9.1.5		CLEAR	PROCEED.	
9.1.6		ADVANCE APPROACH	PROCEED PREPARED TO PASS NEXT SIGNAL NOT EXCEEDING 40 MPH AND PREPARED TO STOP AT THE SECOND SIGNAL.	
9.1.7		APPROACH DIVERGING	PROCEED PREPARED TO ADVANCE ON DIVERGING ROUTE AT THE NEXT SIGNAL AT PRESCRIBED SPEED THROUGH TURNOUT.	
9.1.8		DIVERGING ADVANCE APPROACH	PROCEED ON DIVERGING ROUTE, NOT EXCEEDING PRESCRIBED SPEED THROUGH TURNOUT PREPARED TO PASS NEXT SIGNAL NOT EXCEEDING 40 MPH AND PREPARED TO STOP AT THE SECOND SIGNAL.	
9.1.9		DIVERGING APPROACH	PROCEED ON DIVERGING ROUTE AT PRESCRIBED SPEED THROUGH TURNOUT, PREPARED TO STOP AT NEXT SIGNAL, TRAINS EXCEEDING 40 MPH IMMEDIATELY REDUCE TO THAT SPEED.	

SYSTEM SPECIAL INSTRUCTIONS

BLOCK AND INTERLOCKING SIGNALS Continued				
RULE	ASPECT	NAME	INDICATION	CAB SIGNAL ASPECT
9.1.10		DIVERGING CLEAR	PROCEED ON DIVERGING ROUTE AT PRESCRIBED SPEED THROUGH TURNOUT.	
9.1.11		DIVERGING APPROACH DIVERGING	PROCEED ON DIVERGING ROUTE AT PRESCRIBED SPEED THROUGH TURNOUT PREPARED TO ADVANCE ON DIVERGING ROUTE AT THE NEXT SIGNAL AT PRESCRIBED SPEED THROUGH TURNOUT.	
The following symbols are used in diagrams of signal aspects:  To indicate a number plate.  To indicate a flashing light.  To indicate a lunar aspect.  To indicate a dark aspect. Aspects shown in Rules 9.1.2 through 9.1.7 may be displayed on signals with or without a number plate on the signal mast. When signals display Rules 9.1.7 (Approach Diverging), 9.1.8 (Diverging Advance Approach), 9.1.9 (Diverging Approach), 9.1.10 (Diverging Clear) or 9.1.11 (Diverging Approach Diverging), the diverging route may include more than one turnout. Movement must be prepared to advance on diverging route at prescribed speed(s) through all turnouts.				

SPECIAL ASPECTS WHICH ARE NOT PART OF THE AUTOMATIC BLOCK, CTC AND INTERLOCKING SYSTEMS				
Name	Location	Rule	Aspect	Indication
Station Track Occupancy Indicator	La Salle Street Entrance to station tracks.	9.1.20	Lunar	Station track is not occupied.
		9.1.21	Red	Station track is occupied. Stop is not required.
Station Track Occupancy Indicator	Randolph Street Entrance to station tracks.	9.1.22	Yellow	Station track is not occupied.
		9.1.23	Red over Yellow	Station track is occupied.
		9.1.24	Red or Dark	Station track may be occupied. Stop is not required.
Route Indicator	Richton Yard North side of signal bungalow	9.1.27	One Lunar	Dual control switch is lined for yard track No. 1. Does not authorize train to proceed.
		9.1.28	Two Lunar	Dual control switch is lined for yard lead. Does not authorize train to proceed.
Gate Indicator	BI Sub Dist road crossings indicated in Sub Dist SI	9.1.29	Yellow	Crossing gates are fully lowered.
		9.1.30	Red	Crossing gates are in raised position. Comply with Rule 6.32.2.

Power On Lights - On the track side of signal bungalows and relay cases, there is a white light indicator that is continuously illuminated. When these lights are extinguished, it is an indication that the power is off. Employees observing these lights extinguished must report them to the train dispatcher.

SYSTEM SPECIAL INSTRUCTIONS

SPEED TABLE		
Miles Per Hour	Time Per Mile	
	Minutes	Seconds
5	12	0
10	6	0
15	4	0
20	3	0
23	2	36
25	2	24
27	2	12
30	2	0
32	1	52
35	1	43
38	1	35
40	1	0
43	1	24
45	1	20
48	1	15
50	1	12
52	1	09
55	1	06
58	1	02
60	1	0
62	0	58
65	0	55
68	0	53
70	0	51
72	0	50
75	0	48
78	0	46
80	0	45

Use to calculate Sight Distances when using Individual Train Detection or Lookout Protection.		
Maximum Authorized Speed (MPH)	Feet Per Second Traveled	Required 15 Second Sight Distance (Feet)
5	7	110
10	15	220
15	22	330
20	29	440
25	37	550
30	44	660
35	51	770
40	59	880
45	66	990
50	73	1,100
55	81	1,210
60	88	1,320
65	95	1,430
70	103	1,540
75	110	1,650
80	117	1,760

Conversion Chart - Feet to Tenths of A Mile	
Feet	Tenths of A Mile
528	0.1
1,056	0.2
1,584	0.3
2,112	0.4
2,640	0.5
3,168	0.6
3,696	0.7
4,224	0.8
4,752	0.9

METRA ELECTRIC DISTRICT
University Park Sub District

South Chicago Sub District - Blue Island Sub District

C. Smith, Director – Operations..... 312-322-7800
D. Santiago, Asst. Superintendent..... 312-322-7812
A. Maxey, Sr. Trainmaster..... 312-322-7802
B. Stejskal, Trainmaster..... 312-322-7809
T. Burklow, Trainmaster..... 312-322-7804
D. Ball, Trainmaster..... 312-322-7801
M. Koszulinski, Trainmaster 708-293-6121
V. Ortiz, Road Foreman..... 312-322-7806
S. Lukasik, Road Foreman 312-322-7805

S. Struhart, Director – Engineering..... 312-322-2745
R. Guajardo, Roadmaster..... 312-322-2791
A. Smith, Signal Supervisor..... 312-322-2794
D. F. Colantuono, B&B Supervisor..... 312-322-2778
L. Nichols, B&B Supervisor..... 312-322-2721
A. Lee, Engineering Supervisor..... 312-322-7867

E. Schafroth, Director - Electrical Maintenance... 312-322-2717
S. Mitchell, A.C. Electrical Supervisor..... 312-322-2722
D. Daneen, D.C. Electrical Supervisor..... 312-322-2716
D. Siano, Substation Supervisor..... 312-322-2719

ROCK ISLAND DISTRICT

Joliet Sub District and Beverly Sub District

D. N. Cook, Director – Operations..... 312-322-8963
D. Austin, Asst. Superintendent..... 312-322-8985
M. Yock, Sr. Trainmaster..... 312-322-8962
E. Hernandez, Trainmaster..... 312-322-8993
C. Del Toro, Trainmaster 312-322-8103
M. Koszulinski, Trainmaster 312-322-8957
J. Grogans, Road Foreman Engines 312-322-8992
T. Tabisz, Road Foreman Engines..... 312-322-7078
D. Marinellie, Road Foreman Engines 312-322-1590
E. Rosas, Road Foreman Engines 312-322-8993

J. Totos, Director – Engineering..... 708-293-6166
J. F. Cervantes, Roadmaster..... 708-293-6168
R. Venegas, Signal Supervisor..... 708-293-6161
L. Diaz, B&B Supervisor..... 708-293-6162

CHICAGO UNION STATION DISTRICT

Southwest Sub District

V. A. Flores, Director – Operations..... 312-322-8950
R. P. Oppenheim, Asst. Superintendent..... 312-322-8939
A. Farence, Sr. Trainmaster..... 312-322-7062
R. Tellin, Sr. Trainmaster..... 312-322-8940
M. Beecher, Trainmaster 312-542-8326
A. Battaglia, Trainmaster 312-322-8941
K. Lynch, Trainmaster 312-322-7063
C. Del Toro, Trainmaster 312-322-7923
K. Rice, Road Foreman Engines 312-322-6637
M. King, Road Foreman Engines 312-322-6675

J. D. Winchester, Director – Engineering... 312-322-4101
J. Rodriguez, Roadmaster (WL) 312-322-4143
B. Iskra, Roadmaster (NL) 312-322-4142
F. Swoyer, Signal Supervisor (NL)..... 312-322-4141
J. Walsh, Signal Supervisor (WL)..... 312-322-4140
 , B&B Supervisor 312-322-4106

MOKENA WIRE SHOP

M. Tempinski, Director Signal Construction 312-322-1855
C. Blanford, Mgr Signal & Training 312-322-1857
M. Darnell, Project Mgr – Eng Maintenance..... 312-322-1856

METRA DISPATCHING CENTER

G. Godfrey, Director - System Operations 312-322-2822
S. Hoye, Sr. Manager - Train Operations..... 312-322-2821
K. Georgeff, Chief Dispatcher 312-322-2864
J. Bratta, Chief Dispatcher 312-322-2841

Train Dispatchers

Metra Electric Terminal Dispatcher..... 312-322-2868
Metra Electric North Dispatcher..... 312-322-2861
Metra Electric South Dispatcher..... 312-322-2860
Rock Island Terminal Dispatcher..... 312-322-2854
Rock Island Road Dispatcher..... 312-322-2856
Southwest Dispatcher - Monday-Friday..... 312-322-2858
Southwest Dispatcher - Saturday-Sunday..... 312-322-2846

Metra Electric Power Desk

Power Desk..... 312-322-2472

Crew Management

A. Miller, Chief Crew Caller..... 312-322-2808
C. Shaw, Manager - Crew Dispatching..... 312-322-2817
Metra Electric Caller..... 312-322-2852
Rock Island Caller..... 312-322-2849
Chicago Union Station Caller..... 312-322-2853

METRA ELECTRIC DISTRICT

General Yardmaster

General Yardmaster - Randolph Street..... 312-322-2480

ROCK ISLAND DISTRICT

Control Operators

16th Street Tower..... 312-322-8958
Blue Island..... 708-388-7434

CHICAGO UNION STATION DISTRICT

Control Operators

Amtrak CUS North Train Director (6am-10pm) ... 312-655-2241
Amtrak CUS North Train Director (10pm-6am) 312-655-3751
Amtrak CUS South Train Director (6am-10pm)..... 312-655-2242
Amtrak CUS South Train Director (10pm-6am)..... 312-655-3755
CP 518 - NS Chicago Terminal Dispatcher 404-877-9540
Forest Hill - CSX Dispatcher..... 708-832-2066/2074
Landers Operator..... 773-470-4131
Belt Junction - BRC South Dispatcher..... 708-496-4103/4117
CP Ridge - IHB West Dispatcher..... 708-832-2165/2088

PTC OPERATIONS

PTC Help Desk (MTAC) 312-322-2782
T. Alonzo 312-322-6770(O) or 312-515-7360(C)
J. Dominguez..... 312-322-2813(O) or 312-520-3983(C)
E. Jimenez..... 312-322-4276(O) or 312-597-1005(C)
N. Russell..... 312-322-4283(O) or 312-507-1158(C)
D. Martinez..... 312-322-2814(O) or 312-907-3997(C)

RULES DEPARTMENT

A. Hunt, Director – Rules..... 312-322-4270
A. Gulbransen, Sr. Rules Examiner-PTC 312-322-7849
M. Brady, Sr. Rules Examiner-PTC 312-322-6547
T. Callaway, Rules Examiner..... 312-322-2819
R. Velasco, Rules Examiner 312-542-8170
A. Mota, Rules Examiner312-322-2815
D. Haywood, Rules Admin Asst 312-322-6703

TRAINING & CERTIFICATION

M. T. Fitts, Sr. Director-Training & Certification312-322-7087
R. J. Tague, Director - Training & Certification..... 312-322-4978
M. Kubiak, Supervisor - Locomotive Engineer..... 312-322-4977
T.I. Allen, Asst. Supv-Loco Eng, Simulator Mgr ... 312-322-6733
J. C. Woods, Asst. Supv. - Locomotive Eng..... 312-322-2804
J. Hodge, Asst. Supv. – Locomotive Eng 312-322-1482
W. Greene, Asst. Supv. – Locomotive Eng 312-322-7912
S. G. Jackson, Asst. Supv – Locomotive Eng 312-322-7856
D. M. Pedroza, Operations Trainer312-322-6715
V. Austin, Operations Trainer 312-322-6744
F. Ochoa, Operations Trainer 312-542-8132
M. Sirevicius, Dispatcher Trainer 312-322-1495
J. Thompson, Learning Mgmt Systems Admin 312-322-6682
N. Loomis, Administrative Assistant 312-322-8924

SAFETY & ENVIRONMENTAL


H. C. Konczal, Chief Safety & Envn Officer..... 312-322-6743
S. Cork, Director of Safety 312-322-6797
C. Bates, System Safety Engineer (MED).....312-590-7990
M. Denk, System Safety Engineer (CUS)..... 312-989-2425
I. Gonzalez, System Safety Engineer (RID)..... 312-597-1004
A. Preininger, Safety Training Officer 312-256-3794
L. Green, Public Safety Coordinator..... 312-735-9735
J. Watkins, Project Mgr-PTC/Safety 312-907-5951
D. Jamros, Safety Compliance Analyst.....312-322-8989
M. Ruvalcaba, Safety Compliance Analyst..... 312-322-6739
T. Cabonor, Director-IH & Envn Compliance 312-322-6907
D. Lewis, Mgr-Environmental Compliance 773-485-2373
M. Lampo, Industrial Hygiene Engineer II 312-465-6732
A. Page, Environmental Compliance Engineer ... 312-898-3973

Metra Police 312-322-2800

This image shows a full page of blank, lined paper. It features approximately 28 evenly spaced horizontal black lines across its entire width, providing a template for handwriting practice or general note-taking. The margins are consistent on all sides.

[illegible]

Metra

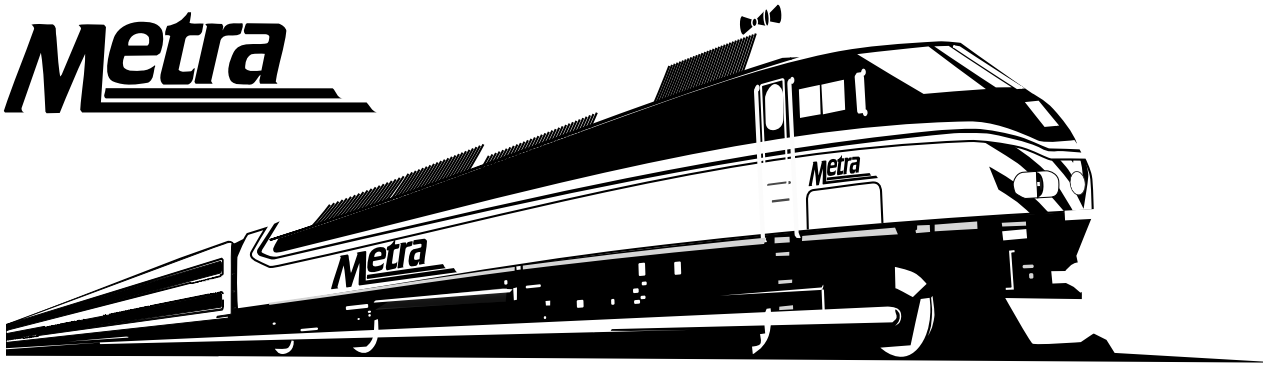

CUSTOMER SERVICE

1. APPEARANCE

First impressions last a long time

2. ATTITUDE

A learned behavior, make it positive

3. FRIENDLINESS

Be generous, give smiles unconditionally

4. IMPRESSION

What's left after I leave a customer

5. RESPONSIBILITY

Take action, exceed customer expectations

6. COMMITMENT

My pledge to service and teamwork

7. TEAM THINKING

My actions effect everyone in my organization

8. COMMUNICATION

Active listening and positive responses

9. SERVICE

My personal commitment to make a difference

10. PERSONAL EXCELLENCE

I believe in my ability to make a difference

ROCK ISLAND DISTRICT GENERAL ORDER NO: 7 ISSUED: FEBRUARY 3, 2025

DIRECTOR OF OPERATIONS – LASALLE STREET STATION

CONCERNING: MODIFICATIONS TO METRA SYSTEM SPECIAL INSTRUCTIONS NO. 1

Effective 2:00a.m. on Tuesday, February 4, 2025, Rock Island District General Order No. 2, dated January 1, 2025, is hereby canceled and replaced with this General Order.

Items identified by ► have been modified.

Front Cover – System Special Instructions No. 1, Effective April 1, 2020.
Change Personnel at Bottom of Page to Read:

Kevin McCann – Deputy Executive Director Operations
Vic Flores – Chief Transportation Officer
Scott Schiemann – Chief Engineering Officer
Kevin Clifford – Chief Mechanical Officer

Modifications to Joliet Sub District Special Instructions

Add CP Western Avenue, CP Interchange, and CP Robbins to the Joliet Sub District Table, change territory to CTC, and change control to Road Dispatcher: *(Effective 10/14/22)*

15.6	MED Connection <i>JCT Metra Electric District</i>	J	2 MT - CTC	Road Dispatcher	0.1
15.6	CP Burr Oak	HY			0.1
15.7	Blue Island	ABDMPTWY			0.2
15.9	CP Western Avenue <i>JCT Beverly Sub Dist</i>	HJX(2)			0.8
16.7	CP Interchange <i>JCT CSXT</i>	HJX			0.2
16.9	Robbins	DW			0.4
17.3	CP Robbins <i>JCT CSXT</i>	HJX(2)			1.1

6.31.1 PERMANENT SPEED RESTRICTIONS

(Effective 10/14/22) Add:

CP Western Avenue – On Siding 5PSGR 10.....FRT 10
CP Interchange to CP Robbins - On CON CSX.....PSGR 10.....FRT 10

(Effective 11/10/24) Add:

MP 40.11 to MP 40.18 – Over Diamond at UD Tower.....PSGR 10.....FRT 10
MP 40.11 to MP 40.6.....PSGR 25.....FRT 20

SPEED THROUGH TURNOUT OF SWITCHES- Change Location Names to Read:

Through No. 15 Switches at the Following Locations.....PSGR 25.....FRT 25

MP 15.71 and MP 15.78 - CP Western Avenue Crossover West of Grove St.

MP 15.99 and MP 16.05 - CP Western Avenue Crossover Between Main No. 1 and Main No. 2

MP 17.26 and MP 17.38 - CP Robbins Crossovers Between Main No. 1 and Main No. 2

JOLIET SUB DISTRICT INTERLOCKINGS AND CONTROL POINTS

Add CP Western Avenue, CP Interchange, and CP Robbins to the Table of Control Points and Interlockings: (Effective 10/14/22)

CP Burr Oak	Road Dispatcher	Control Point	TRK 2 - 15.53	TRK 2 - 15.59
CP Western Avenue	Road Dispatcher	Control Point	TRK 1 - 15.70	TRK 1 -16.09
CP Western Avenue	Road Dispatcher	Control Point	TRK 2 - 15.70	TRK 2 - 16.24
CP Interchange	Road Dispatcher	Control Point	TRK 2 - 16.68	TRK 2 - 16.78
CP Robbins	Road Dispatcher	Control Point	17.2	17.4

6.4.2 MOVEMENT WITHIN CONTROL POINTS OR INTERLOCKINGS

Delete the following verbiage and change last bullet point to read: (Effective 10/14/22)

Blue Island Interlocking – Passenger trains turning will be governed as follows:

- ~~• **Track No. 1 and Track No. 2** – After changing ends, passenger trains turning on Track No 1 and Track No 2 within Blue Island Interlocking are required to receive permission from the control operator to change direction.~~
- **Siding 5 at CP Western Avenue** – Trains changing direction on Siding 5 must receive permission from the Road Dispatcher if any part of the train overlaps a signal or moveable appliance.

~~6.32.2 AUTOMATIC WARNING DEVICES (Effective 08/09/22)~~

~~**At Blue Island** – The automatic warning devices at Vermont Street, MP 15.61, and Grove St, MP 15.7 can also be controlled manually by the control operator at Blue Island. Control operator must not raise gates which have lowered for an approaching train until the train has stopped clear of the crossing.~~

9.13.2 LOCATION OF DUAL CONTROL SWITCHES Add: (Effective 10/14/22)

CP Burr Oak	All Switches	CP Western Avenue	All Switches
CP Interchange	All Switches	CP Robbins	All Switches

9.18 ELECTRICALLY LOCKED SWITCHES AND DERAILS Add:

Metra's Track Inspector must be contacted prior to operating the switch at MP 3.50 or traversing the CRL North Wye.

▶ 9.18.1 LOCATION OF ELECTRICALLY LOCKED SWITCHES AND DERAILS Add:

MP 2.3	Main 2 - MOW Spur	MP 27.00	Main 2 - Ozinga Spur
MP 3.5	Main 2 - CRL North Wye	MP 28.11	▶ Main 1 - Schilling Spur
MP 6.36	Main 1 - NS Connection	MP 29.59	▶ Main 1 - Mokena MOW Spur
MP 14.3	Main 2 - CRL Connection	MP 32.49	▶ Main 2 - MOW Spur Anderson Rd.
MP 15.58	Main 1 - Metra Electric Connection	MP 34.08	▶ Main 1 - New Lenox MOW Spur
MP 20.95	Main 2 - Oak Forest MOW Spur	MP 38.74	Main 2 - CN Connection
MP 23.54	Main 2 - MOW Spur	MP 39.03	▶ Main 1 - MOW Spur

13.0 RULES APPLICABLE ONLY IN AUTOMATIC CAB SIGNAL SYSTEM (ACS)**TERRITORY****OPERATION OF NON-CAB SIGNAL EQUIPPED TRAINS OPERATING IN CAB SYSTEM TERRITORY Add:**

Non-cab signal equipped trains operating in cab signal territory will be governed by the restrictions listed in Metra's System Special Instructions unless operating under Positive Train Control (PTC).

The restrictions under Rule 13.0 in the Joliet Sub District Special Instructions do not apply to non-cab signal equipped trains operating in cab signal territory if they are operating with PTC.

If the PTC system fails or is cut-out for any reason, Rule 13.0 of the Joliet Sub District Special Instructions will apply.

13.1.4 CAB SIGNALS CUT IN AND OUT Add:

Prior to initializing the Positive Train Control (PTC) System on a train, the Automatic Cab Signal System on the lead unit (if so equipped) must be cut out.


If the PTC system is cut out or otherwise fails enroute on a train equipped with ACS while in ACS territory, the train must stop, and the ACS must be cut in. Once cut in, the train must operate per Cab Signal System rules.

If the ACS system then fails, Rule 13.3.3 Movement with Inoperative Cab Signal Device will apply.

13.3.3 MOVEMENT WITH INOPERATIVE CAB SIGNAL DEVICE

Change Diagram B and third bullet point:

- Proceed according to block signal indications, not exceeding 59 MPH.

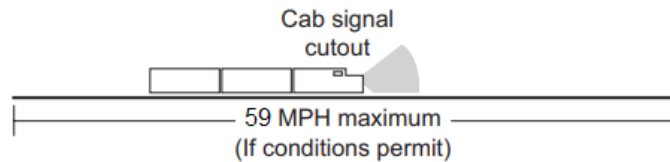

In addition:

- A rules qualified employee must occupy the control cab with the engineer.
- or
- If the conductor has a radio, the provisions of System Special Instruction 1. 47D apply

Modifications to Beverly Sub District Special Instructions

Change timetable characters to reflect the removal of the crossover at CP Vermont:
(Effective 06/24/23)

16.3	CP Vermont Street	HY	2 MT - CTC	Road Dispatcher	0.1
16.4	Blue Island	ABDF PRWY			0.2
16.6	CP Western Avenue JCT Joliet Sub District	JHX(2)			0.8 to Interchange

***Beverly Sub District** – Limits begin at MP 10.12 and end at CP Western Avenue on BV1 at MP 16.51 and BV2 at MP 16.52.

SPEED THROUGH TURNOUT OF SWITCHES Add: (Effective 06/24/23)

	PSGR	FRT
MP 16.3 — Through Crossover at CP Vermont.....	10	10

BEVERLY SUB DISTRICT INTERLOCKINGS AND CONTROL POINTS (Effective 07/22/22)

Change CP Vermont to read:

Station	Controlled By	Type of Operation	East Limits	West Limits
CP Vermont	Road Dispatcher	Control Point	BV1 - 16.22	BV1 - 16.29
CP Vermont	Road Dispatcher	Control Point	BV2 - 16.22	BV2 - 16.29

6.32.2 AUTOMATIC WARNING DEVICES: *(Effective 07/22/22)*

~~At Blue Island – The automatic warning devices at Vermont Street, MP 16.34, and Grove Street, MP 16.43 can also be controlled manually by the control operator at Blue Island. Control Operator must not raise gates which have lowered for an approaching train until the train has stopped clear of the crossing.~~

8.5 CLEARING MAIN TRACK BEFORE RESTORING SWITCH Delete Rule: *(Effective 07/22/22)*

~~Trains moving into the west end of Blue Island Coach Yard at CP Vermont Street must not restore main track switch to Normal position until the trailing wheels of the movement pass the yellow insulated joint located just west of the yard track No. 2 switch.~~

9.13.2 – Location of Dual Control Switches Add: *(Effective 06/24/23)*

CP Vermont ————— All Switches

Modifications to System Special Instructions

1.5 DRUGS AND ALCOHOL (Delete the following verbiage from SSI and refer to GCOR) *(Effective 6/22/2022)*

~~The use or possession of alcoholic beverages, intoxicants, over the counter or prescription drugs, narcotics, controlled substances, (to include synthetics) or medication that may adversely affect safe performance is prohibited while on duty or on company property, except medication that is permitted under rule 1.5.1 (Metra drug and alcohol policies). Employees must not have any prohibited substances in their bodily fluids when reporting for duty, while on duty or while on company property.~~

Rule G

Metra's rule prohibiting drug and alcohol use and possession is known as Rule G. It applies to ALL employees. Employees who violate Rule G are subject to discipline, up to and including termination.

1) The use of controlled substances by employees at any time is prohibited. Employees must not use, be under the influence of, have in their bodily fluids, or have in their possession any synthetic or non-synthetic substances (including drug paraphernalia), including those Doctors prescribe while on duty, subject to performing service, and/or while on Metra property. (See Rule G Exceptions, Section IV. D as applicable). These substances include but are not limited to:

- A. Drugs.
- B. Alcohol, including but not limited to beverages, medications containing alcohol, and products containing alcohol.
- C. Intoxicants
- D. Medications (see section IV.D for exceptions
- E. Other controlled substances

2) Metra prohibits regulated and safety-sensitive employees from using alcohol within four hours of reporting for service, or after receiving notice to report to service (whichever time is less). In this regard, any employee, including a regulated employee, having a breath or blood alcohol concentration of .02 and above violates Metra's policy. (Metra will not use a test measuring less than .02 against an employee to impose discipline). Regulated employees who have a breath or blood alcohol level of .04 and above also violate federal regulations.

3) Regardless of any State laws that legalize marijuana, Metra prohibits employees' use or possession of marijuana (or marijuana paraphernalia), or having detectable amounts of marijuana in their bodies, including synthetic substances, for any reason while on duty, subject to duty, on Metra property, or in Metra work equipment and vehicles.

1.5.1 METRA DRUG AND ALCOHOL POLICIES Delete the following verbiage from SSI and refer to Corporate Policy HR-01.14 Drug and Alcohol Policy and HR-01.14P1 for Drug and Alcohol Procedures (Effective 6/22/22)

- ~~Policy A — For employees covered under the Hours of Service Act and those in safety-sensitive positions and coincides with the requirements of Federal Rules CFR Parts 40, 219, 225, 240, 242, and 382. While meeting the federal regulations as stipulated, Metra is also testing under its own policy. All employees whose job requires a Commercial Driver's License (CDL) are covered under federal Motor Carrier Safety Administration (FMCSA)~~
- ~~Policy B — For all employees not covered under "Policy A".~~

5.4.9 DISPLAY OF AWARENESS TEST FLAG Add New Rule: (Effective 09/15/2021)

Awareness Test Flags may be displayed on main line track to test situational awareness of crew members on the leading end of moving equipment. They will not be specified on a Daily Operating Bulletin.

Awareness Test Flags will be displayed to the right of the track as viewed from an approaching train. In multiple main track territory or where sidings are adjacent to main track(s), they will be placed on the field side of outside tracks. When the flag is displayed beyond the first rail of an adjacent track, the flag will not apply to the track on which the train is moving.

When an Awareness Test Flag is displayed, within 1 mile after encountering the flag, the crew member who is responsible for protecting the leading end of the equipment must establish radio communication with another crew member to report the approximate location where the Awareness Test Flag was encountered.

6.32.2 CROSSING WARNING DEVICES (Highway/Pathway – Rail Grade Crossing). Under Item B: (Effective 5/18/2022)

Change ITEM 3 to read:

ITEM 3 – EQUIPPED FLAGGERS ARE PRESENT PROVIDING WARNING FOR ALL DIRECTIONS OF APPROACHING TRAFFIC. Trains that receive an Item 3 bulletin may proceed over the crossing at normal speed without stopping.

Item 3 Bulletins will be issued under General Information on the Daily Operating Bulletin.

Add New Rule:

BARRICADED CROSSING - CROSSING DEVICES ARE OUT OF SERVICE AND THE CROSSING IS BARRICADED AND CLOSED TO VEHICULAR TRAFFIC. Trains that receive a Barricaded Crossing bulletin may proceed over the crossing at normal speed without stopping.

Barricaded Crossing bulletins will be issued under Barricaded Crossings on the Daily Operating Bulletin.

15.0 TRACK BULLETIN RULES

Track bulletins will be numbered with the following numbers:

Track Bulletins will be numbered beginning with the following numbers: New Table

Location	Track Bulletins	General Information Bulletins	DC Bulletins
Joliet	1100 - 1199	1200 - 1299	N/A
Beverly	6100 - 6199	6200 - 6299	N/A
SWS	3100 - 3199	3200 - 3299	N/A
University Park	2100 - 2199	2200 - 2299	2300 - 2399
Blue Island	4100 - 4199	4200 - 4299	4300 - 4399
South Chicago	5100 - 5199	5200 - 5299	5300 - 5399

15.1 Track Bulletins under “Receipt and Comparison of Track Bulletins add new paragraph:

Daily Operating Bulletin (DOB) Add additional language:

If a train is operating when a new DOB takes effect, the train may continue to operate with the prior DOB. A crew member must contact the train dispatcher and verify that no additional bulletin exceptions or track bulletins are needed for their movement.

The Train Dispatcher will be responsible for verbally and electronically assigning any additional bulletin exceptions or track bulletins required for movement.

15.4 Protection When Tracks Removed from Service. Add:

When PTC is Cut in and Active, Restricted Mode must be used to enter Tracks Removed from Service once proper authority is obtained.

18.2 Taking Charge of PTC Equipped Trains. Change rule to read:

When taking charge of a train, the engineer must confirm:

1. The PTC circuit breaker and cut out switches are in the cut in position.
 - If a PTC circuit breaker or cut out switch is found in the off position, notify the train Dispatcher for instructions.
 - Crews are prohibited from turning off PTC circuit breakers unless authorized by the train Dispatcher.
 - Crews are prohibited from turning off PTC circuit breakers unless authorized.
2. The PTC system on the controlling locomotive is initialized.
 - If the system fails to initialize, notify the train dispatcher for instructions.
 - If the system fails to initialize at a train's **Initial PTC Terminal**, the train may depart (without passengers) and proceed to the next forward designated PTC repair point. Movement must be governed by Rule 18.12. (Movements with Inoperative PTC System). These restrictions do not apply if the failing locomotive is repaired or replaced.
 - If the system fails to initialize at a designated **PTC Repair Point**, the failing locomotive must not be operated as the lead unit unless repaired or replaced.
3. Departure test is performed at the train's initial terminal or when prompted by the PTC system.

When an engineer is relieved before a trip is completed, the PTC system must be logged off before the relieving engineer takes charge of the train unless otherwise authorized.

18.7 Comparison of PTC Display Information. Change first sentence of rule to read: (Effective 1/1/2023)

~~Before departing.~~ **After each Initialization**, crew members on the controlling locomotive must compare information such as track bulletins, restrictions, and authorities shown on the PTC display with those in their possession.

18.9 Use of Restricted Mode Change Rule to Read:

Restricted Mode must be turned on before performing the following work events:

- Switching
- Pickups or Setouts
- Headroom Moves
- Entering Form D Limits (once proper authority is obtained)

After the work event has been completed, turn off restricted mode.

18.12 Movements with Inoperative PTC System: Add new rule:

Immediately notify the train dispatcher when the controlling locomotive's PTC system becomes inoperative, except when operating where PTC is suspended by Mandatory Directive.

When the PTC System on the controlling locomotive becomes inoperative while enroute, unless otherwise restricted, the following speeds will govern:

In non-signaled territory, or when operating against the current of traffic in Rule 9.14 (Movement with the Current of Traffic) territory:

- Trains transporting one or more loaded cars containing TIH/PIH 30 MPH
- All other trains 40 MPH

In signaled territory:

- Freight trains transporting one or more loaded cars containing TIH/PIH 40 MPH
- Freight trains not transporting loaded cars containing TIH/PIH 49 MPH
- Passenger trains..... 59 MPH

18.14 Train Dispatcher Notification: Change rule number and rule to read:

If any of the following conditions occur, the occurrence must be reported to the train dispatcher.

- Failure to Initialize
- PTC system becomes inoperative enroute.
- Discrepancies between the PTC display, mandatory directives, or wayside systems.
- Any time PTC system initiates braking enforcement.
- PTC is suspected of not providing warning as intended.
- Any unusual occurrence which may have attributed to a PTC issue.

When reporting an issue to the train dispatcher, include the following information:

- Train Identification Number
- Locomotive/Cab Car Number
- Time and location of occurrence

An PTC Trip Report must be submitted to Metra's Technical Assistance Center as soon as possible after the end of the affected trip.

Chapter 18 Abbreviations Add:

PTC – Positive Train Control

PIH – Poisonous Inhalation Hazard

TIH – Toxic Inhalation Hazard

Chapter 18 Definitions Add:

Initial PTC Terminal – A location where a locomotive first initializes PTC following a Class I or IA brake test.

PTC Repair Point – A repair facility where a train that cannot initialize PTC must not depart

The following locations are designated PTC Repair Points for Metra Trains:

- Western Avenue Coach Yard
- 47th Street Maintenance Facility
- 14th Street Metra/BNSF Maintenance Facility
- 18th Street Maintenance Facility

PTC Inoperative – A condition in which the PTC system is unable to initialize or is initialized but has transitioned into a degraded mode.

Degraded Mode – A PTC system state other than active where PTC is not providing enforcement for all conditions. This includes the Disengaged, Failed, and the Cut-Out state.

LEAVE ADMINISTRATION AND MEDICAL SERVICES PROGRAM INFORMATION (Page 88)
(Effective 11/03/2023)

547 West Jackson Boulevard 12th
Floor - East
Chicago, Illinois 60661

Drug and Alcohol Program	312 542-8124
Leave Administration	312 322-8901 ext 4
Leave Administration Fax.	224 432-6077
FMLA/Medical Leave Email	FMLAMetra@metrarr.com
On Duty Use of Medication Forms	HRMedical@metrarr.com

Employee Assistance Program -
Provided by Perspectives, Ltd. 800 456-6327 (call or text)

CHIEF MEDICAL OFFICER
Concentra – Presidential Towers
614 West Monroe Street – First Floor
Chicago, Illinois 60661

Telephone.....312 258-0700
Fax.....312 258-0705

All appointments, except Periodic Physical Examinations, are made by Leave Administration / Medical Services Programs.

MANDATORY PERIODIC PHYSICAL EXAMINATIONS

Certain employees in safety sensitive positions are required to take physical examinations at specified intervals. Employees due for examination will receive notification, by mail, from their District Director. The District Director and Medical Services Programs maintains records.

Schedule of Examinations:

Under Age 55:	Every Two Years	Every Five Years
Age 55 and	<u>Every Year</u>	<u>Every Three Years</u>
	Train Service Employees	Control Operators
	Engineers	Train Dispatchers
	Yardmasters	Tower
	Load Supervisors	GEB Tower Clerks

MEDICAL LEAVE OF ABSENCE DUE TO ILLNESS OR INJURY

To request a leave, view the current policy, or find frequently asked questions, visit the Employee Portal using this link: <https://employee.metrarr.com/Department/human-resources/Page/medical-leave> or use the following instructions: Click on the 'Departments' tab, choose Human Resources, click 'Leaves of Absence' from the options on the left, then choose 'Medical Leave' from the drop down list. A link to the FMLA/Medical Leave SharePoint request form is located there. Completed forms must be returned directly to Leave Administration via email at FMLAMetra@metrarr.com or fax at 224-432-6077.

PRESCRIPTION MEDICATION

Safety sensitive and regulated employees may take prescribed dosages unless the medication in any way adversely affects their alertness, coordination, reaction, response, or safety while performing their duties. Employees must obtain approval from Medical Services Programs prior to using any prescription medications in accordance with the Drug and Alcohol Procedure. Prescription medication approval forms can be found on the employee portal by using this link: <https://employee.metrarr.com/Department/human-resources/Page/drug-and-alcohol> and completing the form Medication Form. Employees can also use the following instructions: click on the 'Departments' tab, choose Human Resources, click on the 'Drug and Alcohol' option from the list on the left and then find the PDF on the page titled, "Medication Form". Employees should send the form to hrmedical@metrarr.com for approval.

TREATMENT OTHER THAN EMERGENCY RESULTING IN TRANSPORTION TO A CONCENTRA LOCATION

An Authorization Form will be completed and forwarded to Concentra by the Leave Administration Department following notification, from the employee's District, of an on-duty injury requiring medical treatment. This form authorizes Concentra to evaluate the injured employee.

LEAVE ADMIN & MEDICAL SERVICES CONTACT INFORMATION


M.Chemasko, Director	312-322-8921
N. Lang, Mgr, Leave Administration	312-322-4979
R.Olsen, Mgr, Medical Service Programs	312-542-8124
Leave Administration	312-322-8901 ext. 4
Leave Administration fax	224-432-6077
Leave Administration email	fmlametra@metrarr.com
Medical Services email	hrmedical@metrarr.com

ADD ROADWAY SIGNS, TRACK FLAGS, BANNERS, AND MAIN TRACK SWITCH TARGETS (Page 90)

Awareness Test Flag (*Effective 09/15/2021*)



Track Without Power Lines Sign - Metra Electric District (*Effective 12/17/2021*)

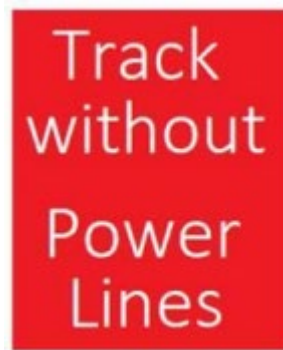

Numeric Mile Post Marker (*Effective 11/22/2024*)




METRA ELECTRIC DISTRICT		OGILVIE TRANSPORTATION CENTER DISTRICT	
D. Santiago, Director – Operations	312-322-7812	D. Ridder, Director – Operations	708-277-3152
B. Stejskal, Assistant Superintendent	312-322-7809	T. Jermany, Assistant Superintendent	708-466-0686
A. Maxey, Sr. Trainmaster	312-322-7802	C. Gibson, Sr. Trainmaster	312-322-8962
D. Ball, Trainmaster	312-322-7802	C. Irvan, Trainmaster	312-342-3800
J. Draper, Trainmaster	312-322-7812	J. Gonzalez, Trainmaster	872-265-9550
S. Hoover, Trainmaster	312-322-7804	R. Dorman, Trainmaster	312-632-9436
S. Lukasik, Road Foreman of Engines	312-322-7805	J. Ochoa, Road Foreman of Engines	312-852-1681
J. Kielczynski, Road Foreman of Engines	312-322-7806	B. Srieb, Road Foreman of Engines	312-322-6772
		C. Buford, Road Foreman of Engines	872-265-9550
S. Struhart, Director - Engineering	312-322-2745		
J. Rodriguez, Roadmaster	312-322-2765	MOKENA WIRE SHOP	
M. Lewis, Signal Supervisor	312-322-2794	R. Moya, Director – Signal Construction	312-322-1855
R. Mezo, Signal Supervisor	312-589-8849	C. Blanford, Manager Signal & Training	312-322-1857
D. Colantuono, B&B Supervisor	312-322-6132	J. Walsh, Supervisor Signal & Training	312-322-1852
L. Nichols, B&B Supervisor	312-322-2721	R. Thomas, Manager of Signal Construction	312-322-1864
E. Hartwig, B&B Supervisor	312-322-7867	S. Harvey, Manager of Signal Testing	312-322-1863
		P. Belmonte, Supervisor Signal Projects	312-322-1851
R. Castro, Director – Electrical Maintenance	312-322-2717	J. Lane, Supervisor Signal Projects	312-322-1661
S. Savvas, A.C. Electrical Supervisor	312-322-2722		
J. Burns, Asst Supervisor Electrical Maintenance	312-322-2716		
A. Vitalis, Substation Supervisor	312-322-2719	METRA DISPATCHING CENTER (CCF)	
C. Lawrence, Asst Supervisor Substation	312-907-6116	G. Godfrey – Director – System Operations	312-322-2822
		R. Wesolowski – Assistant Superintendent CCF	312-322-2821
		R. Markman, Manager CAD and PTC Projects	312-322-1036
ROCK ISLAND DISTRICT		K. Georgeff, Chief Dispatcher	312-322-2864
D. Austin, Director – Operations	312-322-8985	J. Bratta, Chief Dispatcher	312-322-2841
D. Marinellie, Assistant Superintendent	312-322-1590		
M. Yock, Sr. Trainmaster	312-322-8962	Train Dispatchers	
E. Hernandez, Trainmaster	312-322-8993	Metra Electric Terminal Dispatcher	312-322-2868
L. Williams, Trainmaster	312-322-7921	Metra Electric North Dispatcher	312-322-2861
VACANT, Trainmaster	312-322-8963	Metra Electric South Dispatcher	312-322-2860
J. Maxson, Road Foreman of Engines	312-322-7078	Rock Island Terminal Dispatcher	312-322-2854
B. Chaney, Road Foreman of Engines	312-322-1584	Rock Island Road Dispatcher	312-322-2856
▶ A. Hall, Road Foreman of Engines	312-322-8992	Southwest Dispatcher (Monday – Friday)	312-322-2858
		Southwest Dispatcher (Saturday – Sunday)	312-322-2856
J. Totos, Director – Engineering	708-293-6166		
J. Welgos, Roadmaster	708-293-6167	Metra Electric Power Desk	312-322-2472
J. Welgos, Roadmaster	312-834-9706		
R. Venegas, Signal Supervisor	708-293-6161	Crew Management	
L. Diaz, B&B Supervisor	312-459-4262	C. Shaw, Manager – Crew Dispatching	312-322-2817
S. Holmes B&B Supervisor	312-459-4262	Metra Electric District Caller	312-322-2852
		Rock Island District Caller	312-322-2849
CHICAGO UNION STATION DISTRICT		Chicago Union Station District Caller	312-322-2853
R. Tellin, Director – Operations	312-322-8940		
A. Battaglia, Assistant Superintendent	312-322-8941	Control Operators / Yardmasters	
A. Farence, Sr. Trainmaster	312-322-7062	MED – General Yardmaster – Randolph Street	312-322-2480
C. DelToro, Sr. Trainmaster	312-322-7923	RID – 16 th Street Tower	312-322-8958
M. Beecher, Trainmaster	312-542-8326	SWS – CP 518 – NS Chicago Terminal Dispatcher	470-463-1109
T. Williams, Trainmaster	312-542-8312	SWS – NS Landers Operator	773-470-4131
VACANT, Trainmaster	312-322-7063	SWS – Forest Hill CSX Operator	708-832-2066
K. Rice, Road Foreman of Engines	312-322-6637		708-832-2074
M. King, Road Foreman of Engines	312-322-6675	SWS – Belt Junction BRC Operator	708-496-4103
L. Welling, Director – Engineering	312-322-4101		708-496-4117
B. Iskra, Roadmaster	312-322-4142	SWS – CP Ridge IHB West Dispatcher	708-832-2165
S. Mullholland, Roadmaster	312-322-4143		708-832-2088
I. Torres, Roadmaster	312-420-9067	Amtrak CUS North Train Director (6am-10pm)	312-655-2241
R. Tressler, Signal Supervisor	312-322-4141	Amtrak CUS North Train Director (10pm-6am)	312-655-3751
J. Narbone, Signal Supervisor	312-322-4134	Amtrak CUS South Train Director (6am-10pm)	312-655-2242
B. Clark, B&B Supervisor	312-287-2658	Amtrak CUS South Train Director (10pm-6am)	312-655-3755
N. Fillion, B&B Supervisor	312-322-4106		

RULES DEPARTMENT		SAFETY AND ENVIRONMENTAL COMPLIANCE	
A. Hunt, Sr. Director – Ops. Training & Rules	312-322-4270	S. Cork, Sr. Director Interline Train Ops	312-322-6797
A. Gulbransen, Sr. Manager – Rules	312-322-7849	T. Cabonor, Sr. Director Safety & Industrial Hygiene	312-322-6907
M. Brady, Manager – Rules	312-322-6547	I. Gonzales, Mgr. Safety Reporting & Risk Red	312-322-6906
T. Allen, Sr. Rules Examiner	312-322-6733	D. Lewis, Manager Environmental Compliance	312-322-6976
T. Callaway, Rules Examiner	312-322-2819	D. Wokurka, Mgr. System Safety Engineering	312-322-6927
P. Salazar, Rules Examiner	312-322-6703	C. Bates, Project Manager System Safety	312-322-1542
T. Hatchett, Rules Examiner	312-322-6649	J. Berens, Project Manager Envr. Compliance	312-322-6978
A. Mota, Rules Examiner	312-322-2815	A. Page, Project Manager Envr. Compliance	312-322-6991
H. Escalante, Rules Examiner	312-322-6421	J. Chavez, Safety Compliance Analyst	312-322-1598
		R. Iravarren, Safety Compliance Analyst	312-322-6739
		A. Misiak, Safety Compliance Analyst	312-322-1655
TRAINING AND CERTIFICATION		D. Alvarado, Safety and Envr. Training Officer	312-322-6634
M. Fitts, Sr. Director Training and Certification	312-322-7087	B. Zambonino, System Safety Engineer (MED)	773-815-0974
R. Tague, Director Training and Certification	312-322-4978	A. Lopez, System Safety Engineer (CUS)	773-812-3906
M. Kubiak, Manager Locomotive Engineers	312-322-4977	M. Clifton, System Safety Engineer (RID, SWS, HC)	312-622-7356
J. Woods, Sr. Ops. Trainer – ASLE	312-322-2804	D. Canty, System Safety Engineer	312-322-4292
W. Greene, Sr. Ops. Trainer – ASLE	312-322-7912		
S. Jackson, Ops. Trainer – ASLE	312-322-7856	PTC OPERATIONS	
D. Dering, Ops. Trainer – ASLE	312-322-8969	E. Jimenez, Director PTC Operations and Regulatory	312-322-4276
F. Palacios, Ops. Trainer – ASLE	312-322-6690	J. Dominguez, Manager PTC Testing	312-322-2813
K. Wordlaw, Ops. Trainer – ASLE	312-322-6438	E. Aspenson, Manager PTC Safety and Compliance	312-322-6786
W. Pennington, Ops. Trainer – ASLE	312-322-6700	N. Russell, Sr. PTC Train Ops Engineer	312-322-4283
F. Ochoa, Sr. Operations Trainer	312-542-8132	T. Burklow, Sr. PTC Train Ops Engineer	312-322-6770
D. Pedroza, Sr. Operations Trainer	312-322-6715	D. Heer, Sr. PTC Train Ops Engineer	312-322-7359
T. Kenzel, Operations Trainer	312-322-6787	J. McCleary, Sr. PTC Train Ops Engineer	312-322-1875
M. Sirevicius, Ops. Trainer – Dispatch	312-322-1495	M. Roth, Sr. PTC Train Ops Engineer	312-322-1873
D. Hladek, Ops. Trainer – Dispatch	312-322-7370	PTC Help Desk (MTAC)	312-322-2782
J. Thompson, Learning Mgmt. System Admin	312-322-6682		
D. Horton, Administrative Assistant	312-322-8924	METRA POLICE	
			312-322-2800

POSTED _____ AM/PM _____, 2025 BY _____


FILED _____ AM/PM _____, 2025 BY _____

----- EAST WEST ----->

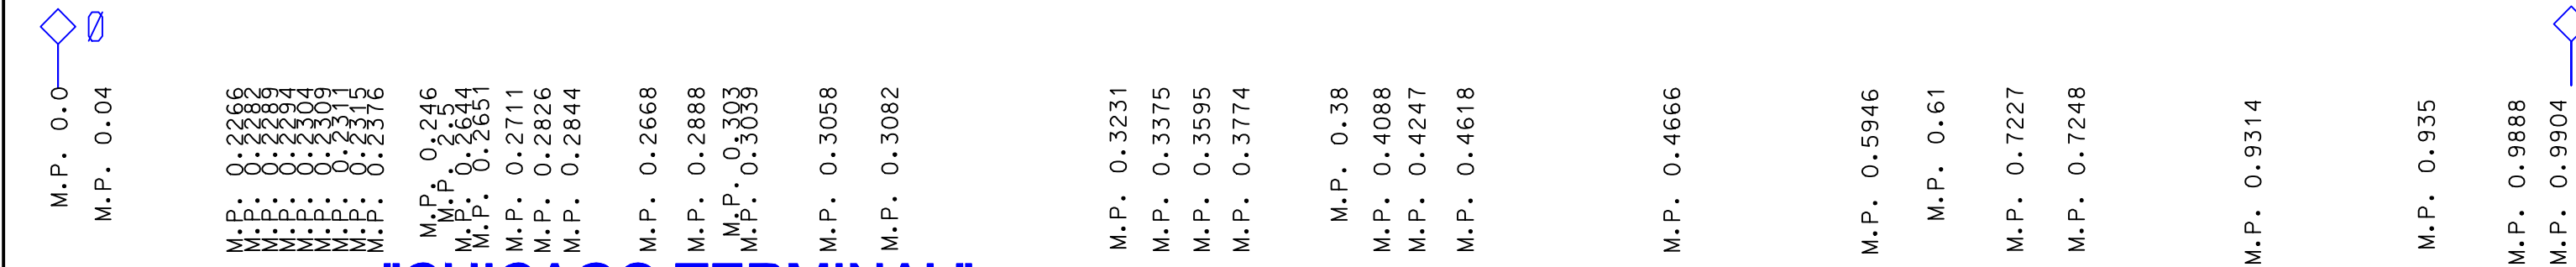

"CHICAGO TERMINAL"
(Chicago Term)

"16TH ST"

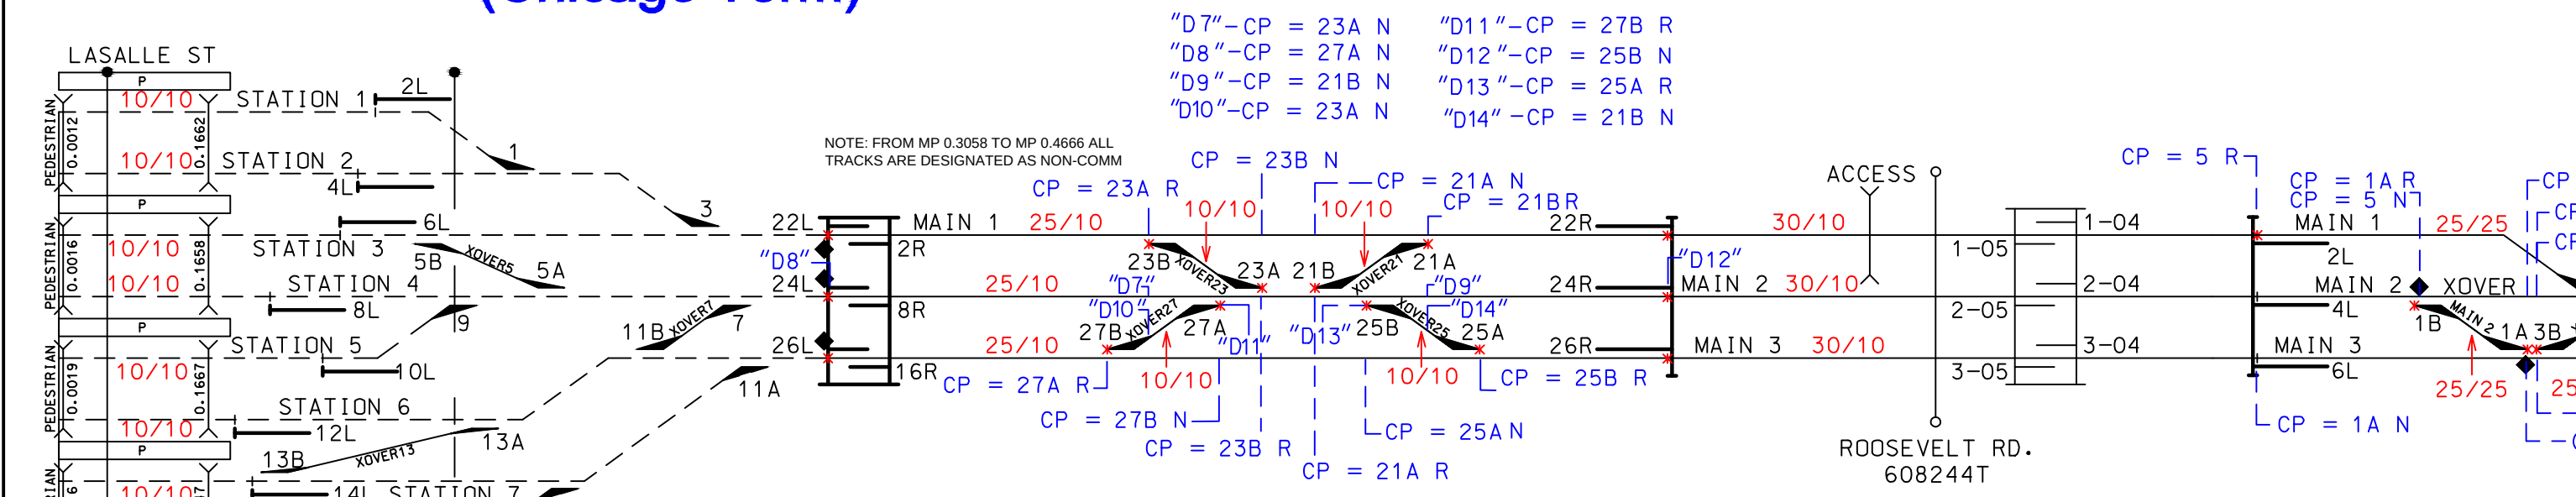

NOTE: FROM MP 0.3058 TO MP 0.4666 ALL TRACKS ARE DESIGNATED AS NON-COMM

"D7"-CP = 23A N "D11"-CP = 27B R
"D8"-CP = 27A N "D12"-CP = 25B N
"D9"-CP = 21B N "D13"-CP = 25A R
"D10"-CP = 23A N "D14"-CP = 21B N

LEGEND:

CROSSINGS:
OVERHEAD
AT GRADE
UNDERPASS

SWITCHES:
HANDTHROW
SPRING
ELECTRIC LOCK
POWER

LINESTYLES:
--- = PTC
--- = PTC ENTRY
--- = NON PTC
--- = FOREIGN RR
--- = YARD TRACK

SIGNALS:
--- = ABSOLUTE
--- = AUTOMATIC
--- = DWARF
--- = VIRTUAL

Metra Subdiv/Metra Maintained
Metra Subdiv/Not Metra Maintained
Not In Metra Subdiv/Metra Maintained
Not In Metra Subdiv


WIRELESS APPROACH CIRCUIT
SUBDIVISION CHANGE POINT
TRACK NAME CHANGE
PLATFORM
DERAIL
FUTURE PERMANENT DERAIL
ADVANCE WARNING
RESUME SPEED

NOTE:
1. PSS = PASSENGER
2. FR = FREIGHT
3. CP = CLEARANCE POINT
4. MAXIMUM SPEEDS PER METRA TIME TABLE ARE SHOWN IN (GREEN).
5. SPEED RESTRICTIONS ARE SHOWN IN RED.
6. * = INDICATES SPEED CHANGE
7. SPEEDS SHOWN PSS/FR
8. CROSSING MILEPOSTS ARE THE BEGINNING MILEPOSTS ON THE MAIN TRACK.
9. "D#" = INDICATES CLEARANCE POINT DETAIL


REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS MP 0.0 -1.0	SHEET NO. 1
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & E38				

<----- EAST

WEST ----->

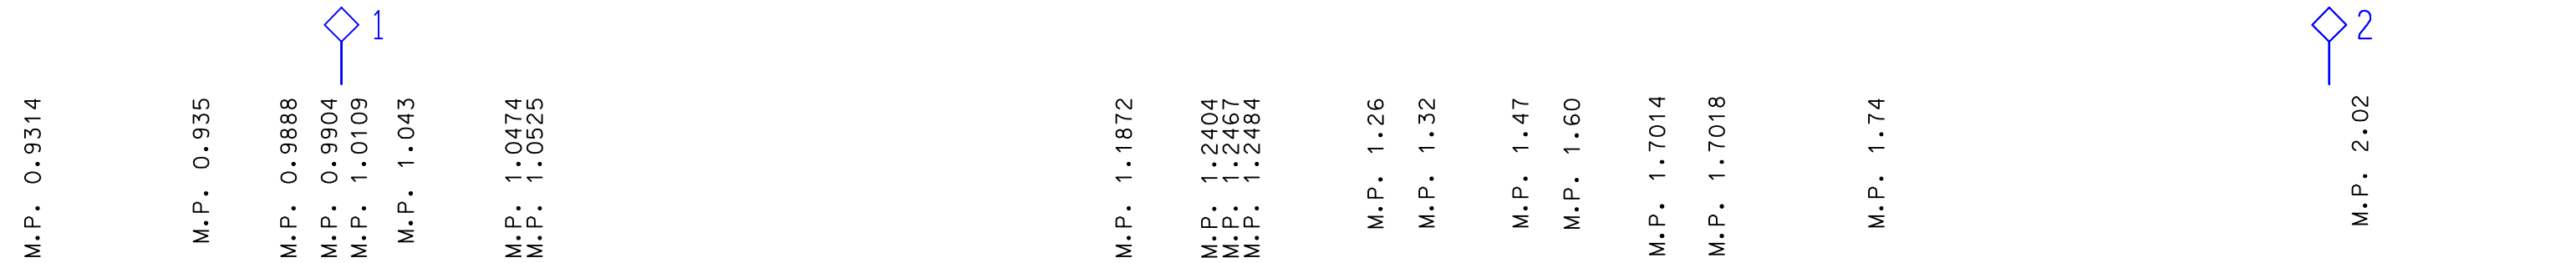


"16TH STREET INTERLOCKING"
(16th)

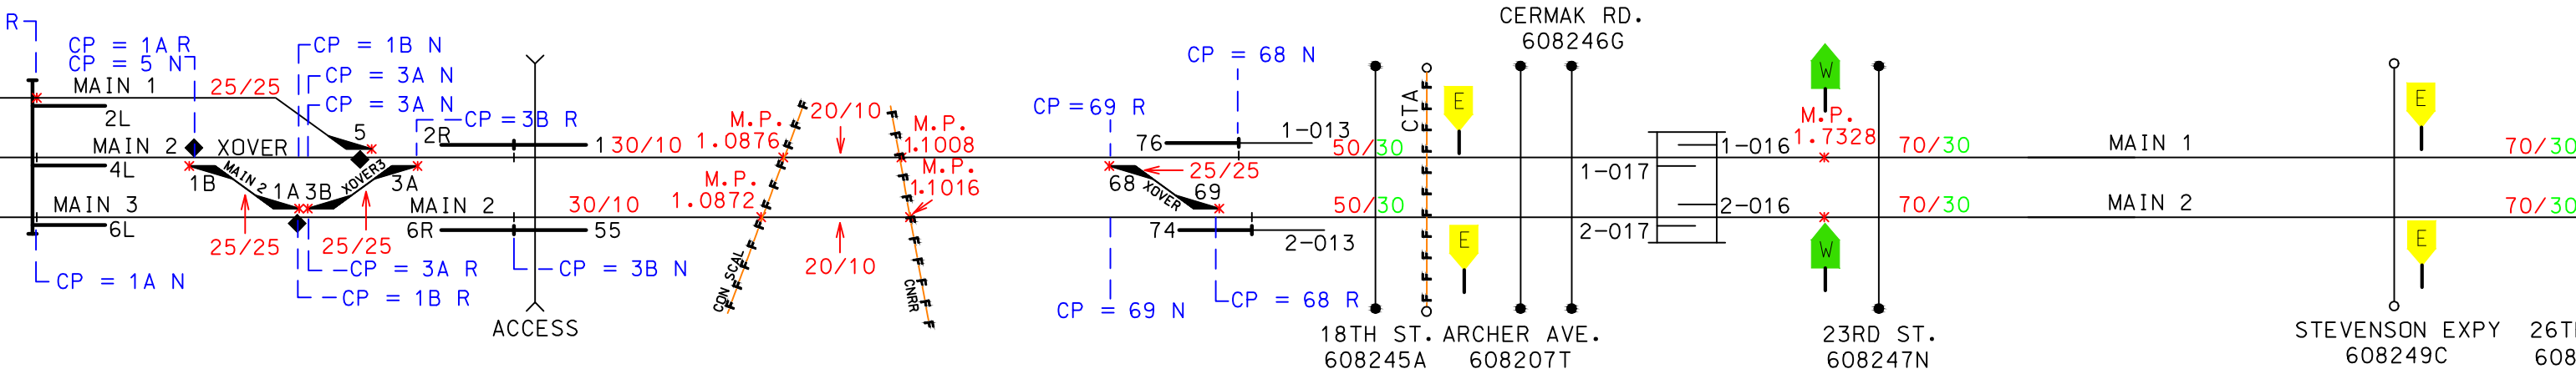

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS MP 1.0 - 2.0	SHEET NO. 2
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CONISCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & E38				

<----- EAST

WEST ----->

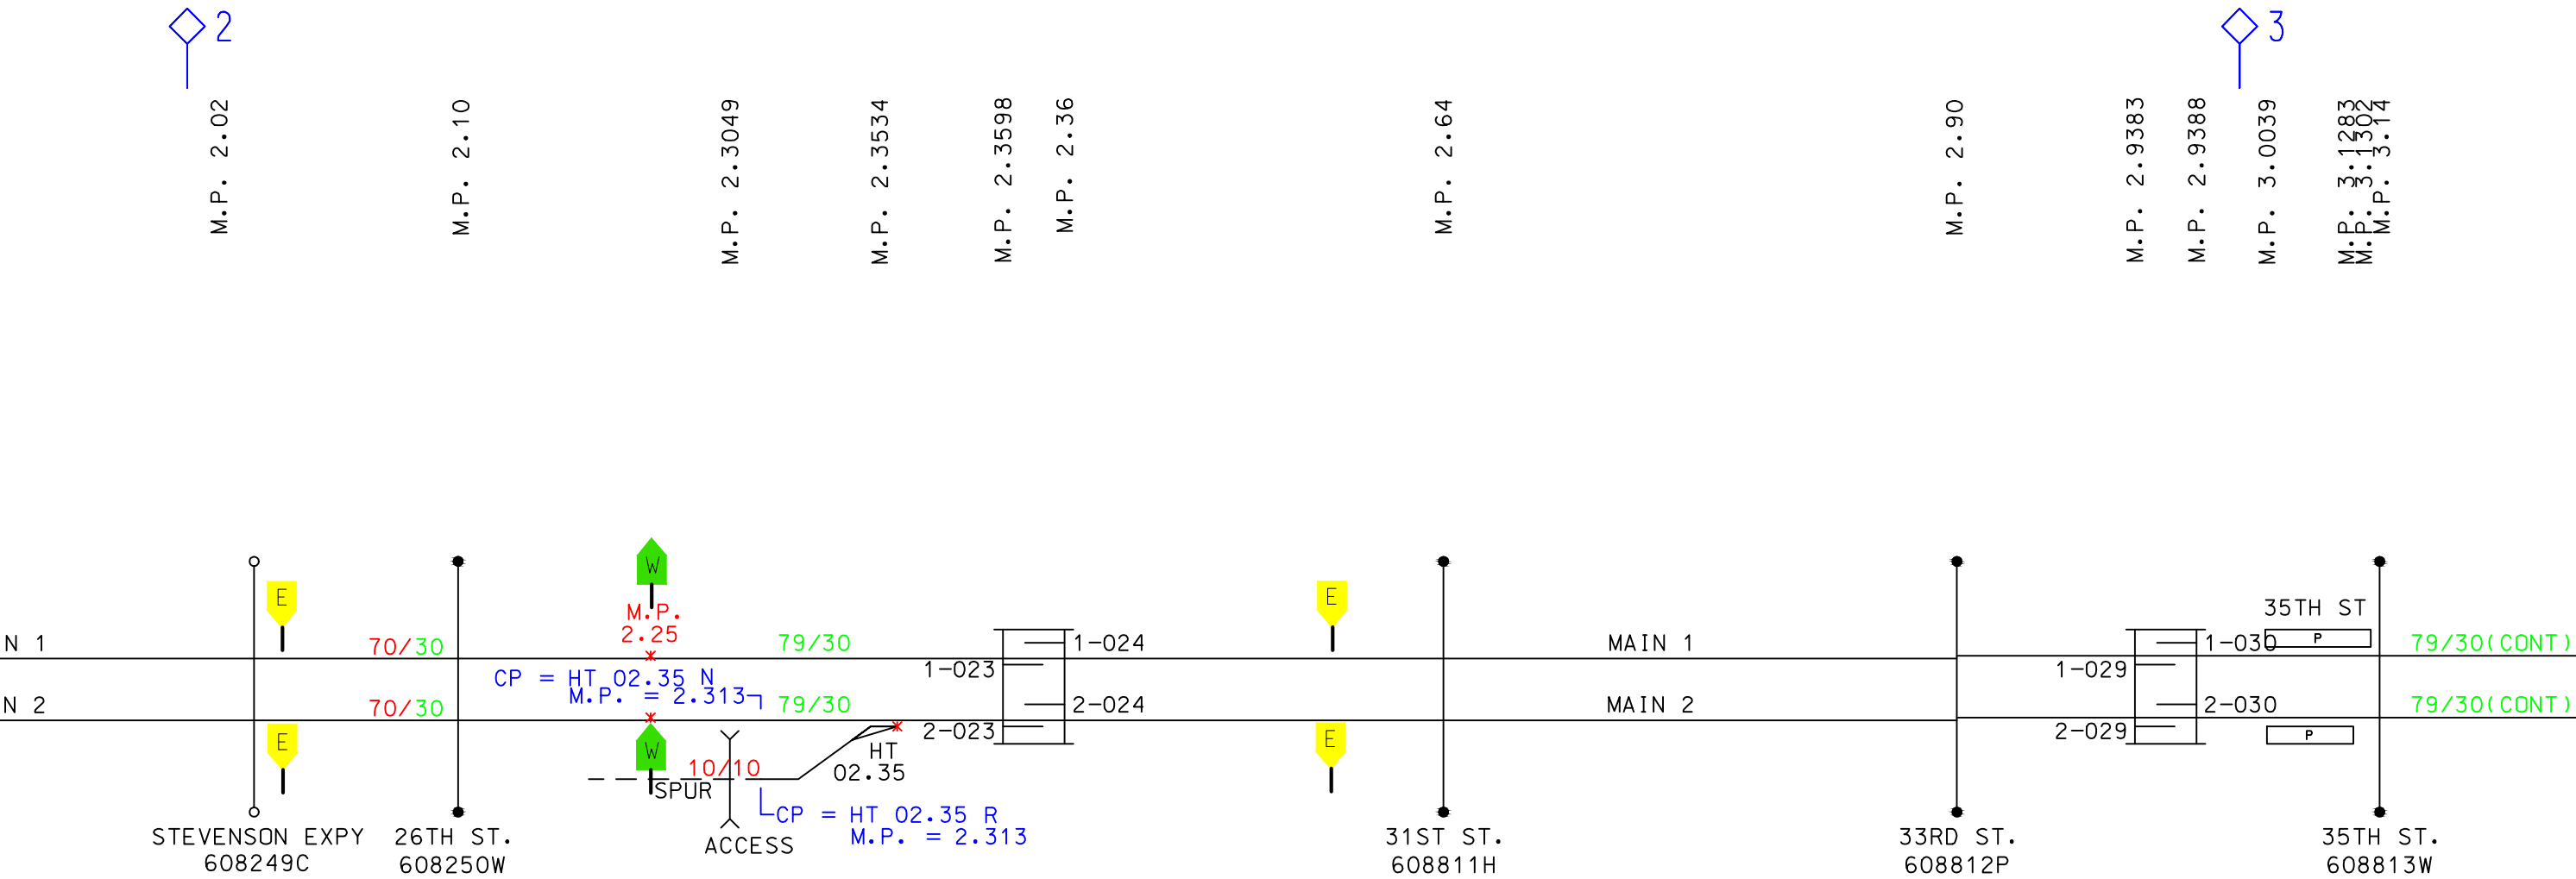

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA



DISCLOSURE:
CHARTS ARE A VISUAL REPRESENTATION OF
THE SUBDIV AND ARE TO BE USED FOR PTC
SUBDIV PURPOSES ONLY



METRA SUBDIV FILE
MASTER DRAWING
JOLIET SUB
ILLINOIS
MP 2.0 - 3.0


<----- EAST

WEST ----->

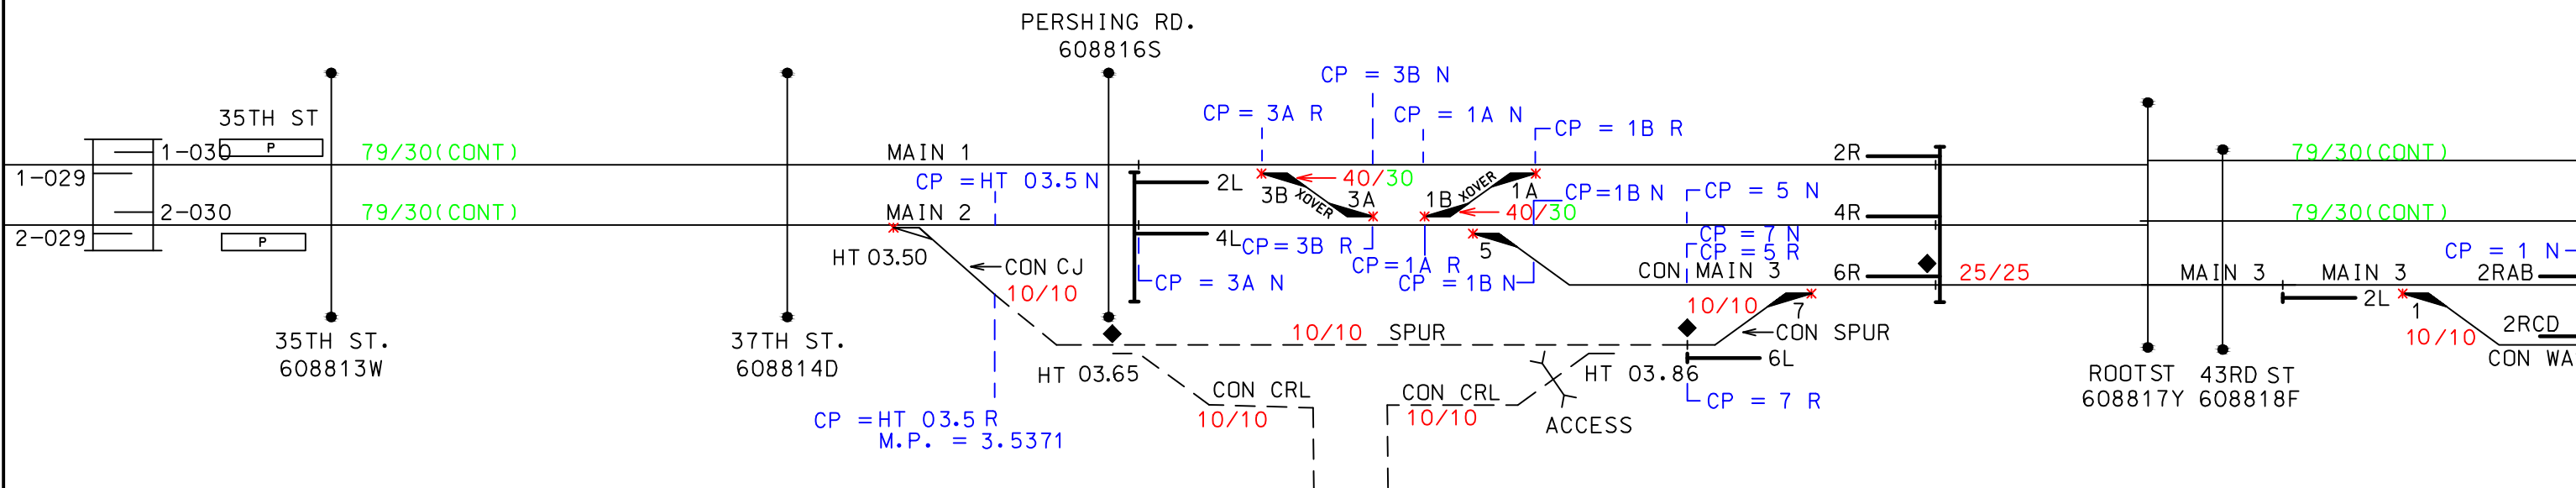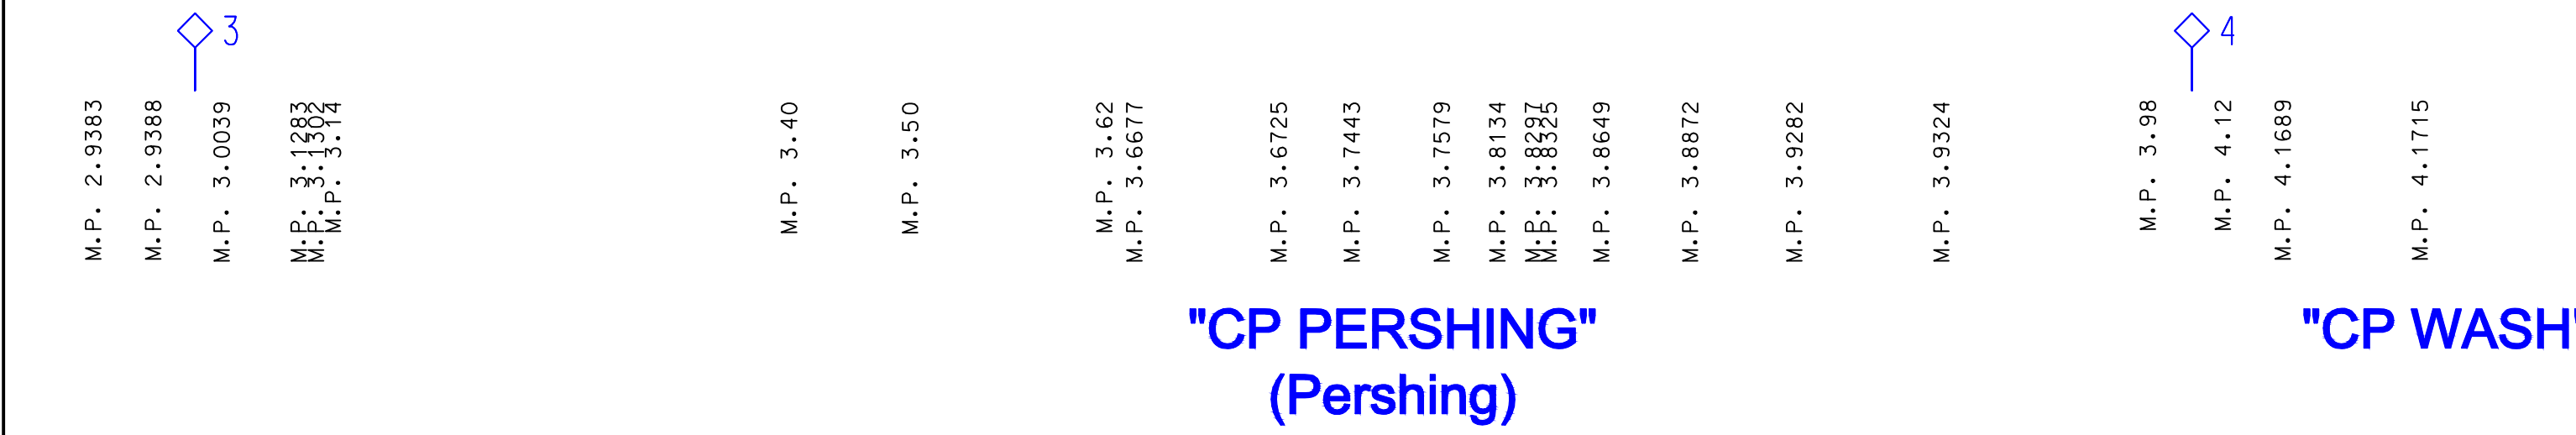


<----- EAST

WEST----->

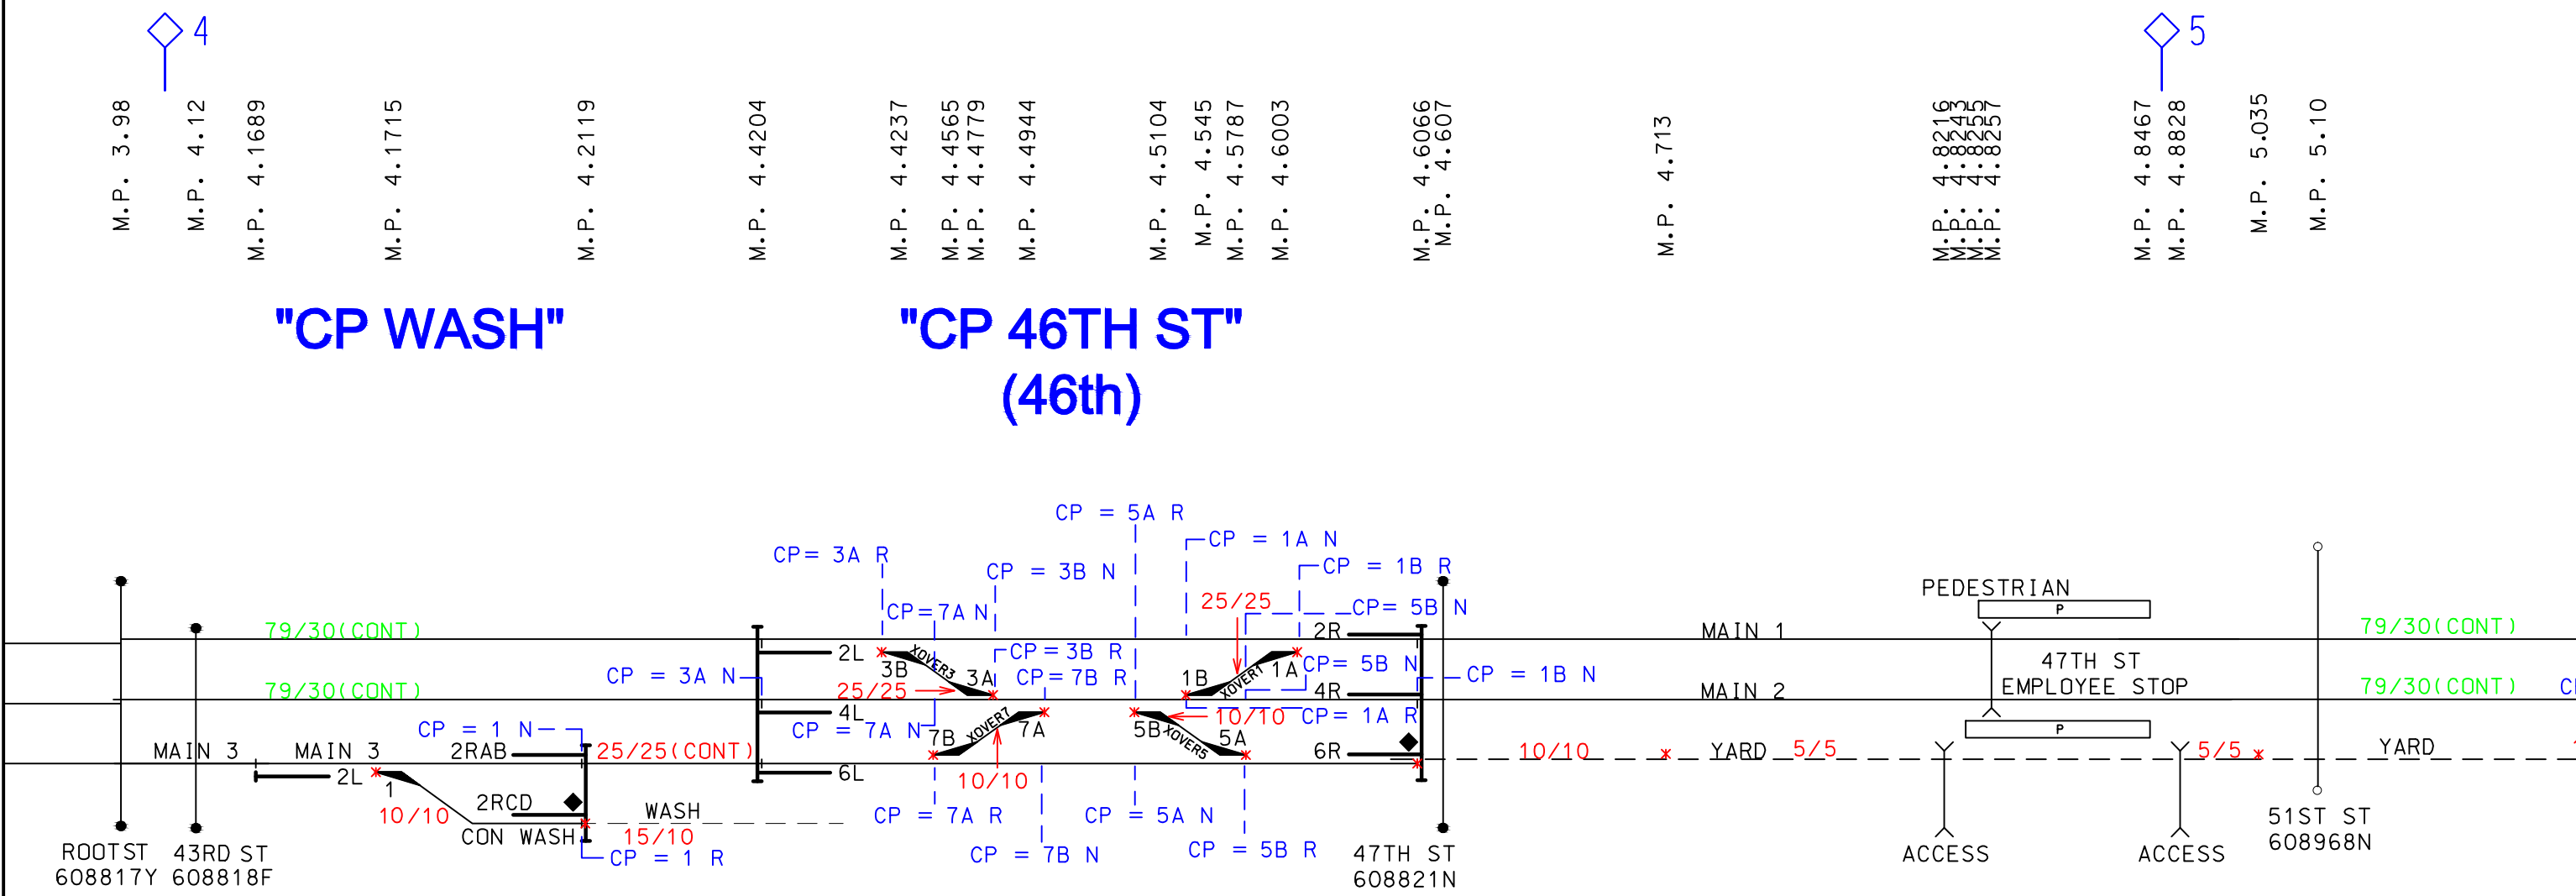


<----- EAST

WEST ----->

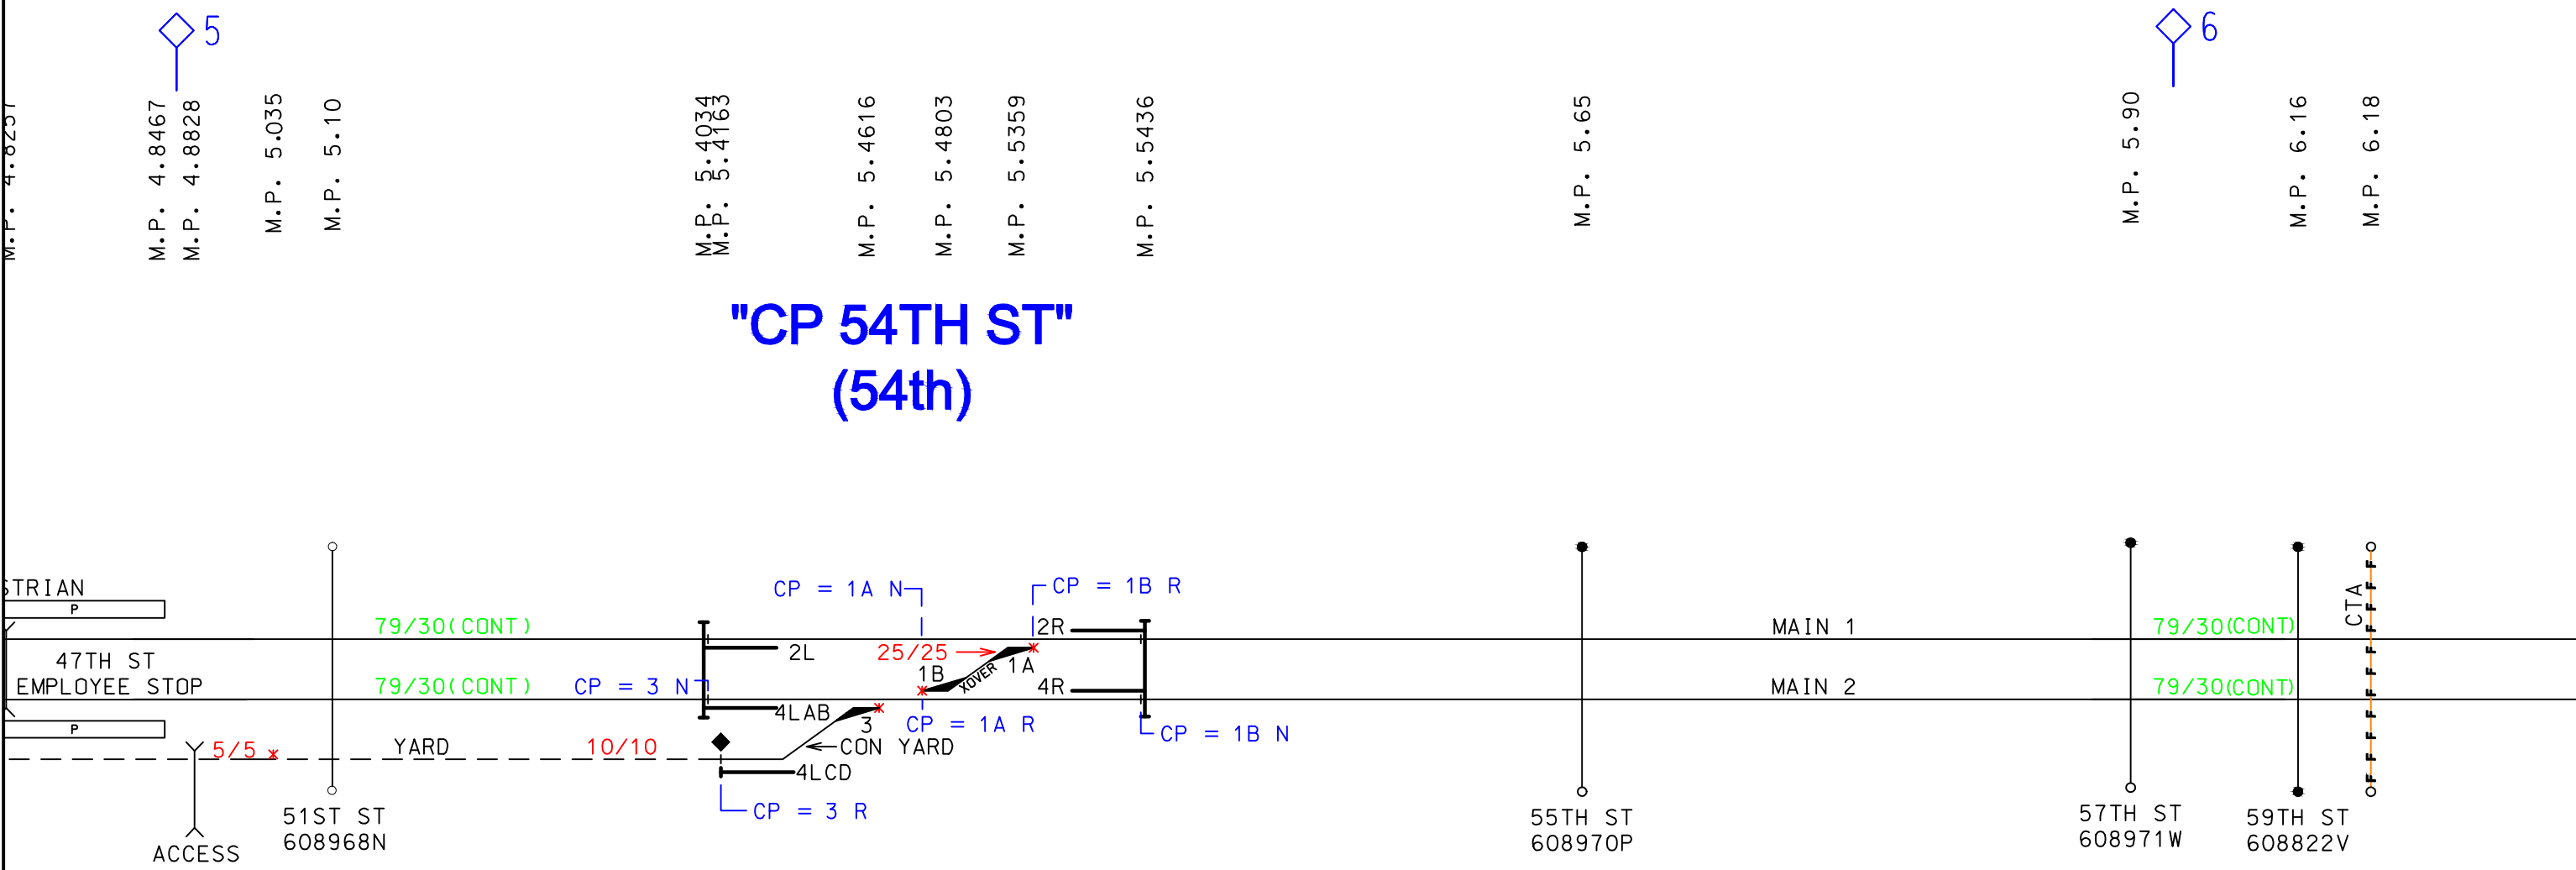


<----- EAST


WEST ----->

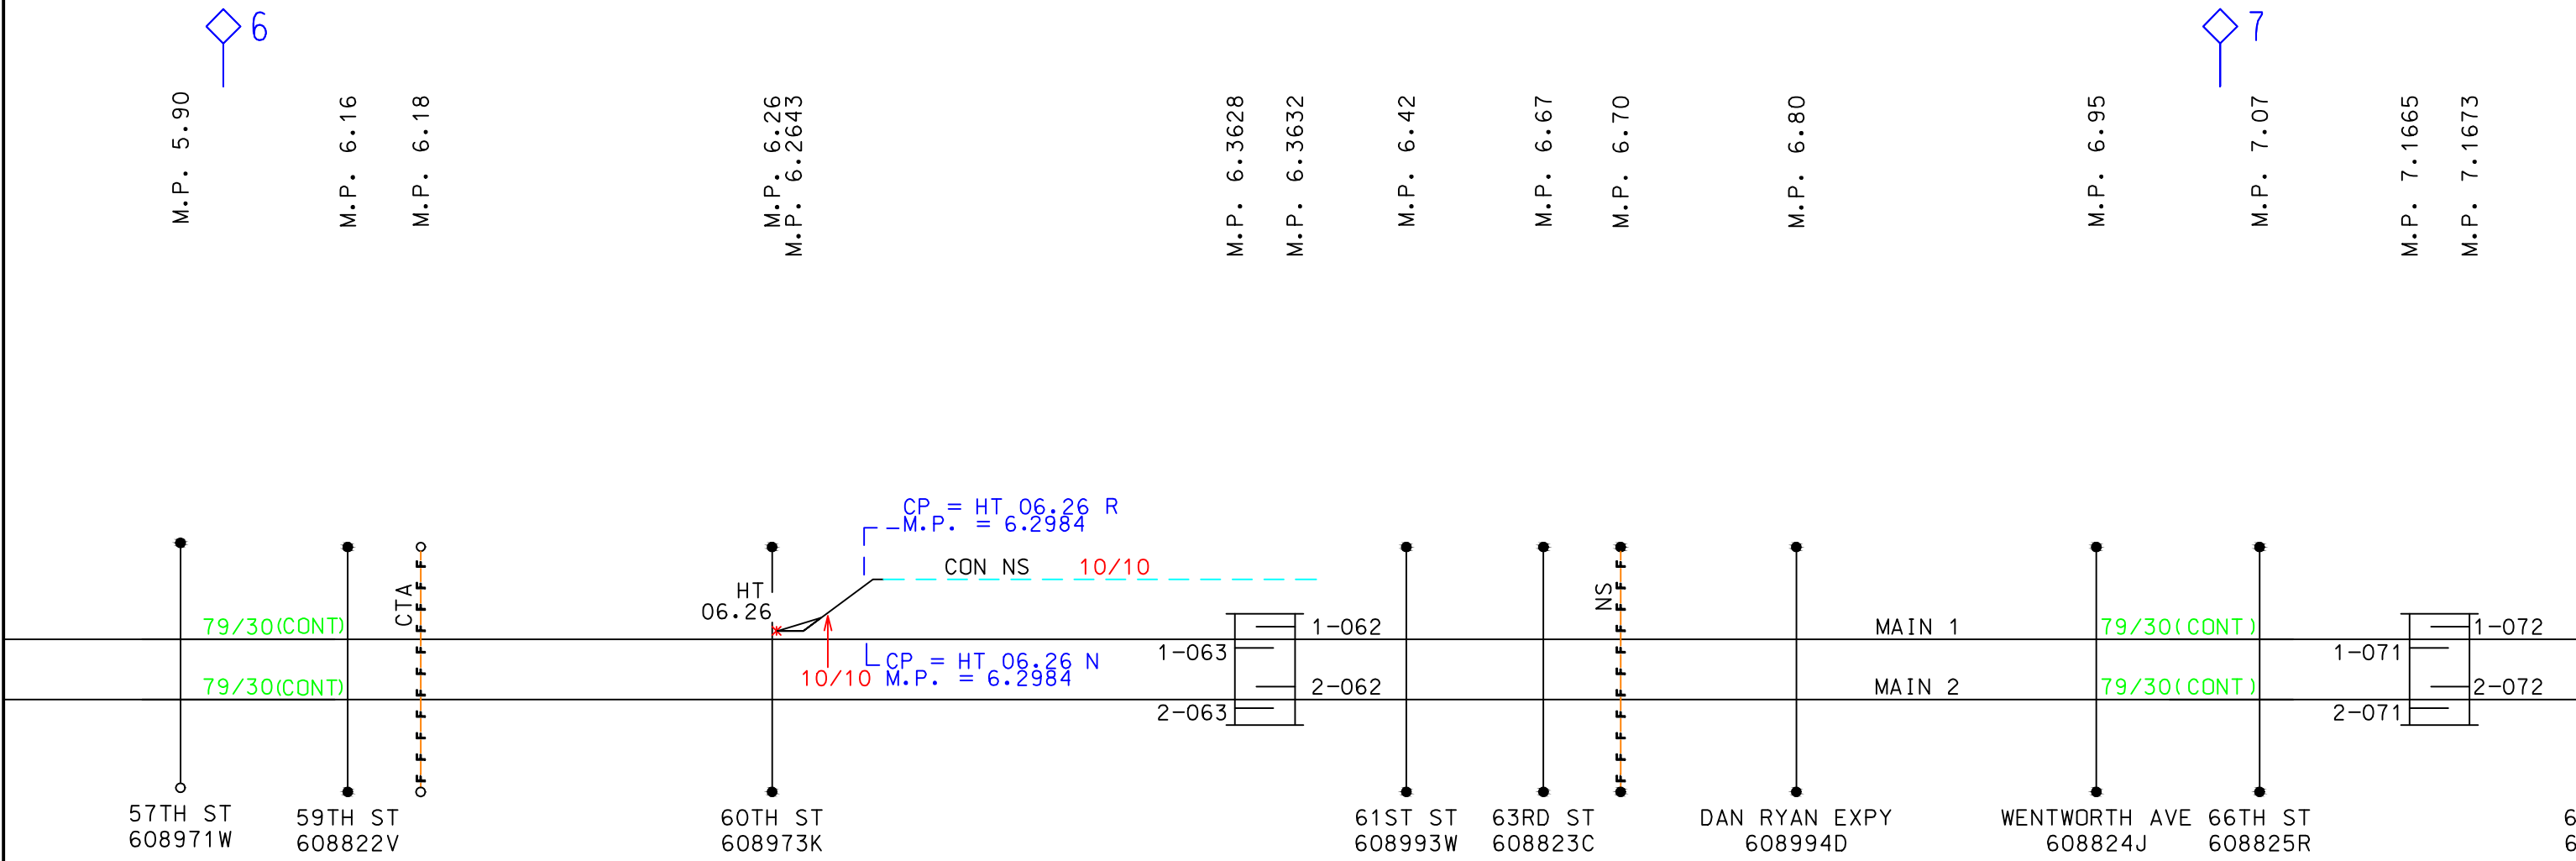


<-----EAST

WEST----->

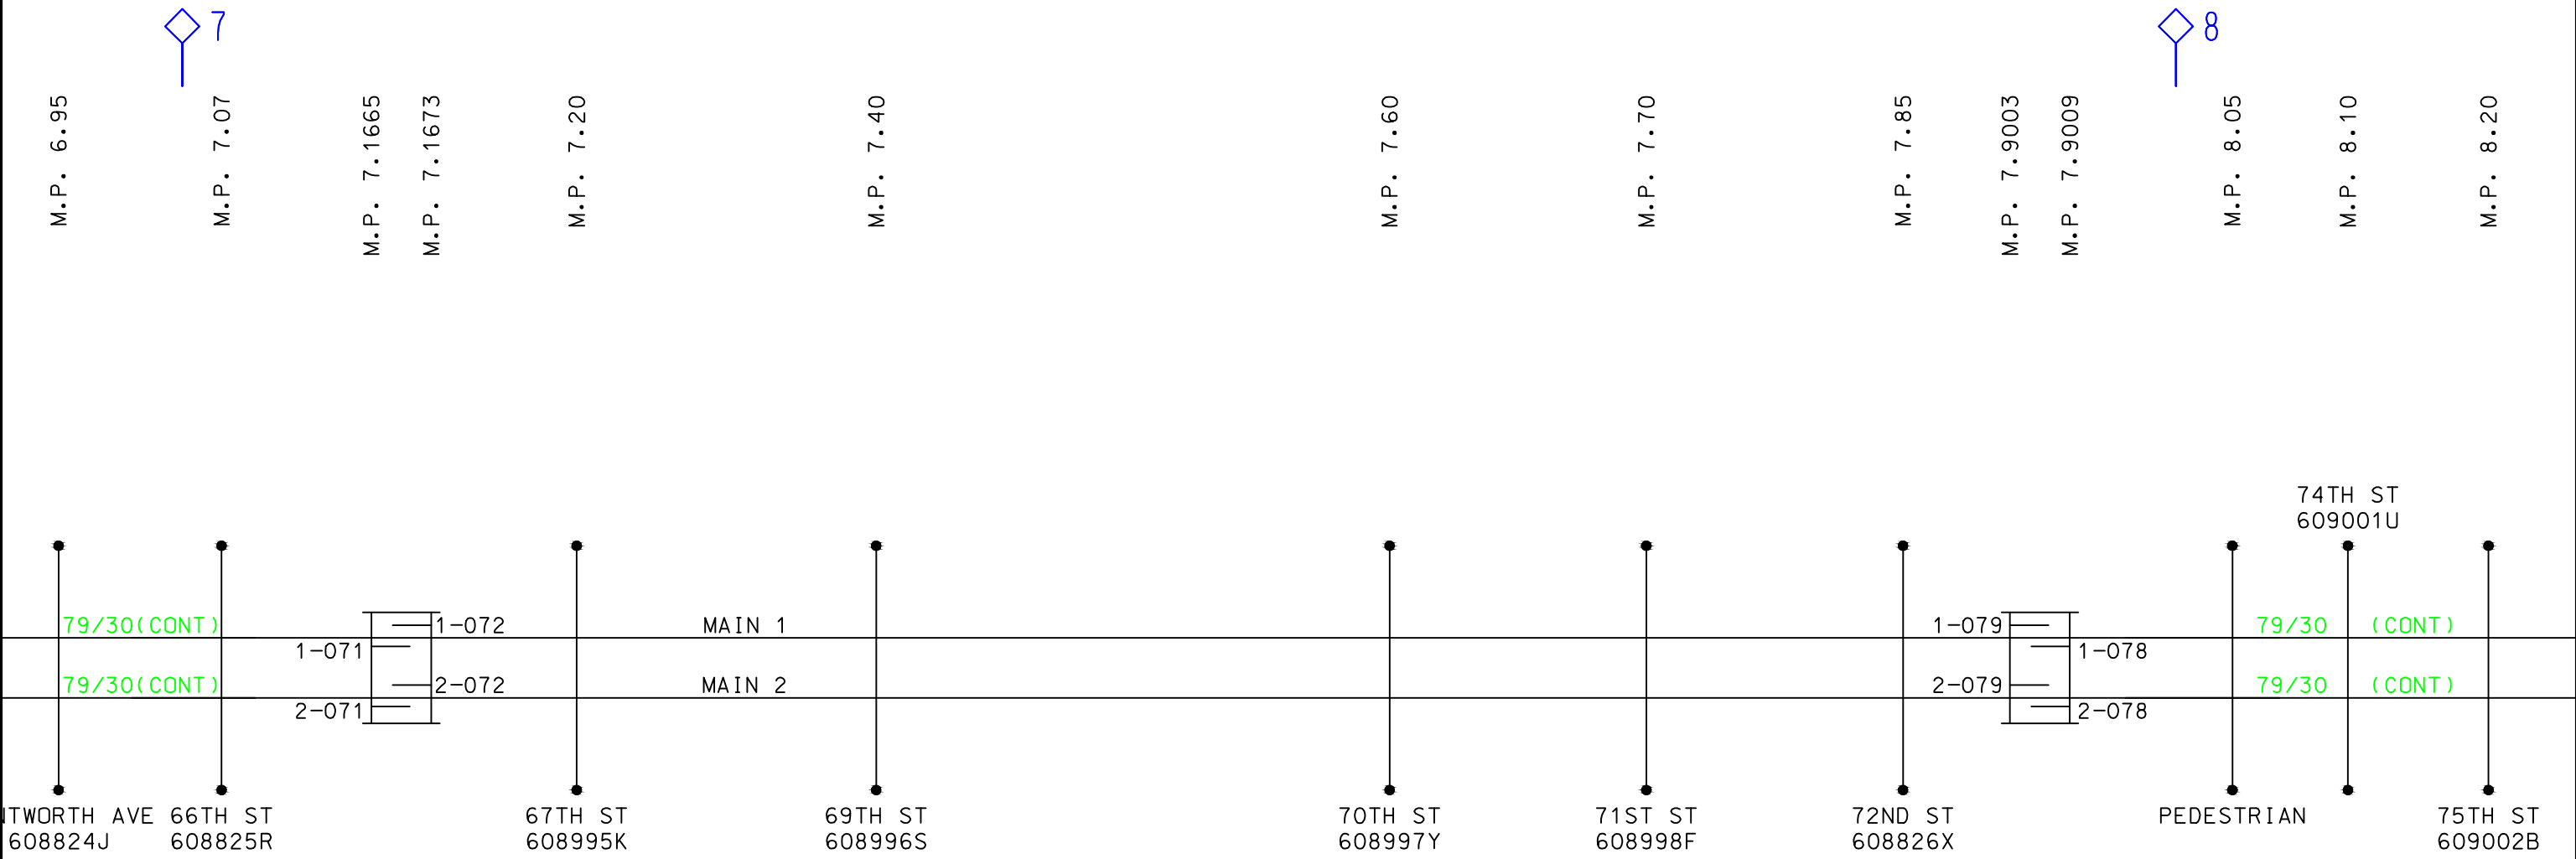

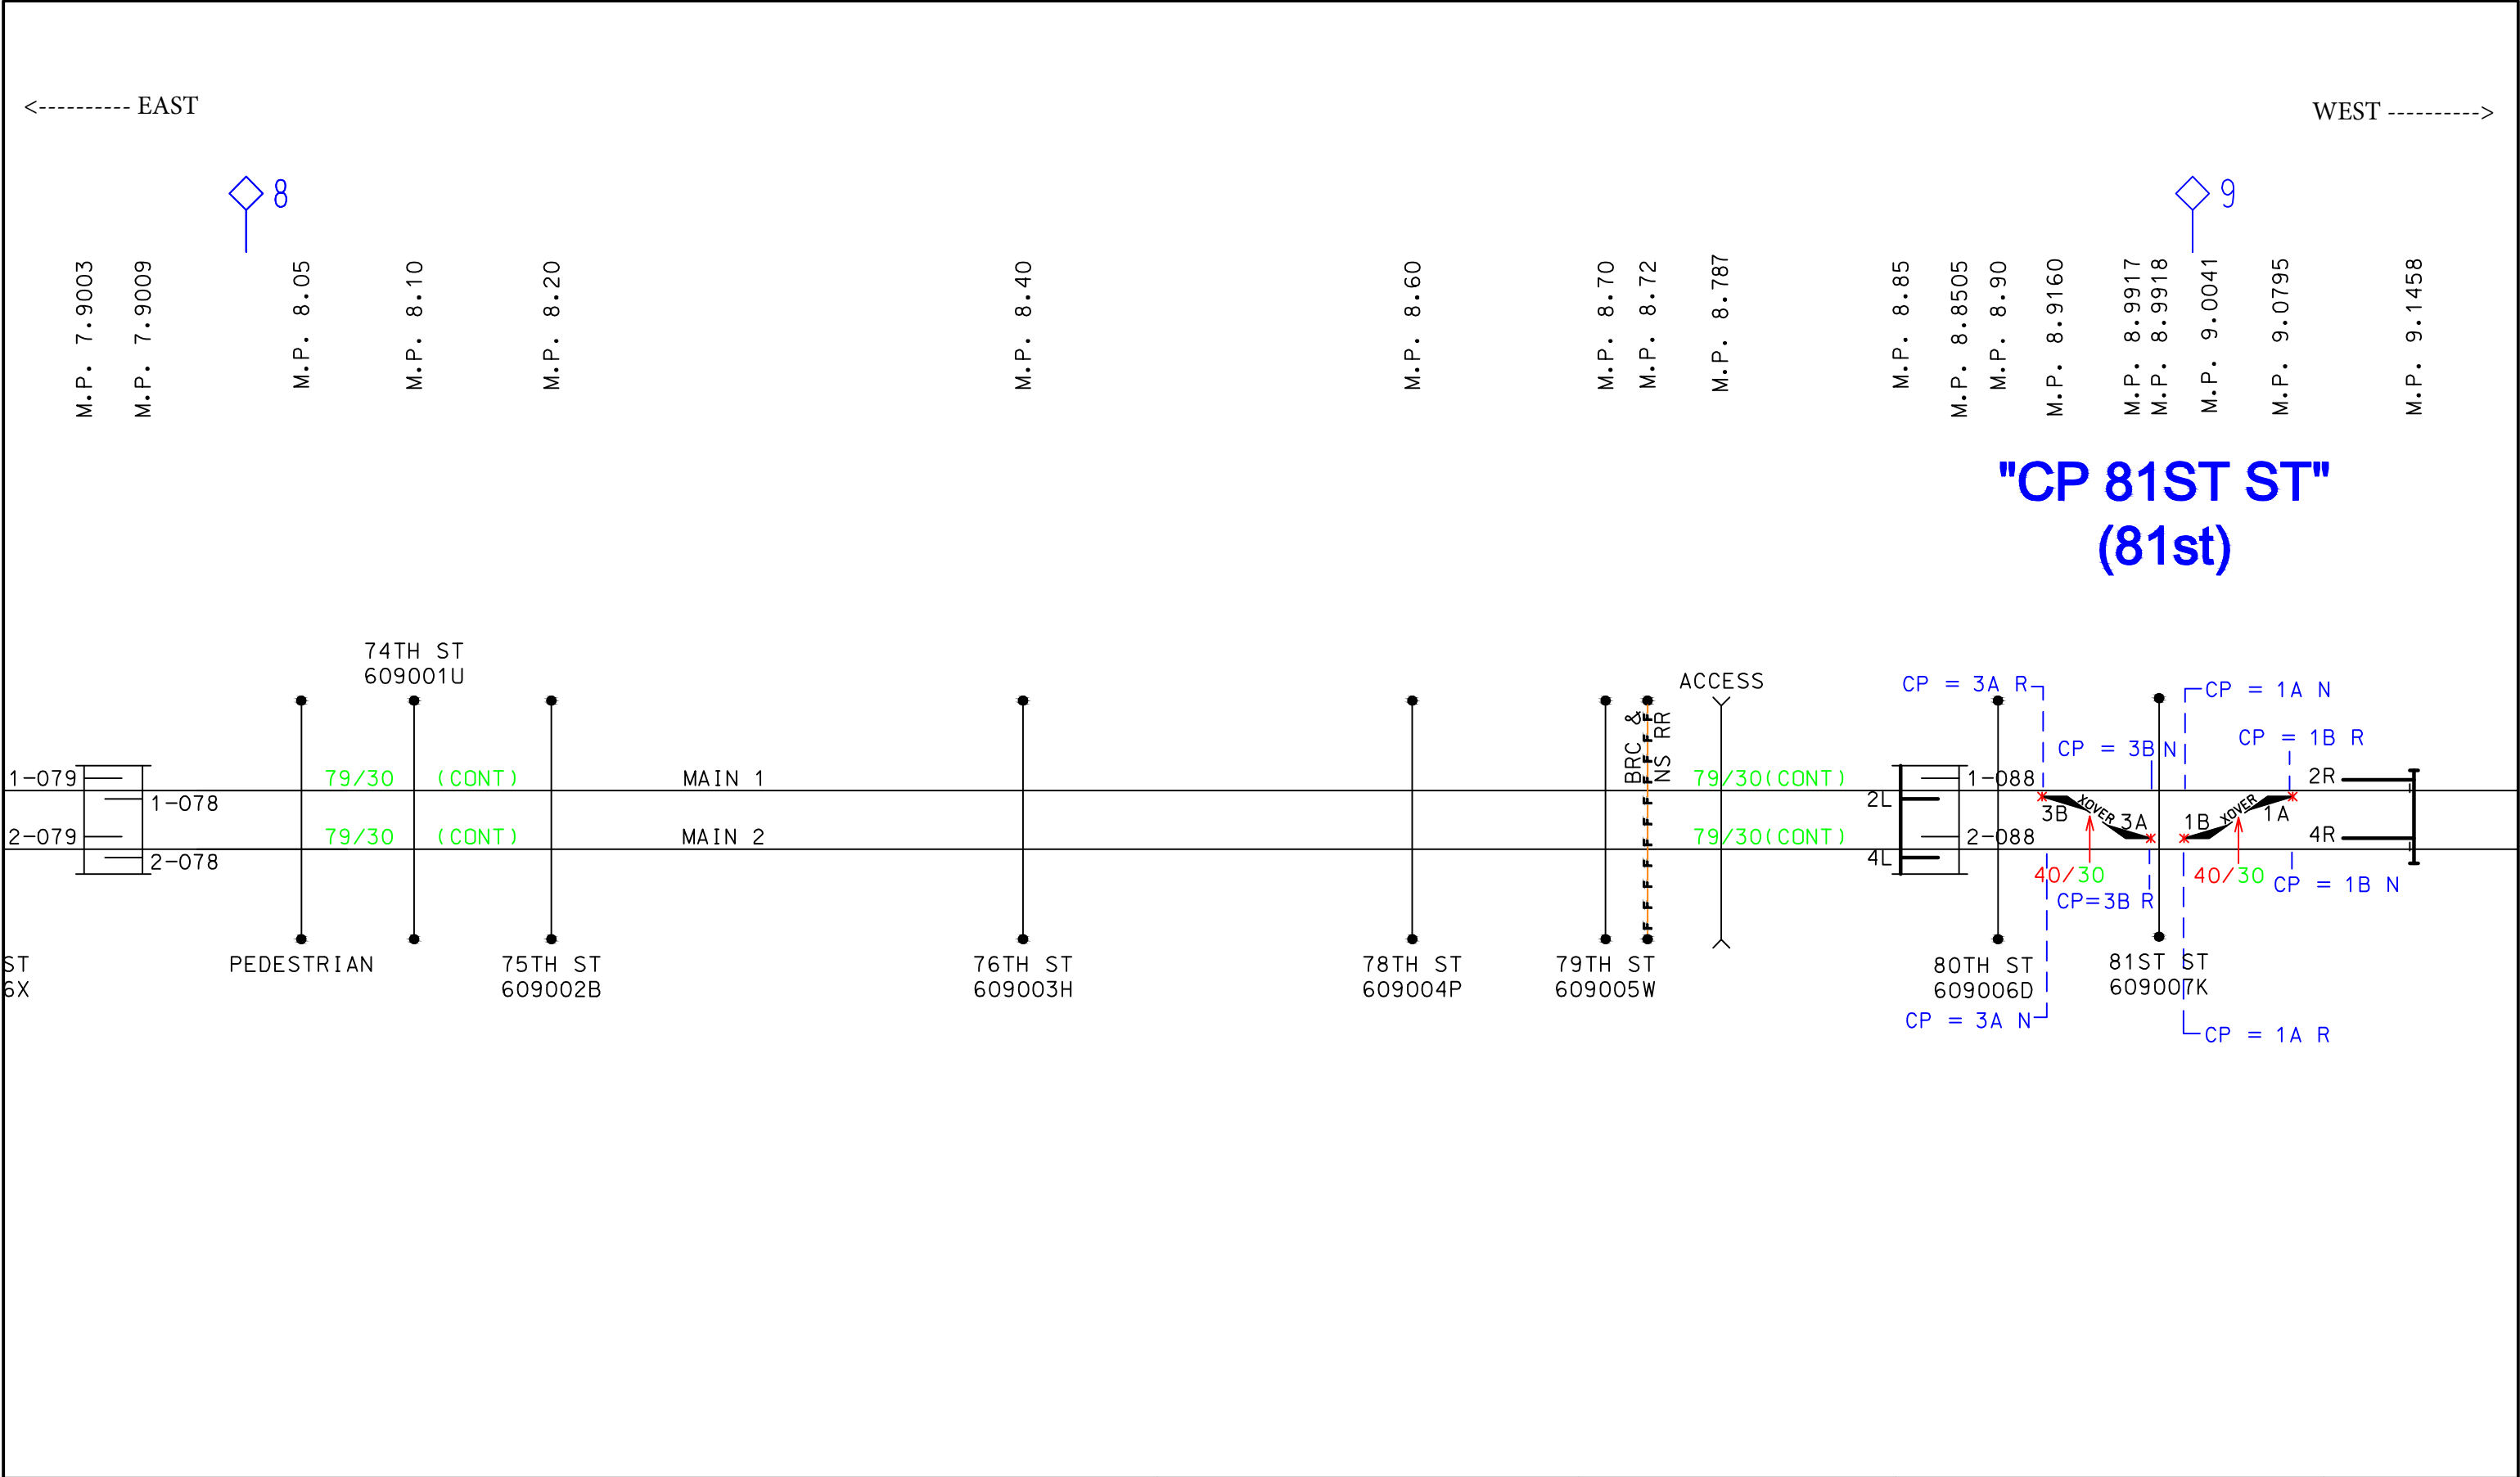

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	Metra 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS MP 8.0 - 9.0	SHEET NO. 9
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CONISCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA				

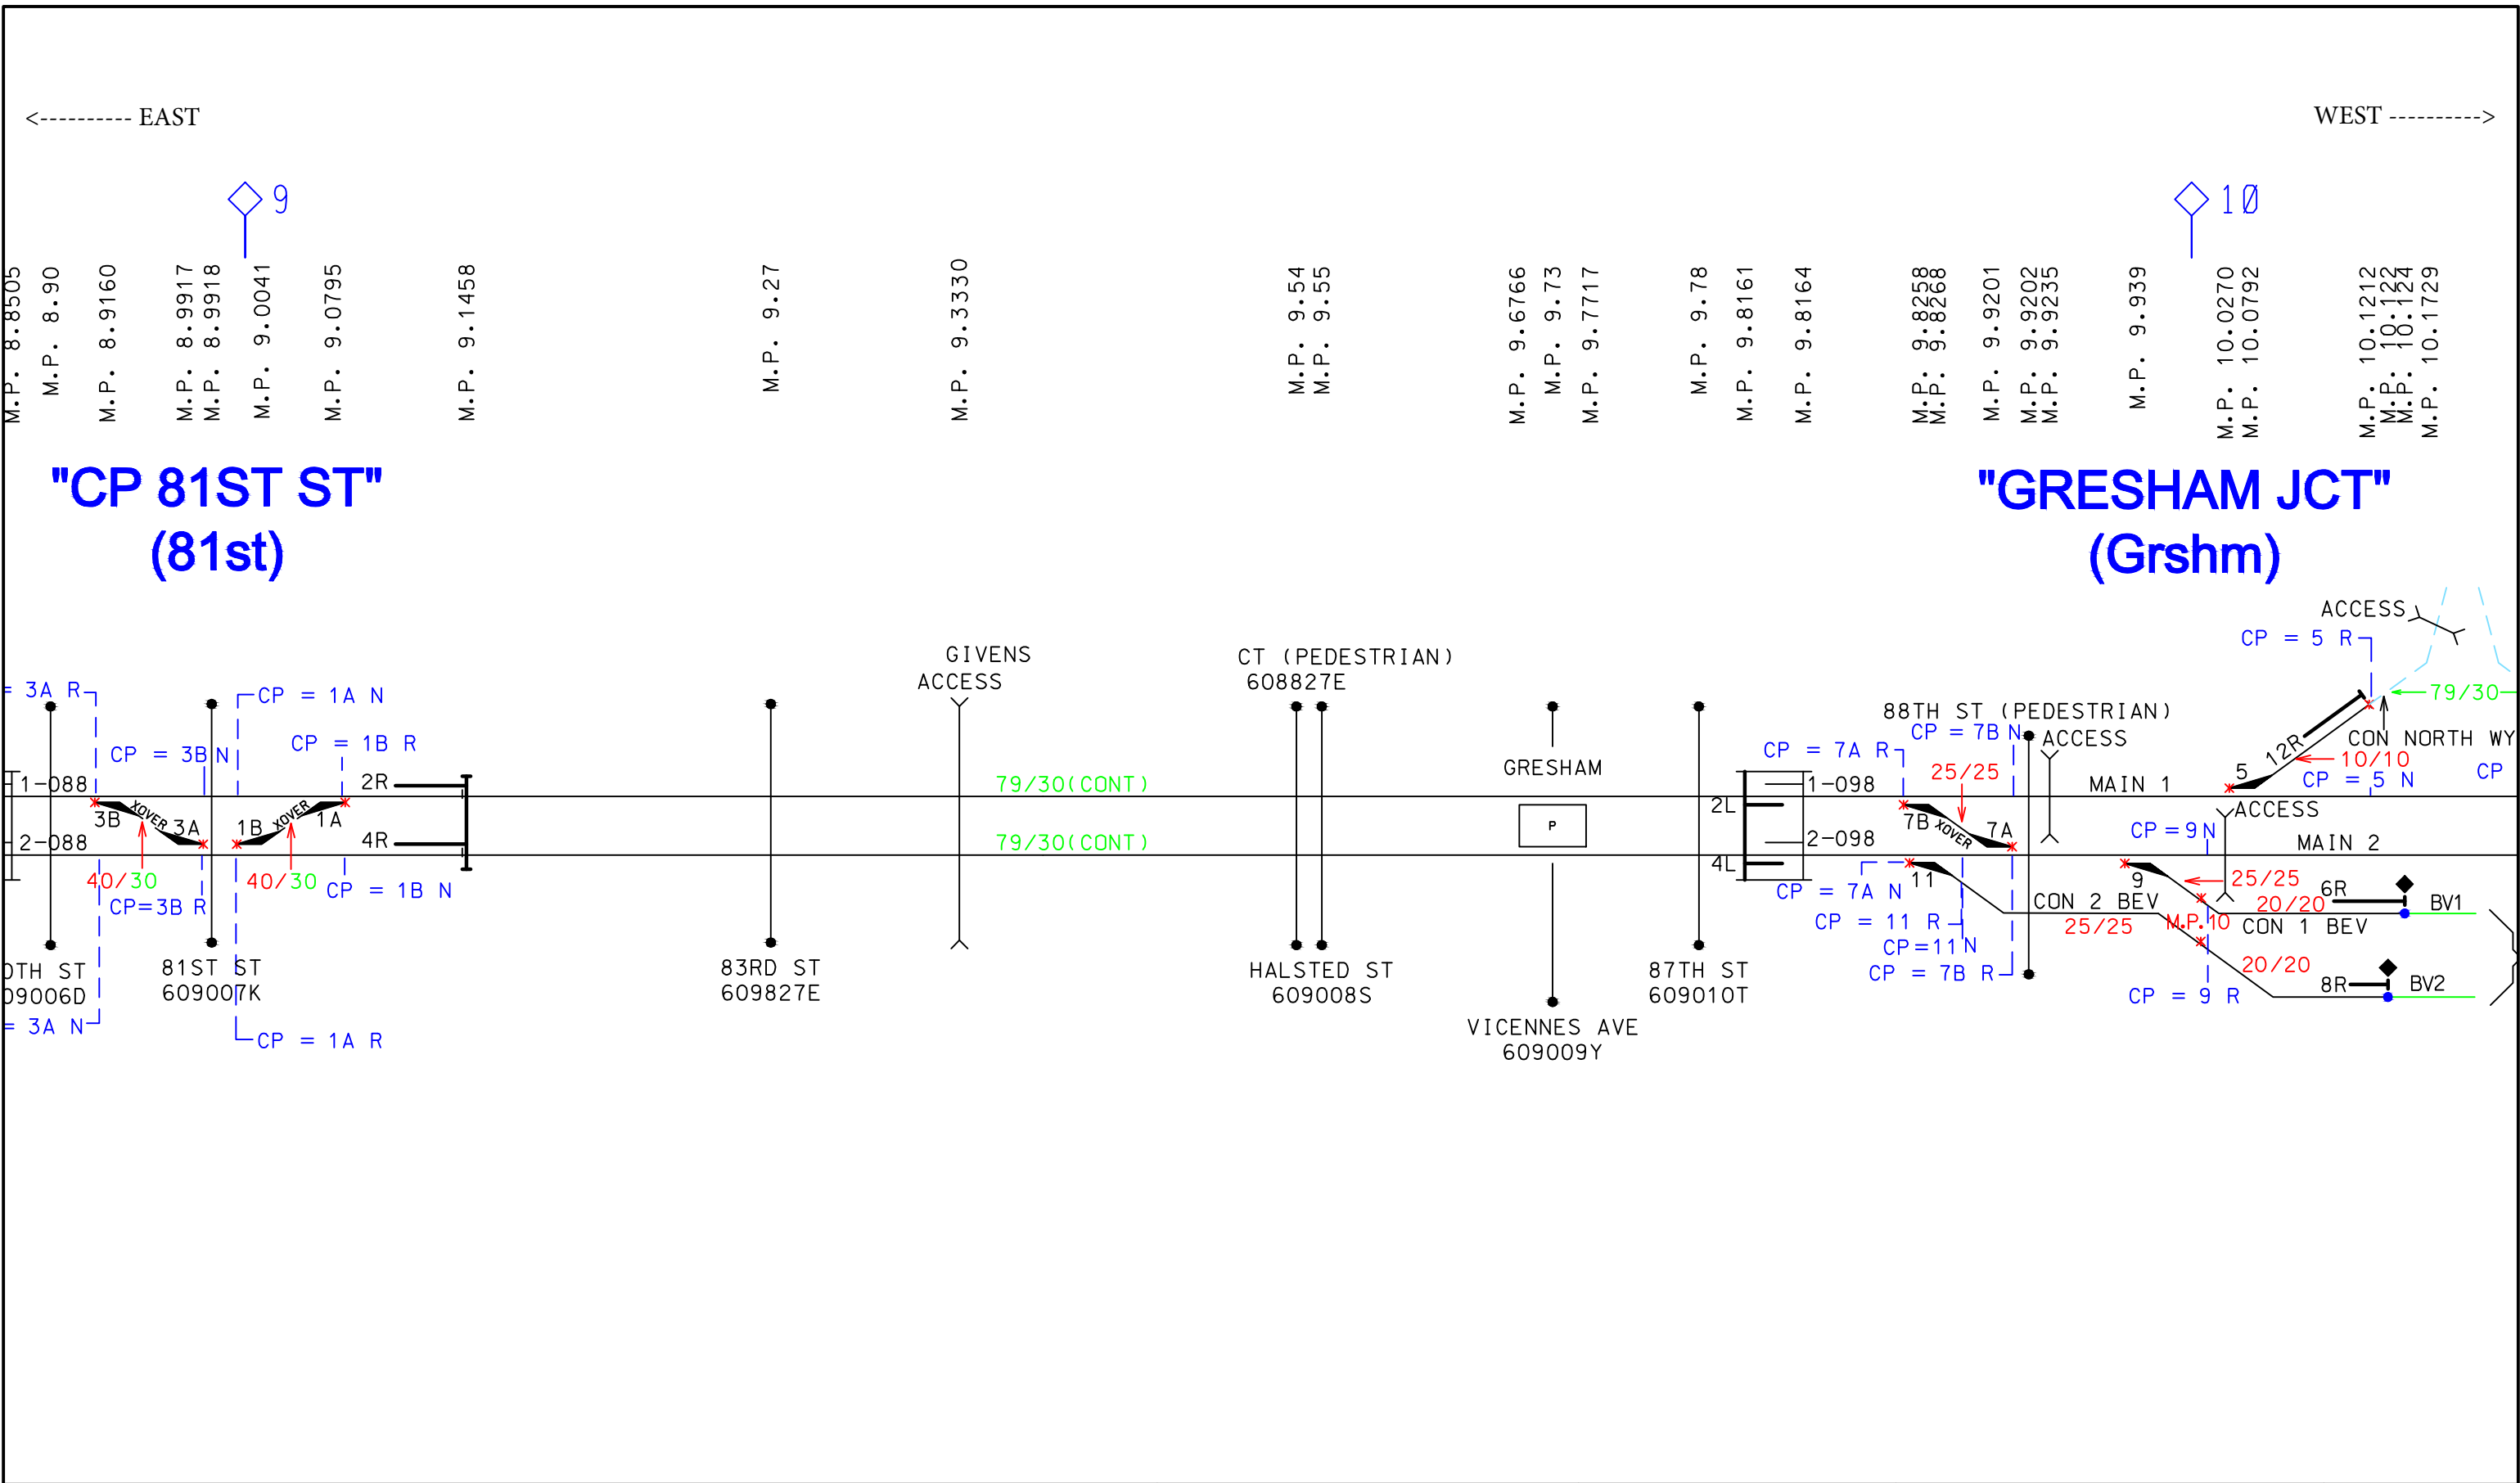

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB, ILLINOIS M.P. 9.0 - 10.0	SHEET NO. 10
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJ				

<----- EAST

WEST ----->

M.P. 9.8161

M.P. 9.8164

M.P. 9.8258

M.P. 9.8268

M.P. 9.9201

M.P. 9.9202

M.P. 9.9235

M.P. 9.939

M.P. 10.0270

M.P. 10.0792

M.P. 10.1212

M.P. 10.122

M.P. 10.124

M.P. 10.1729

M.P. 10.29

M.P. 10.3951

M.P. 10.4308

M.P. 10.4834

M.P. 10.4971

M.P. 10.4978

M.P. 10.805

M.P. 10.838

M.P. 10.8390


M.P. 10.8612

M.P. 10.8822

10


11

"GRESHAM JCT"
(Grshm)

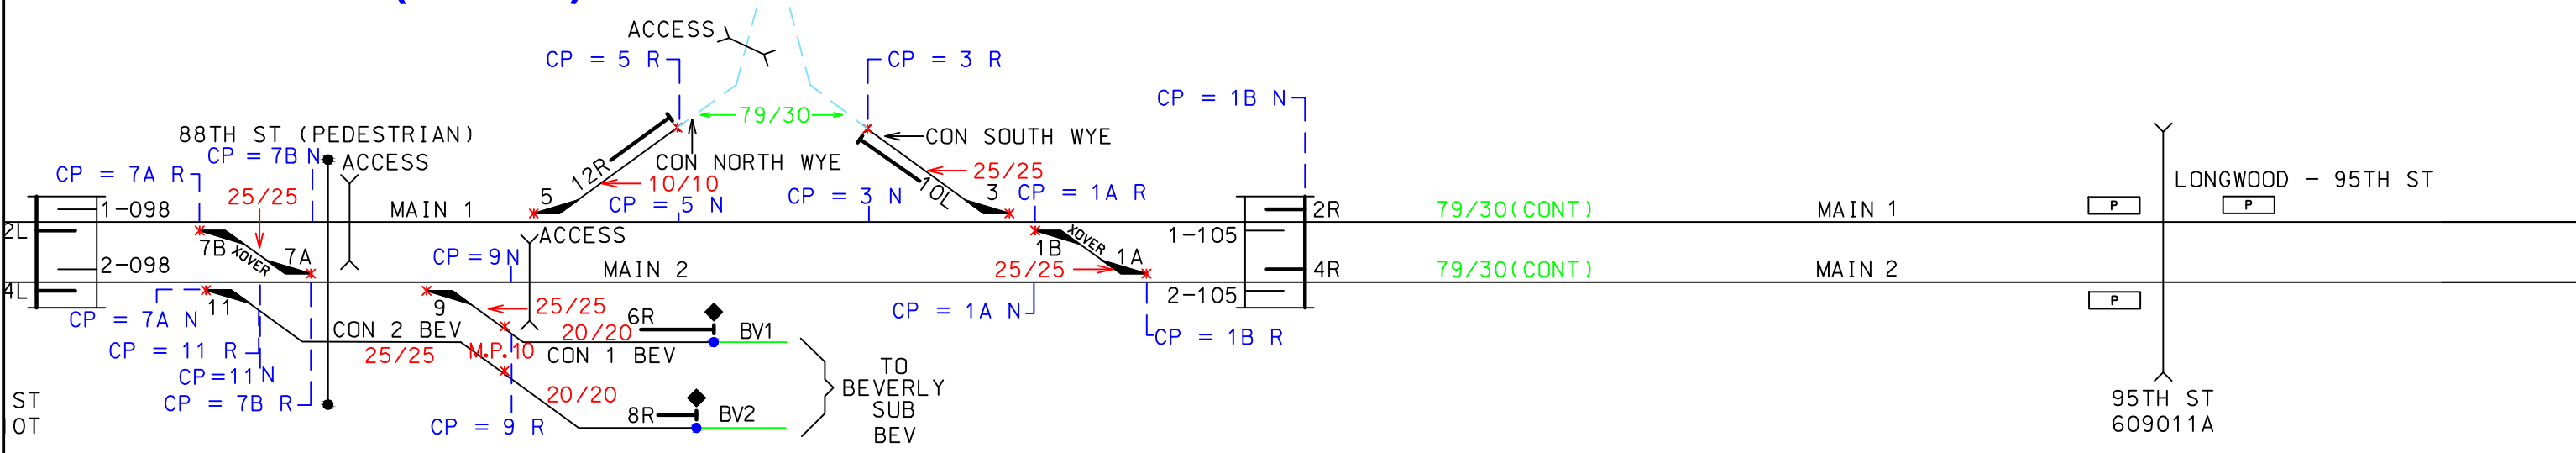

<----- EAST

WEST ----->



M.P. 10.8822

M.P. 11.1365

M.P. 11.3596

M.P. 11.3616

M.P. 11.7966

M.P. 11.9122

M.P. 11.9749
M.P. 11.975
M.P. 11.9753

M.P. 12.035
M.P. 12.037
M.P. 12.0375
M.P. 12.0453

OD - 95TH ST

1-114 1-113

MAIN 1 79/30 (CONT)

2-114 2-113


MAIN 2 79/30 (CONT)

97TH ST
609012G

99TH ST
608302L

102ND ST
608303T

103RD ST
608304A




104TH ST
608305G

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA


DISCLOSURE:
CHARTS ARE A VISUAL REPRESENTATION OF
THE SUBDIV AND ARE TO BE USED FOR PTC
SUBDIV PURPOSES ONLY




METRA SUBDIV FILE
MASTER DRAWING
JOLIET SUB,
ILLINOIS
M.P. 11.0 -12.0

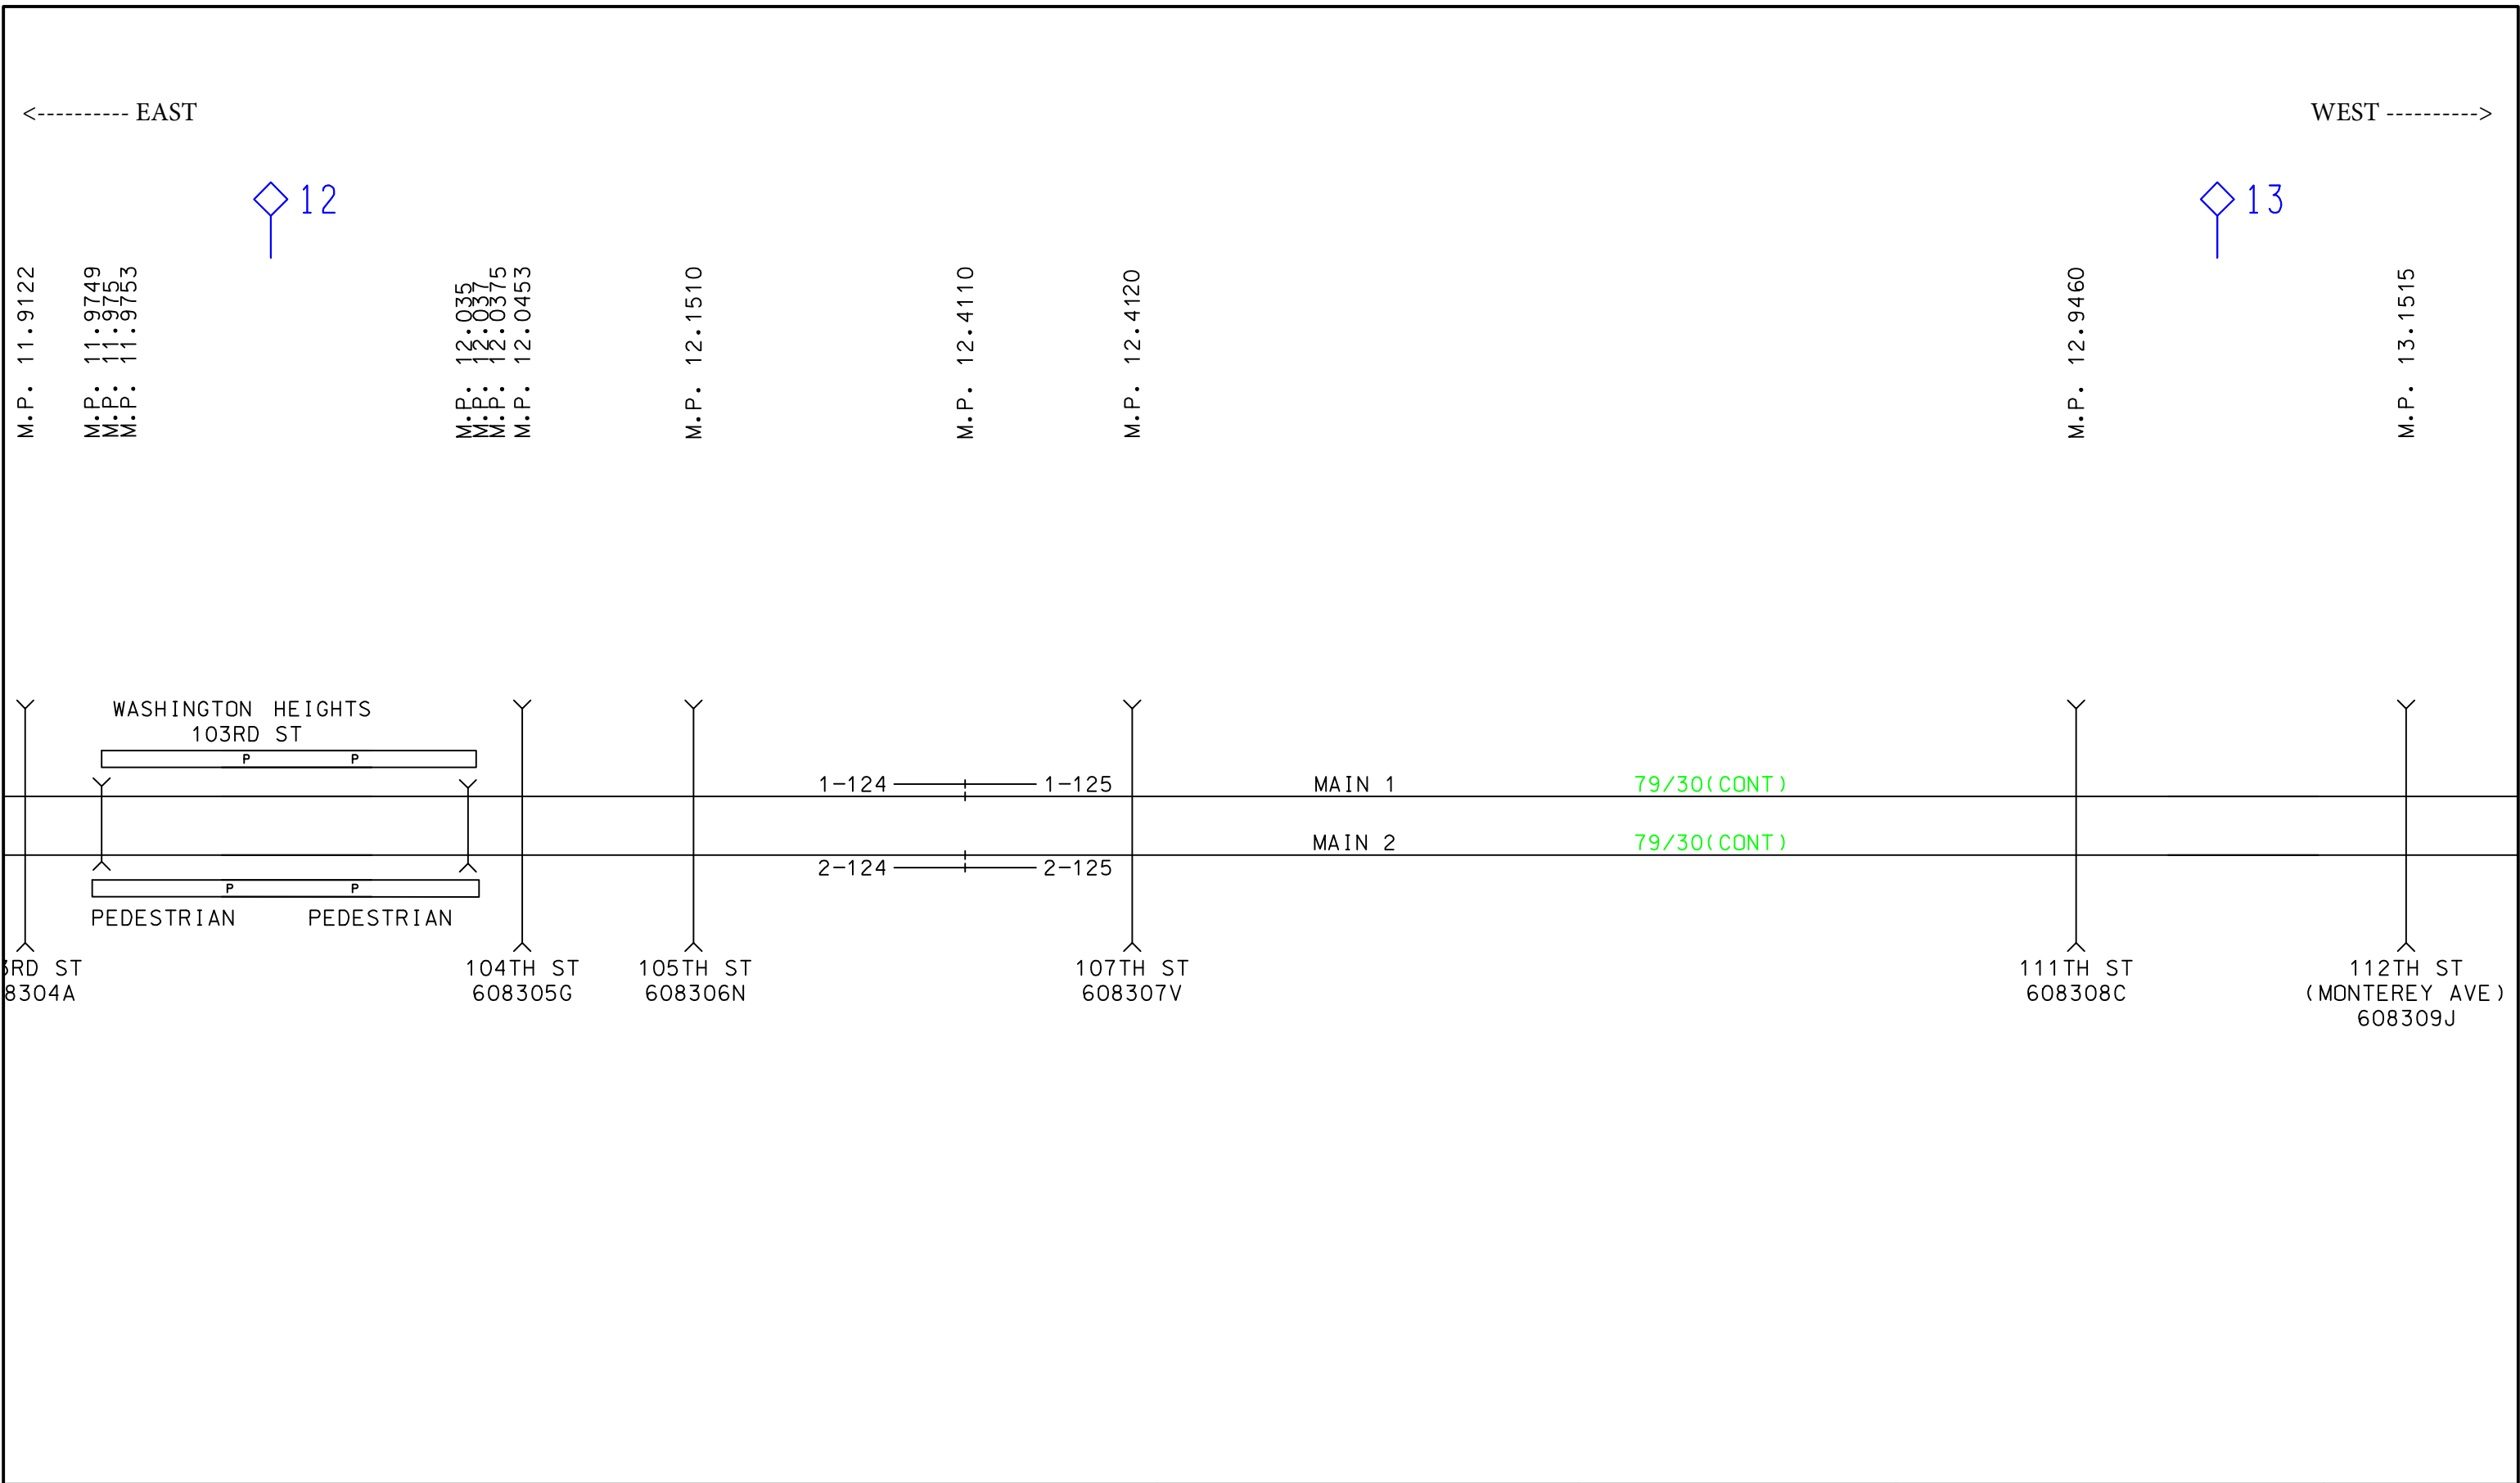


REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	Metra 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB, ILLINOIS M.P. 12.0 - 13.0	SHEET NO. 13
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA				

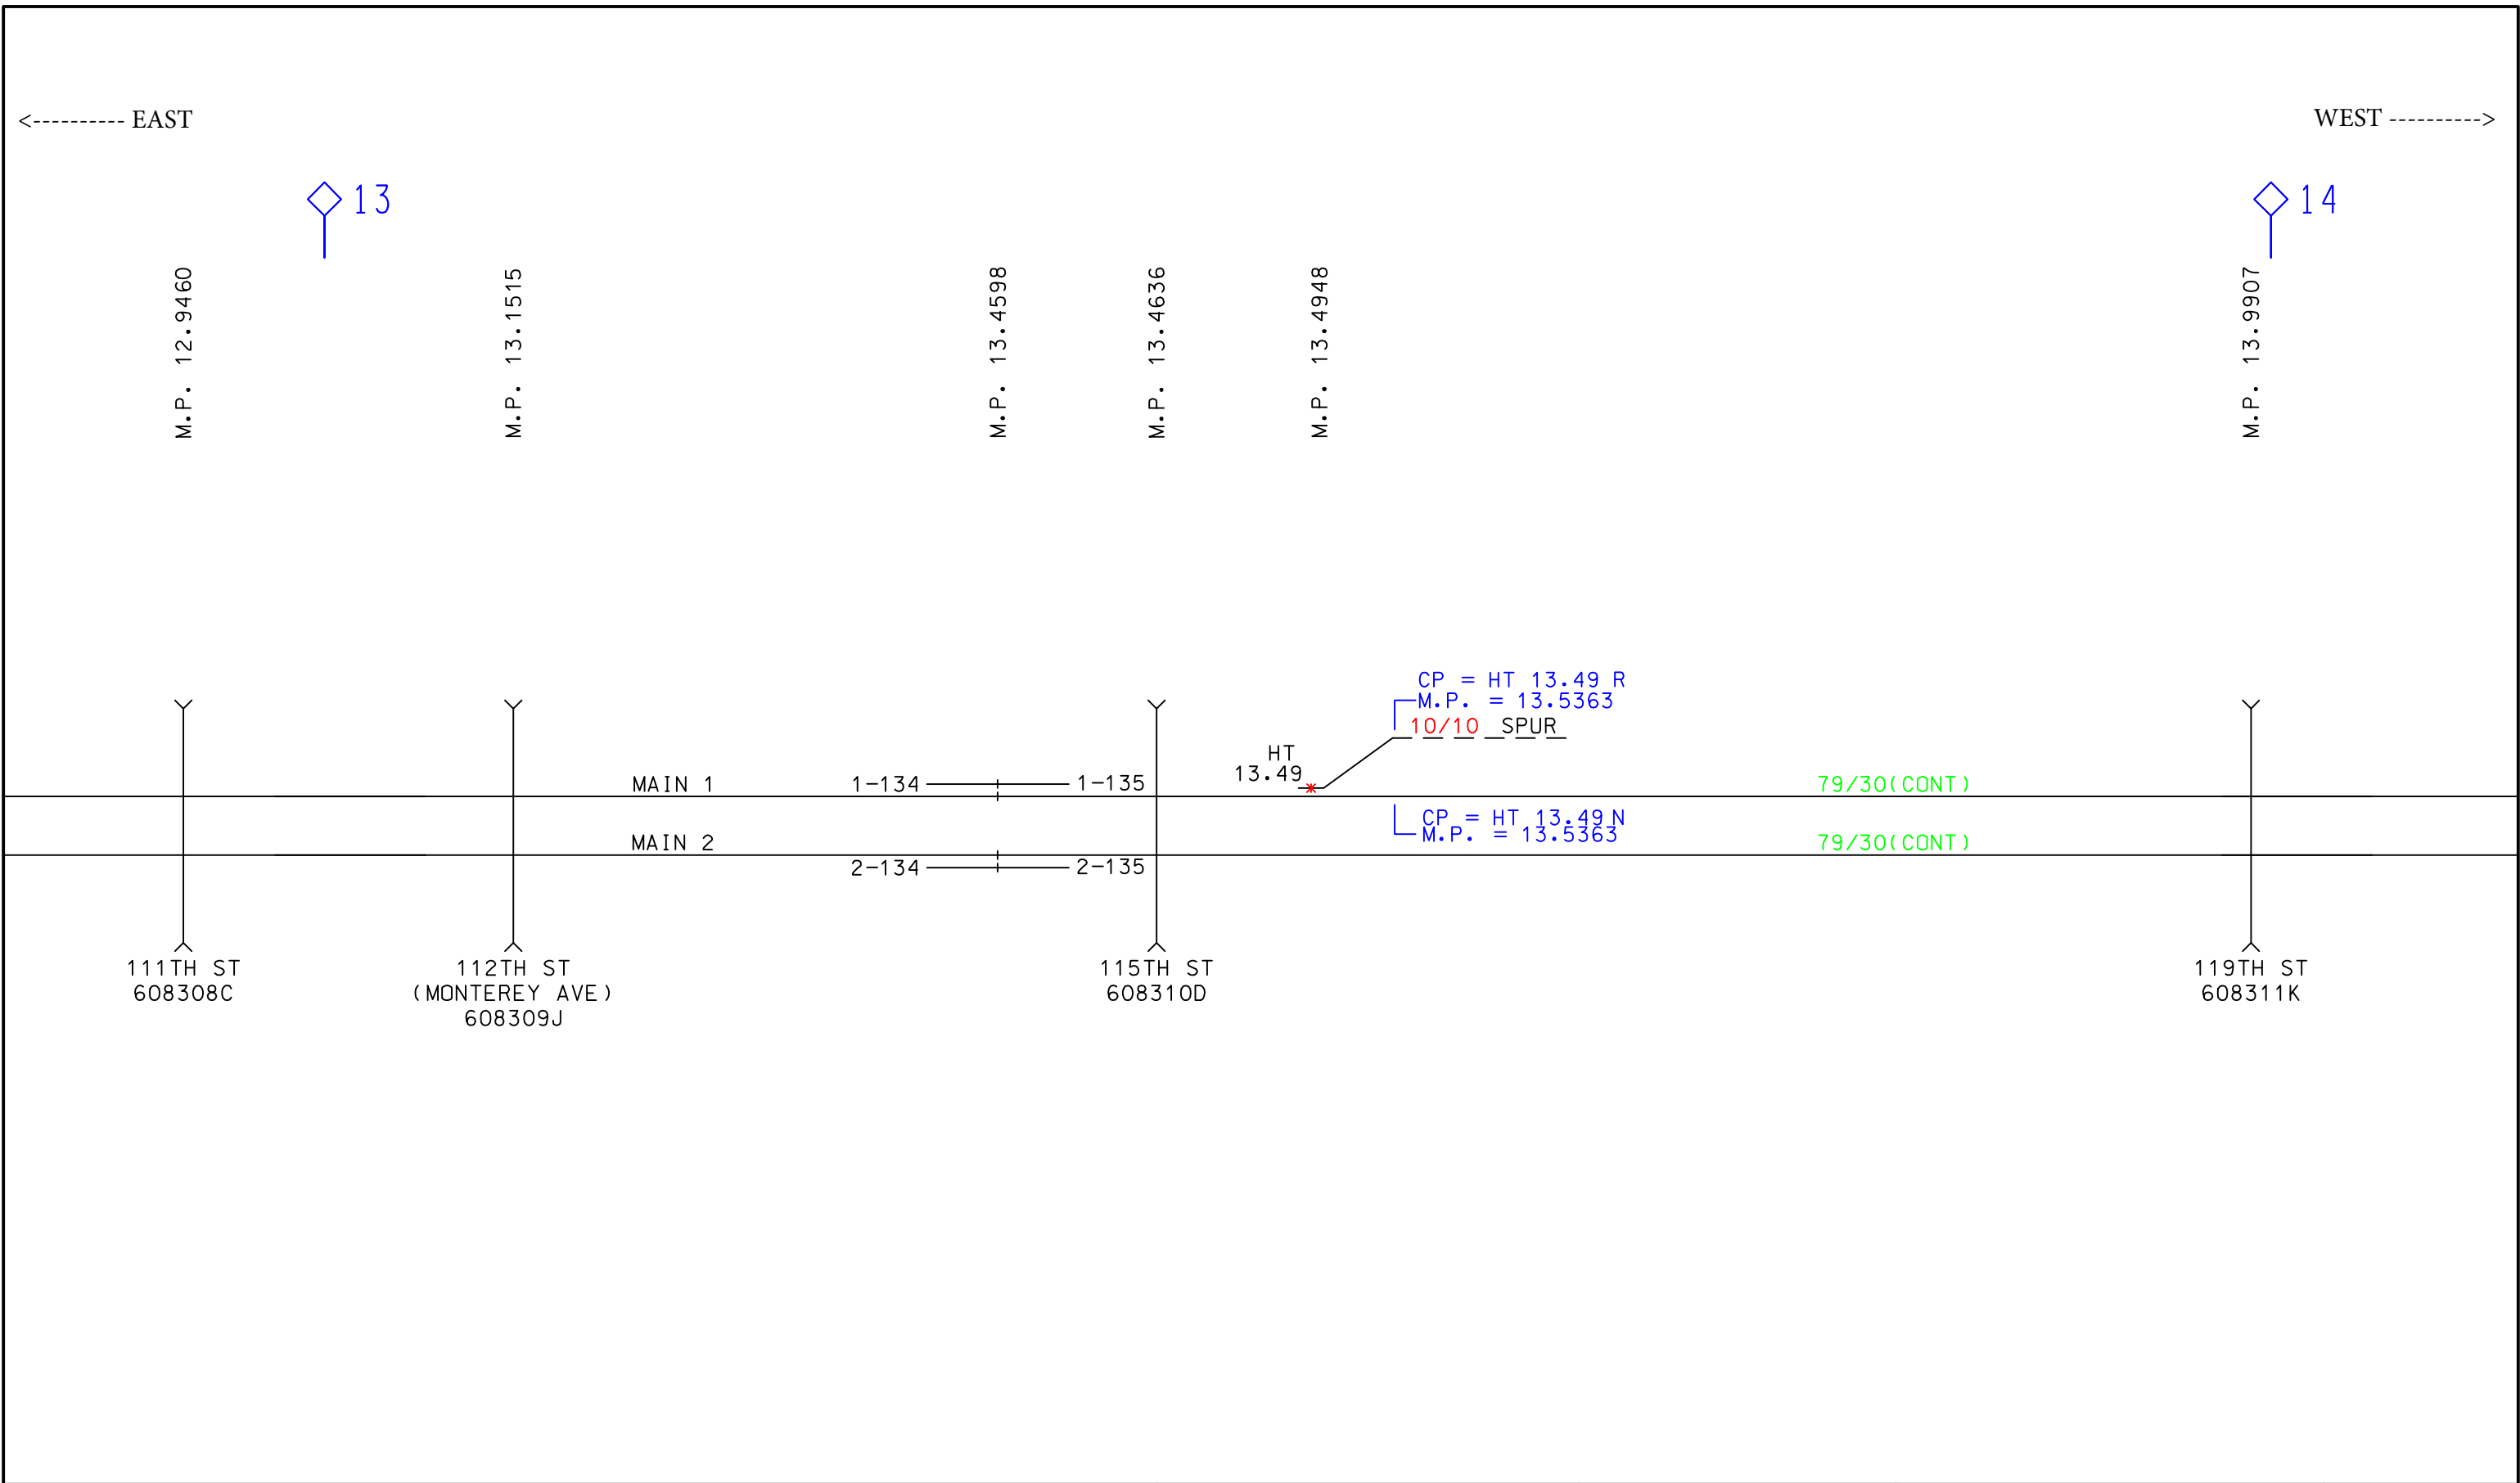


REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	Metra 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB, ILLINOIS M.P.13.0 - 14.0	SHEET NO. 14
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA				

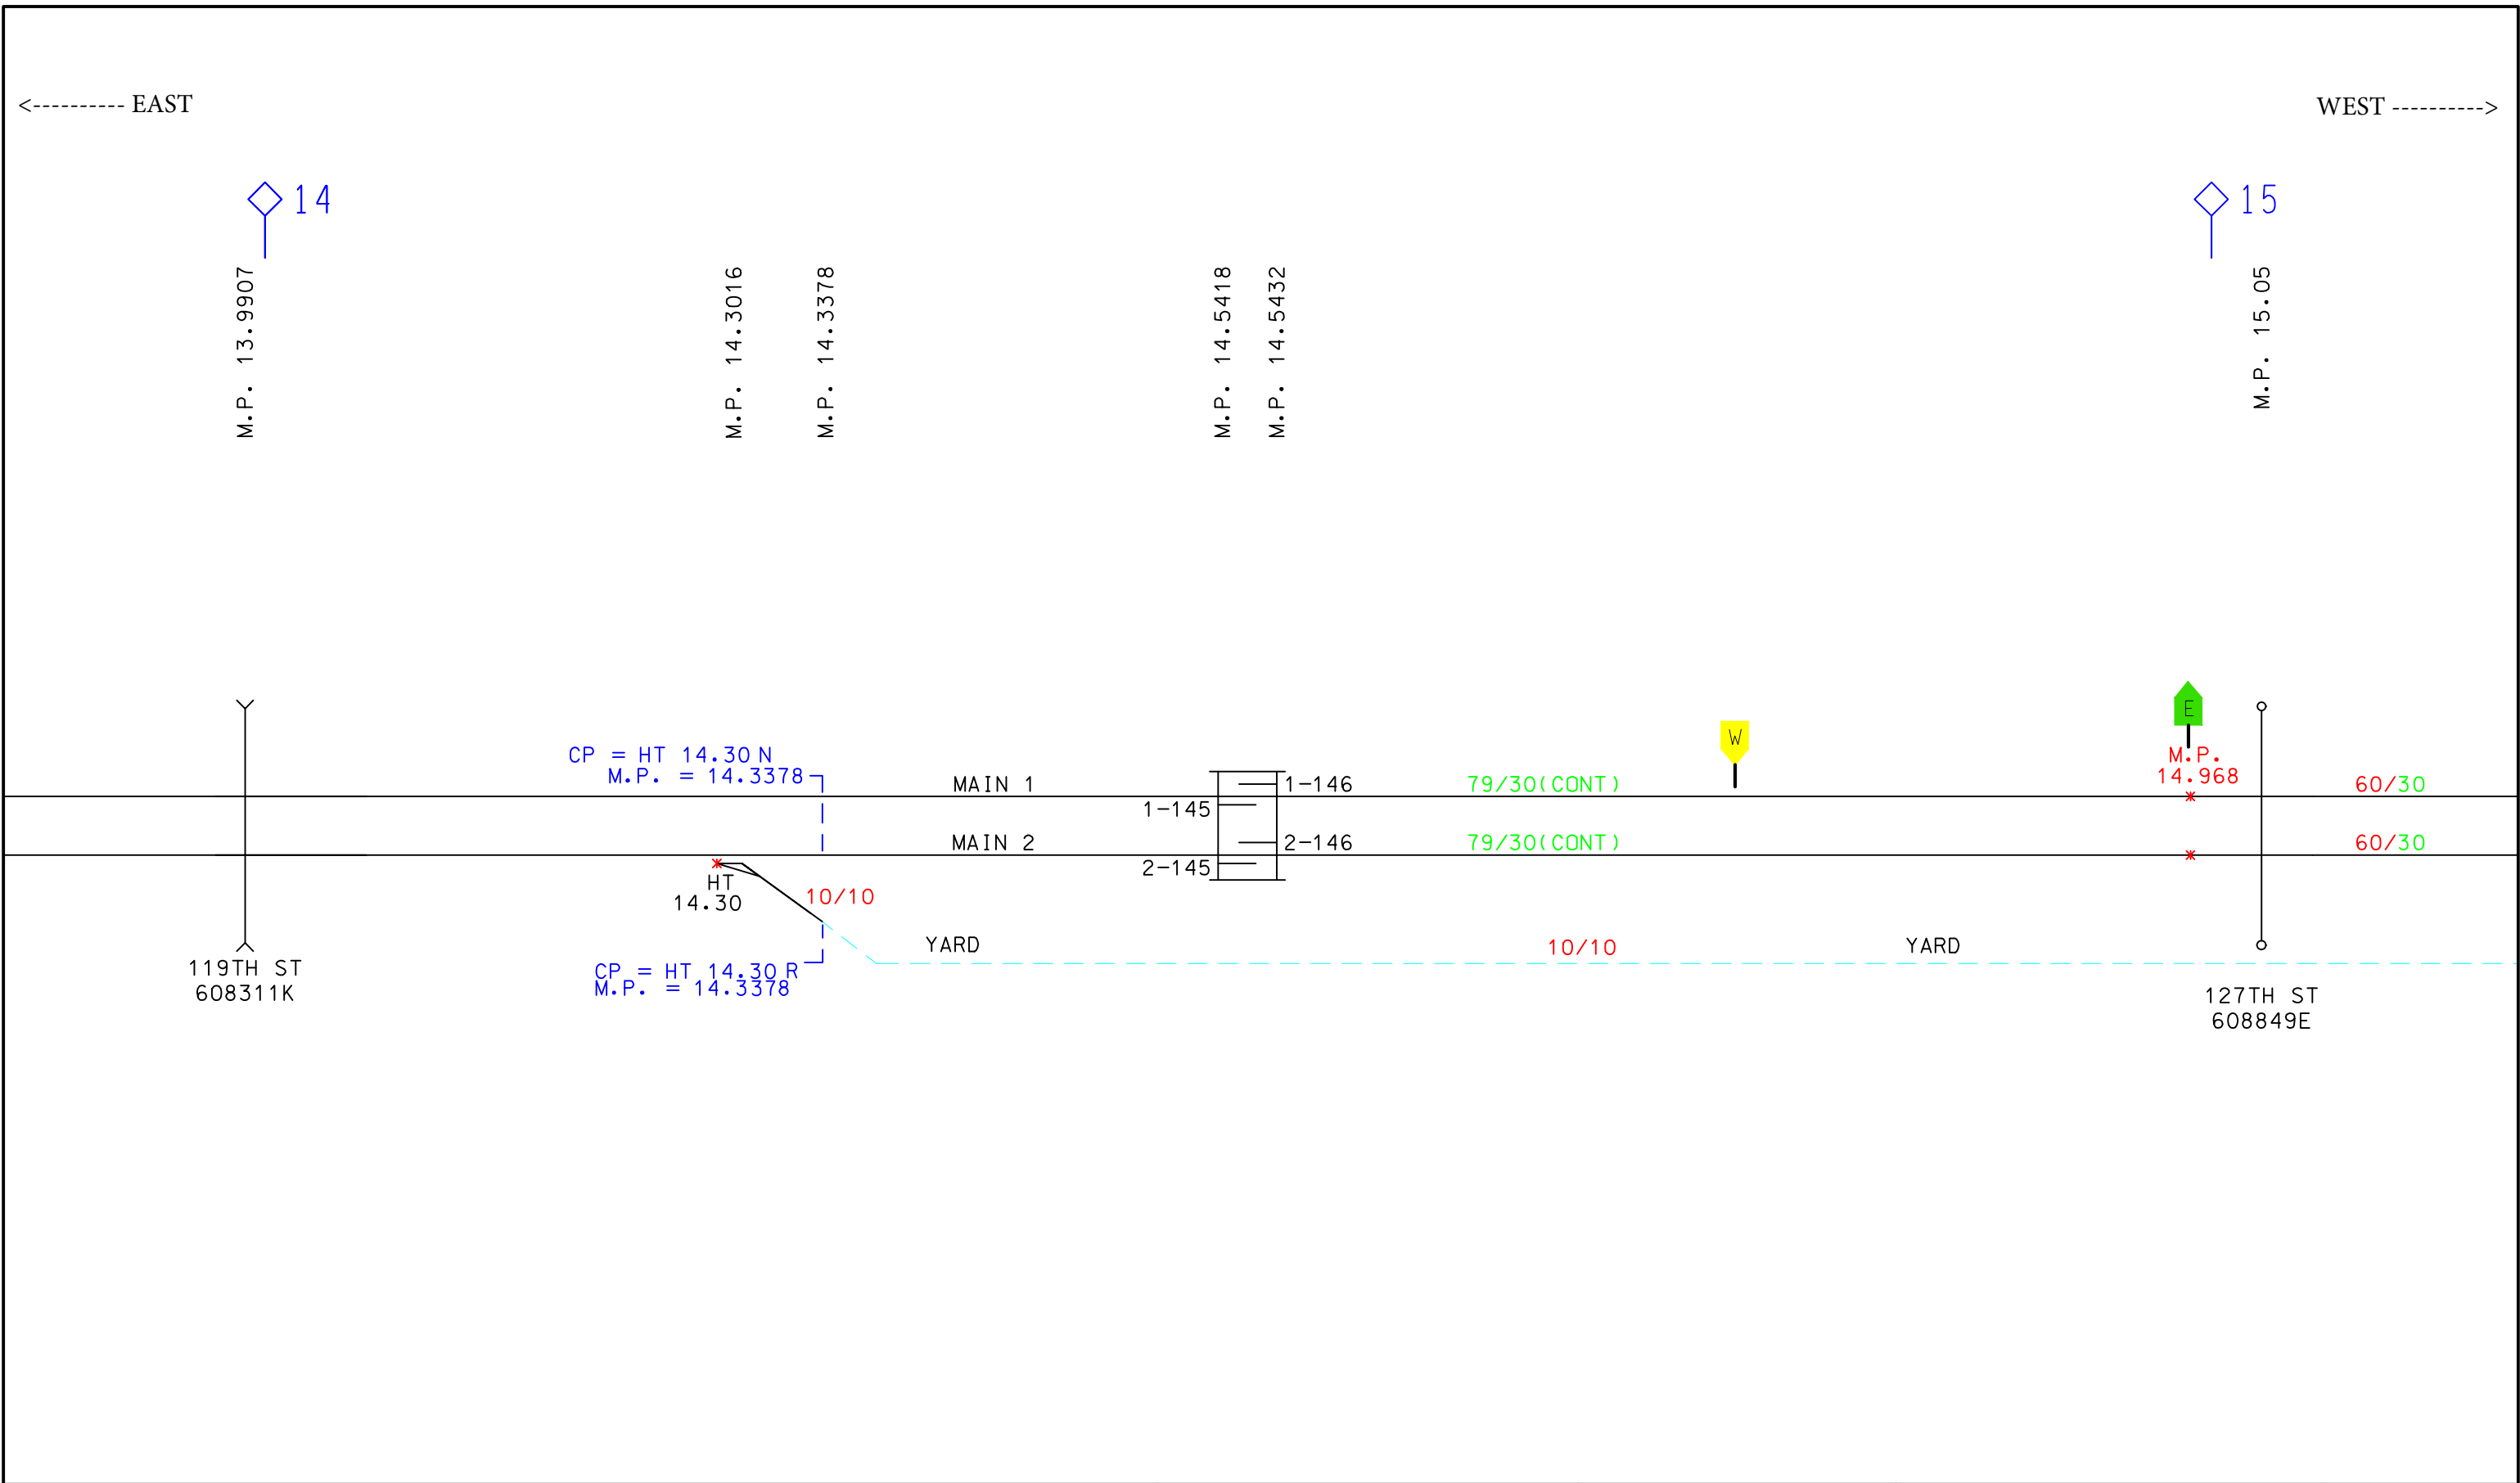

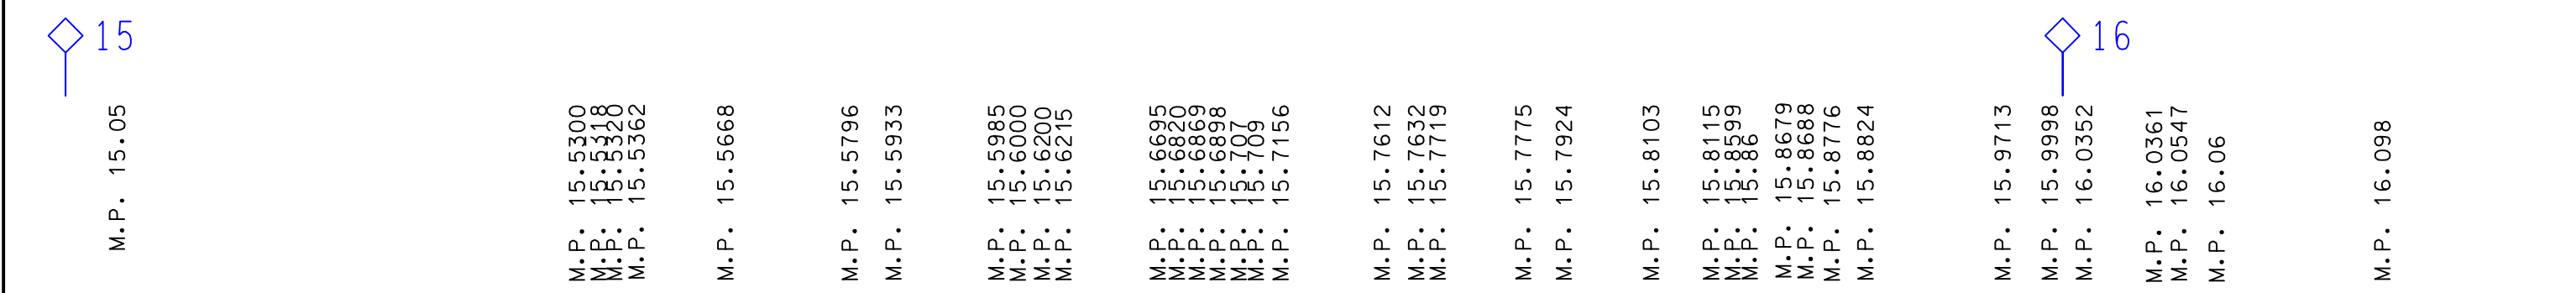

"CP BURR OAK"
(BUR)

"CP WESTERN AVENUE"
(WESTRN)

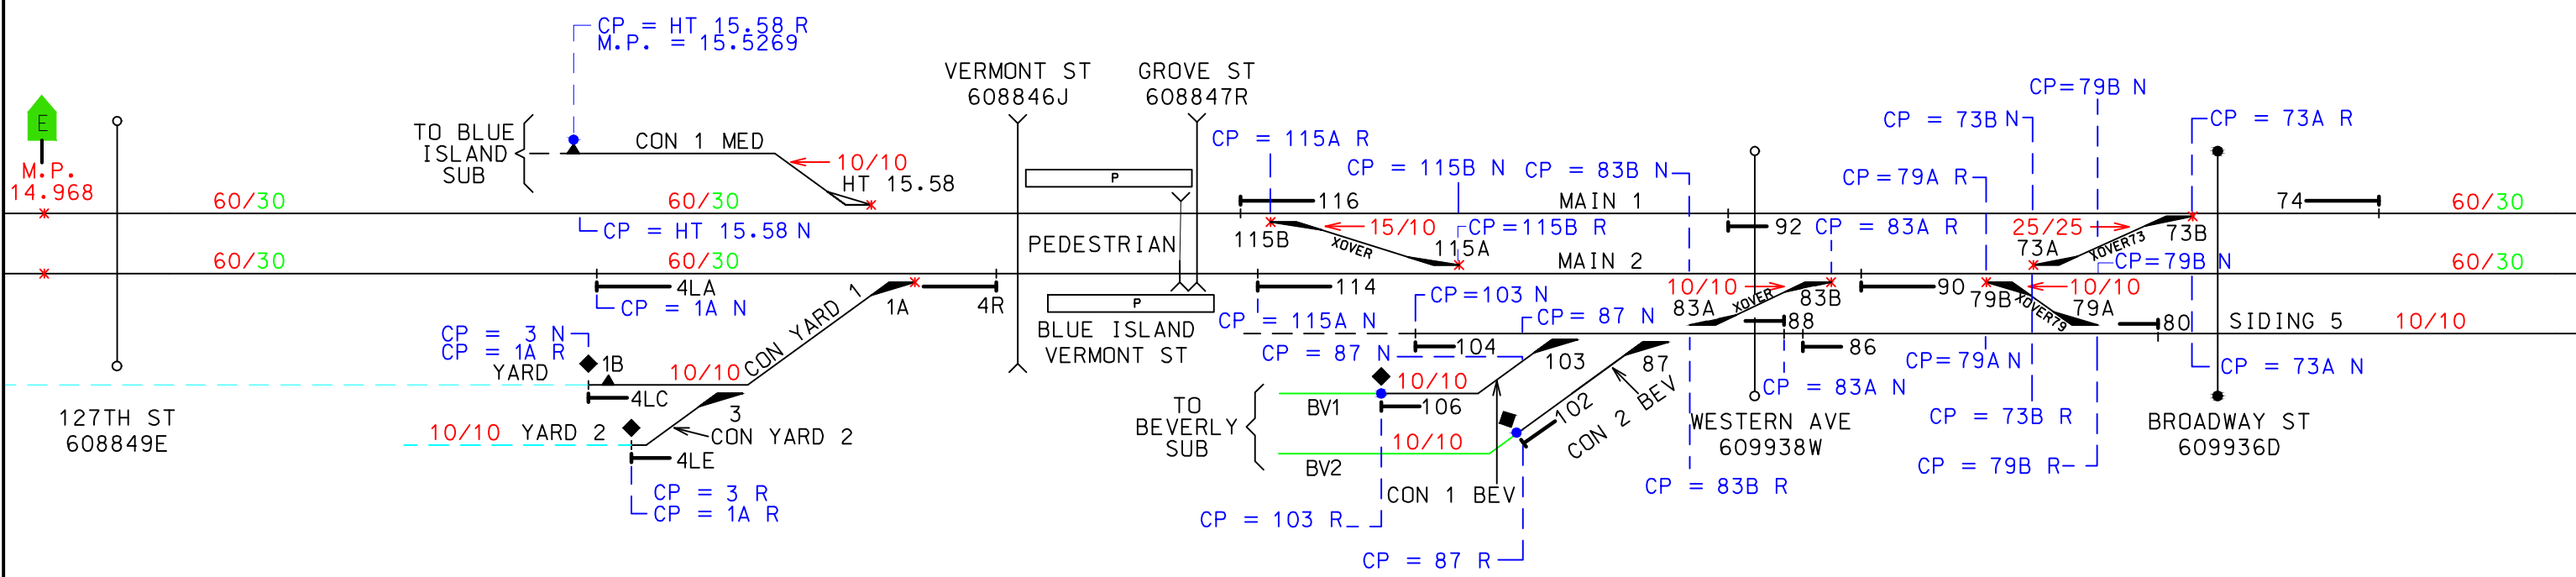

<----- EAST

WEST ----->

16

M.P. 15.9998
M.P. 16.0352

M.P. 16.0361
M.P. 16.0547
M.P. 16.06

M.P. 16.098

M.P. 16.2044

M.P. 16.2411

M.P. 16.247

M.P. 16.26

M.P. 16.32

17


M.P. 16.67
M.P. 16.6841


M.P. 16.74
M.P. 16.7766

M.P. 16.786

M.P. 16.9477
M.P. 16.9547
M.P. 16.9595
M.P. 16.9671
M.P. 16.9741
M.P. 16.9728

"CP INTERCHANGE"


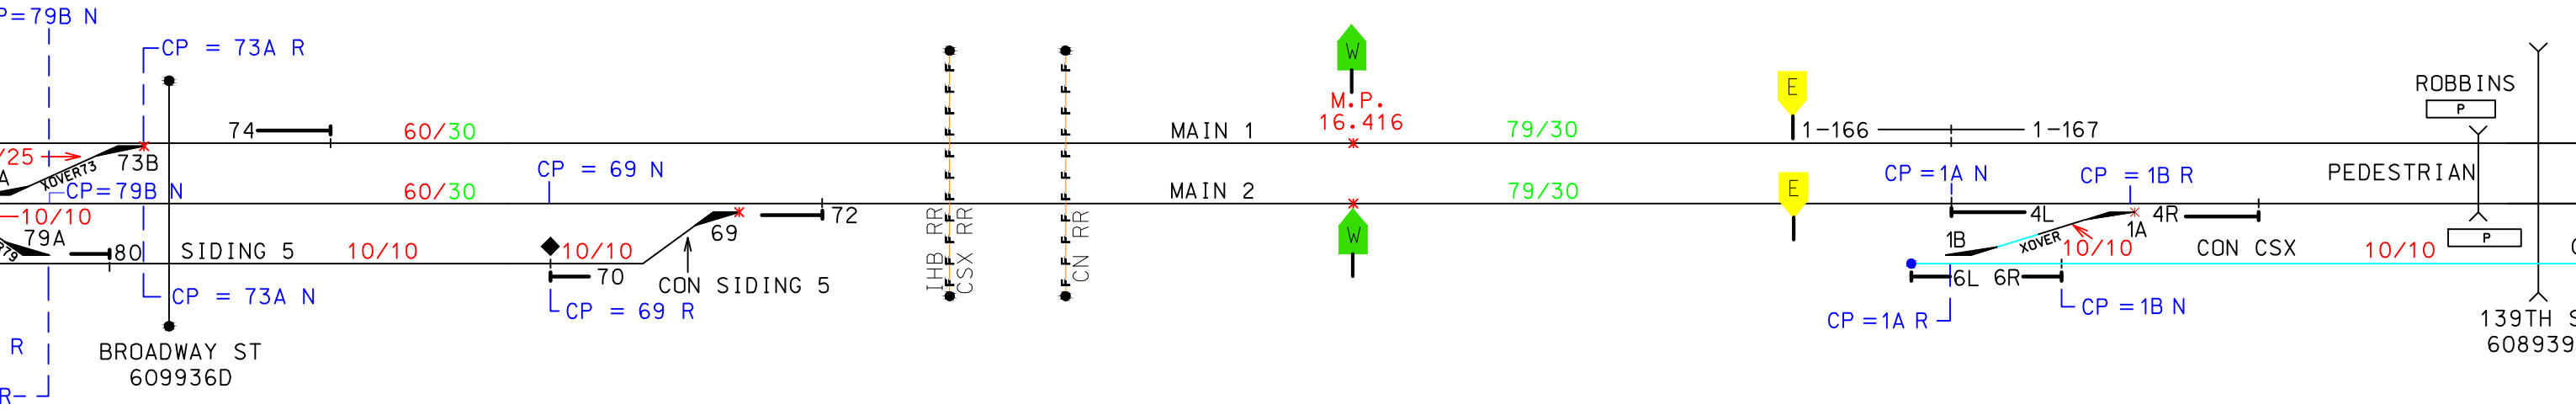


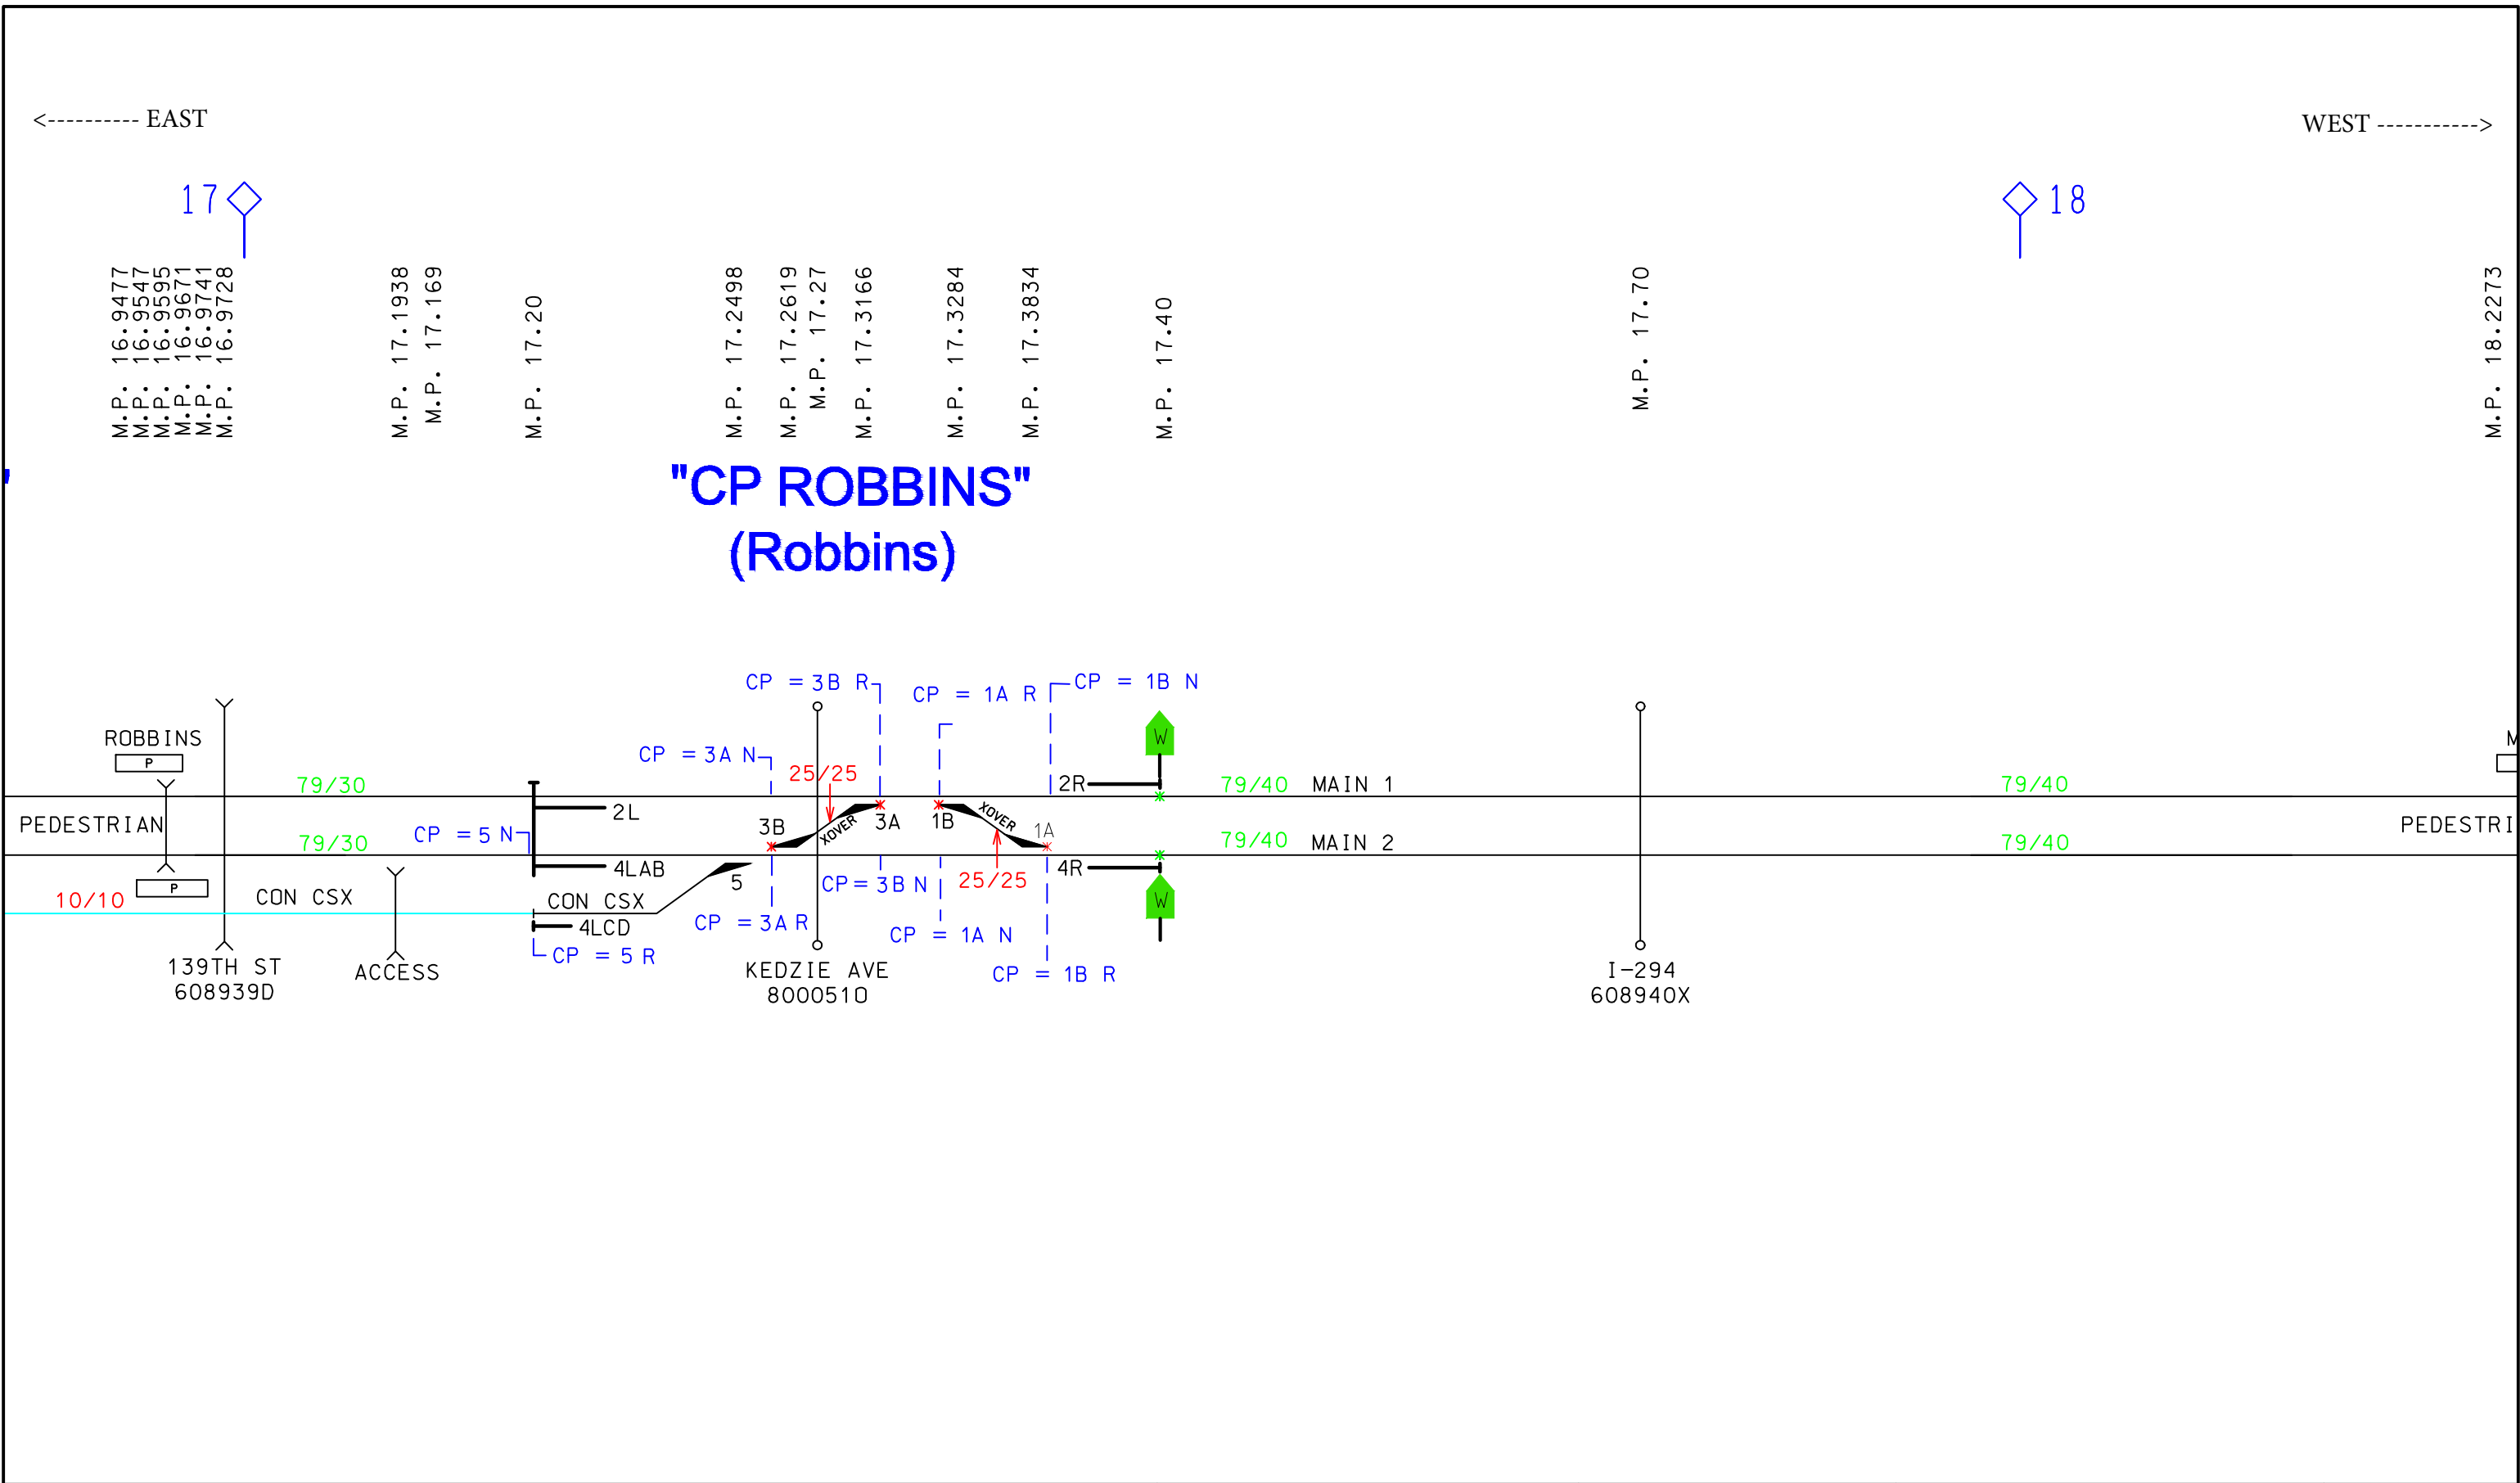

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.17.0 - 18.0	SHEET NO. 18
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJ				

<----- EAST

WEST ----->



M.P. 18.2273

M.P. 18.332

M.P. 18.3372


M.P. 18.3883

M.P. 18.3890

M.P. 18.4903

M.P. 18.7501

M.P. 18.7589

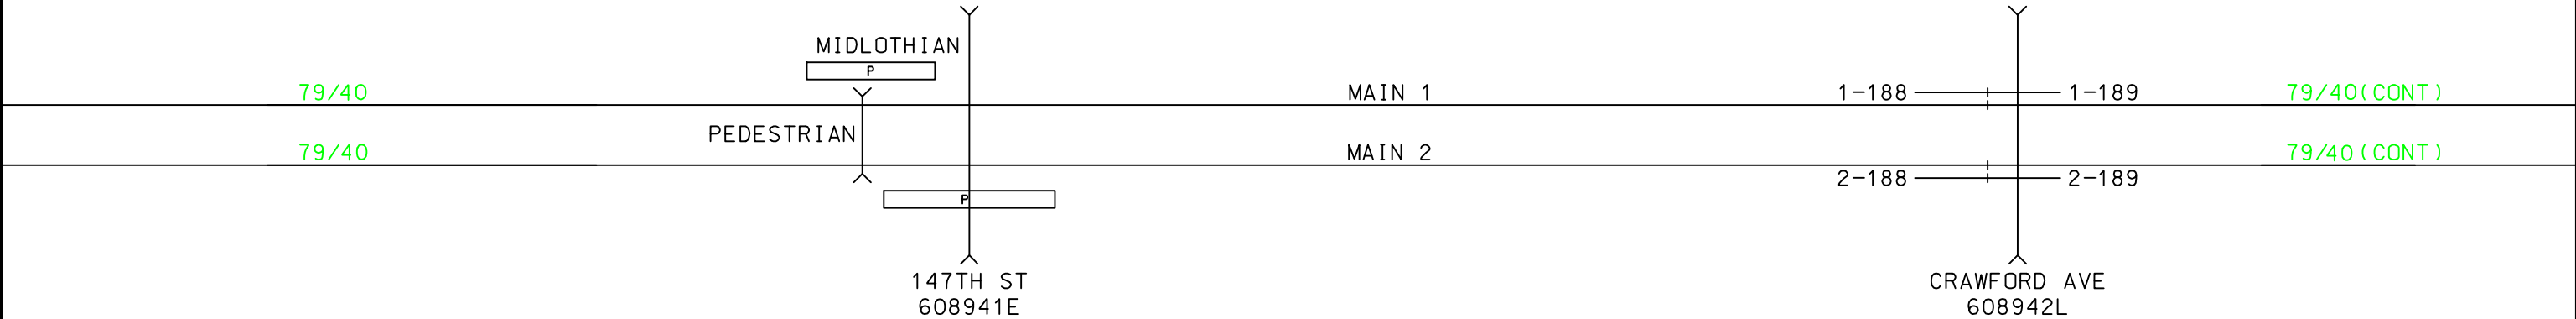

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.18.0 - 19.0	SHEET NO. 19
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA				

<----- EAST

WEST ----->



M.P. 20.20

M.P. 20.2341

M.P. 20.2992

M.P. 20.3893

M.P. 20.5279

M.P. 20.328


M.P. 20.3772

M.P. 20.4564

M.P. 20.5026


M.P. 20.5157


M.P. 20.9518

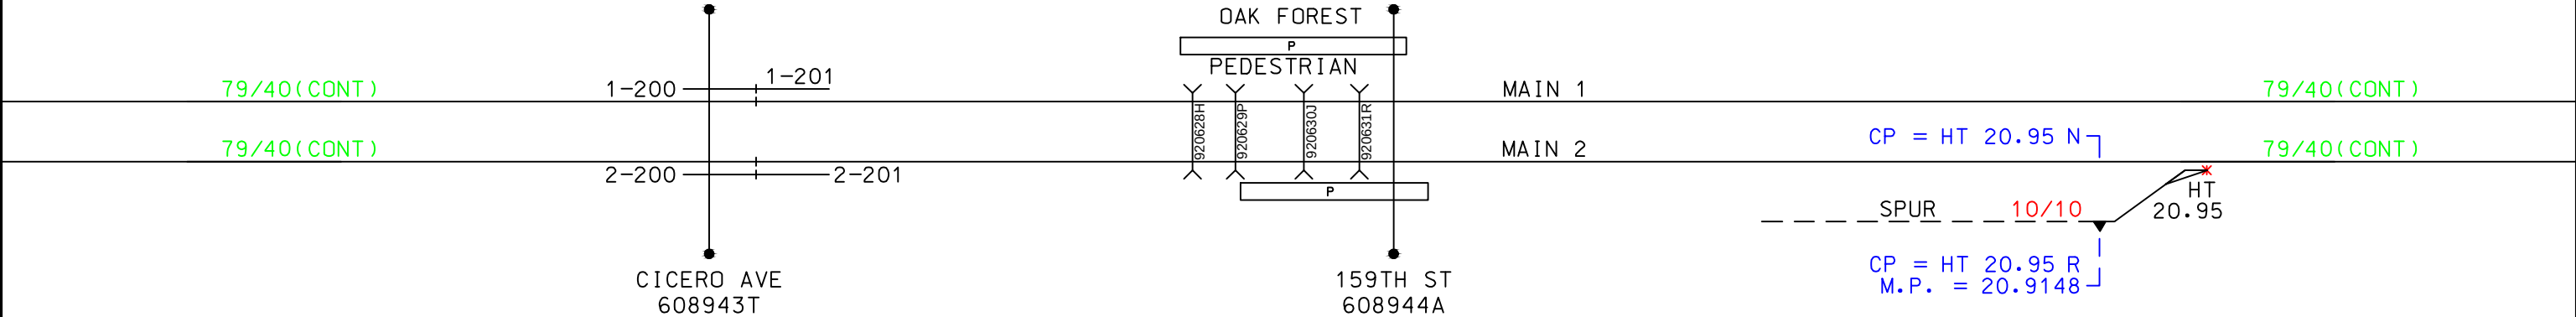

<----- EAST

WEST ----->

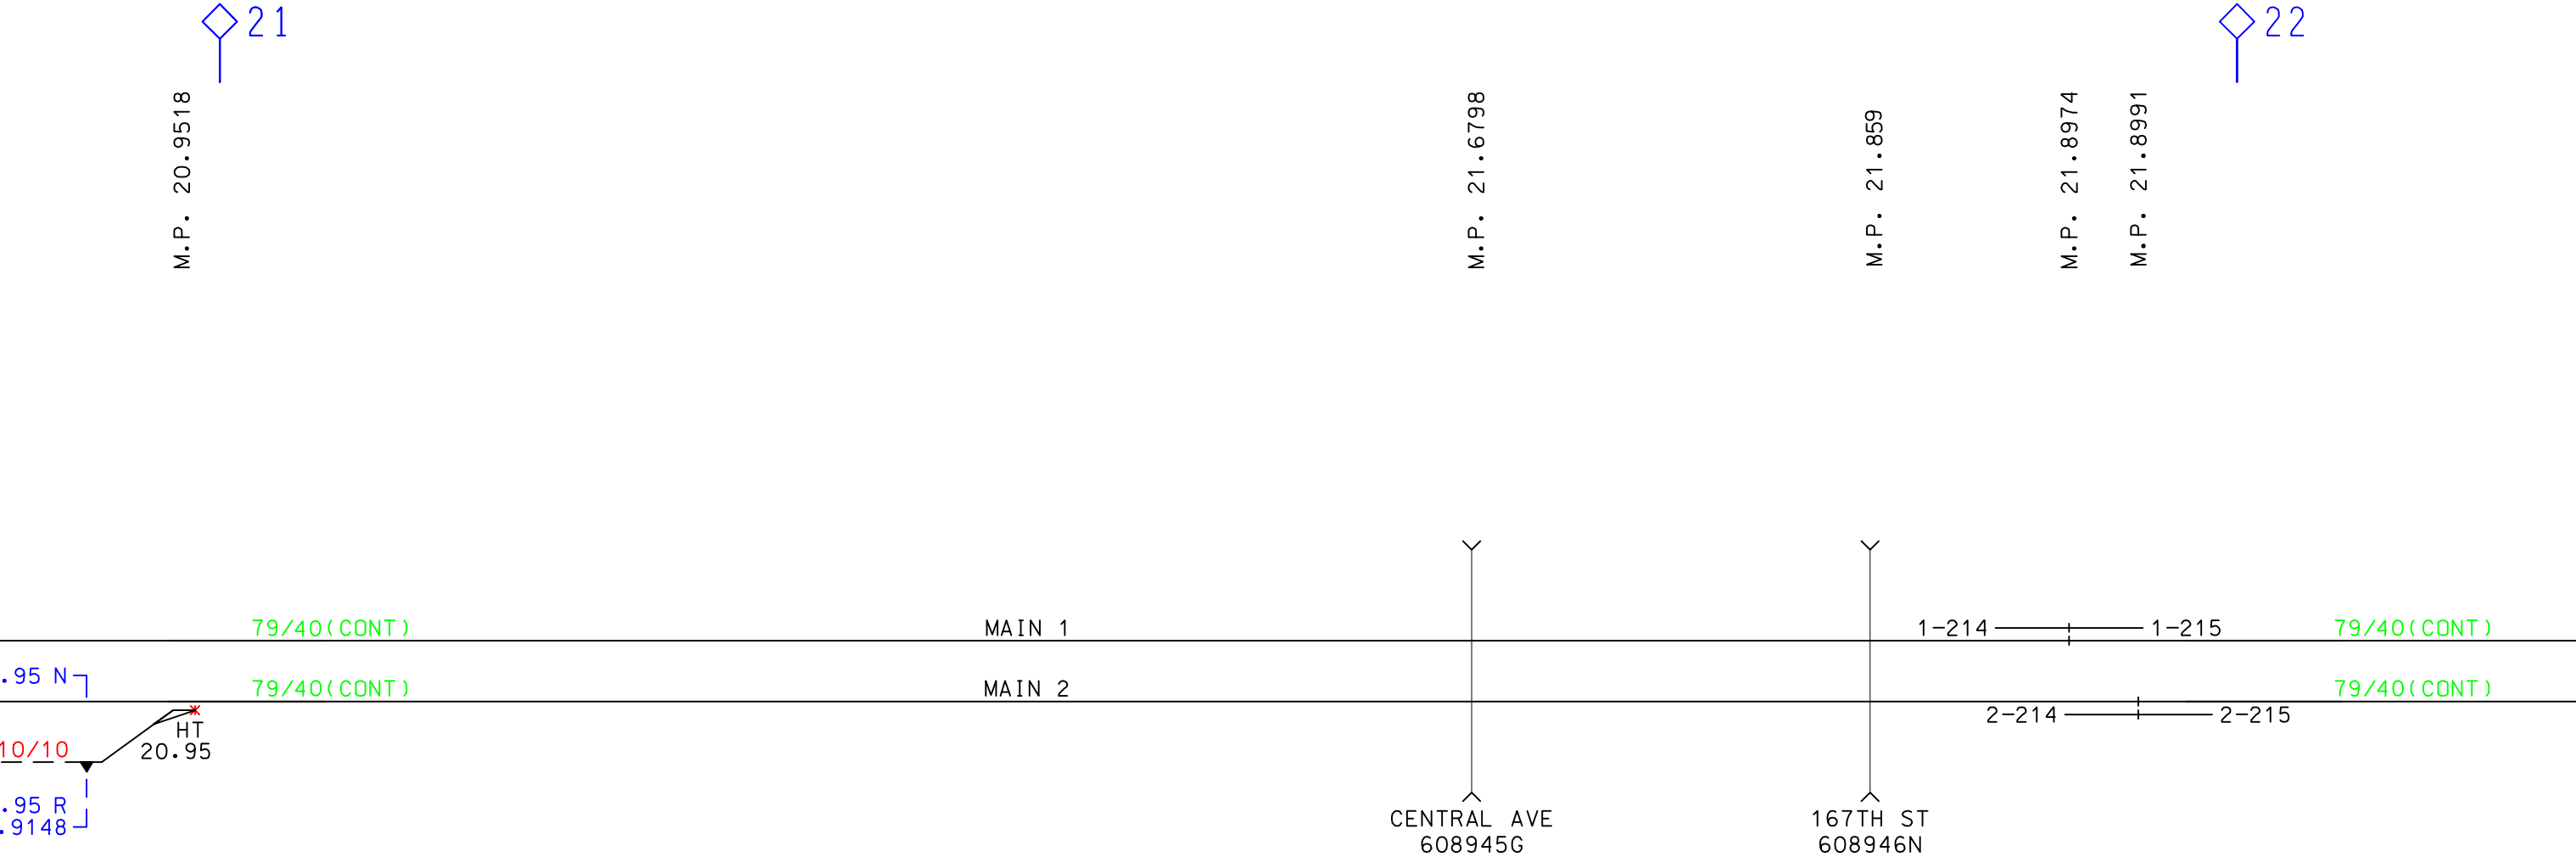

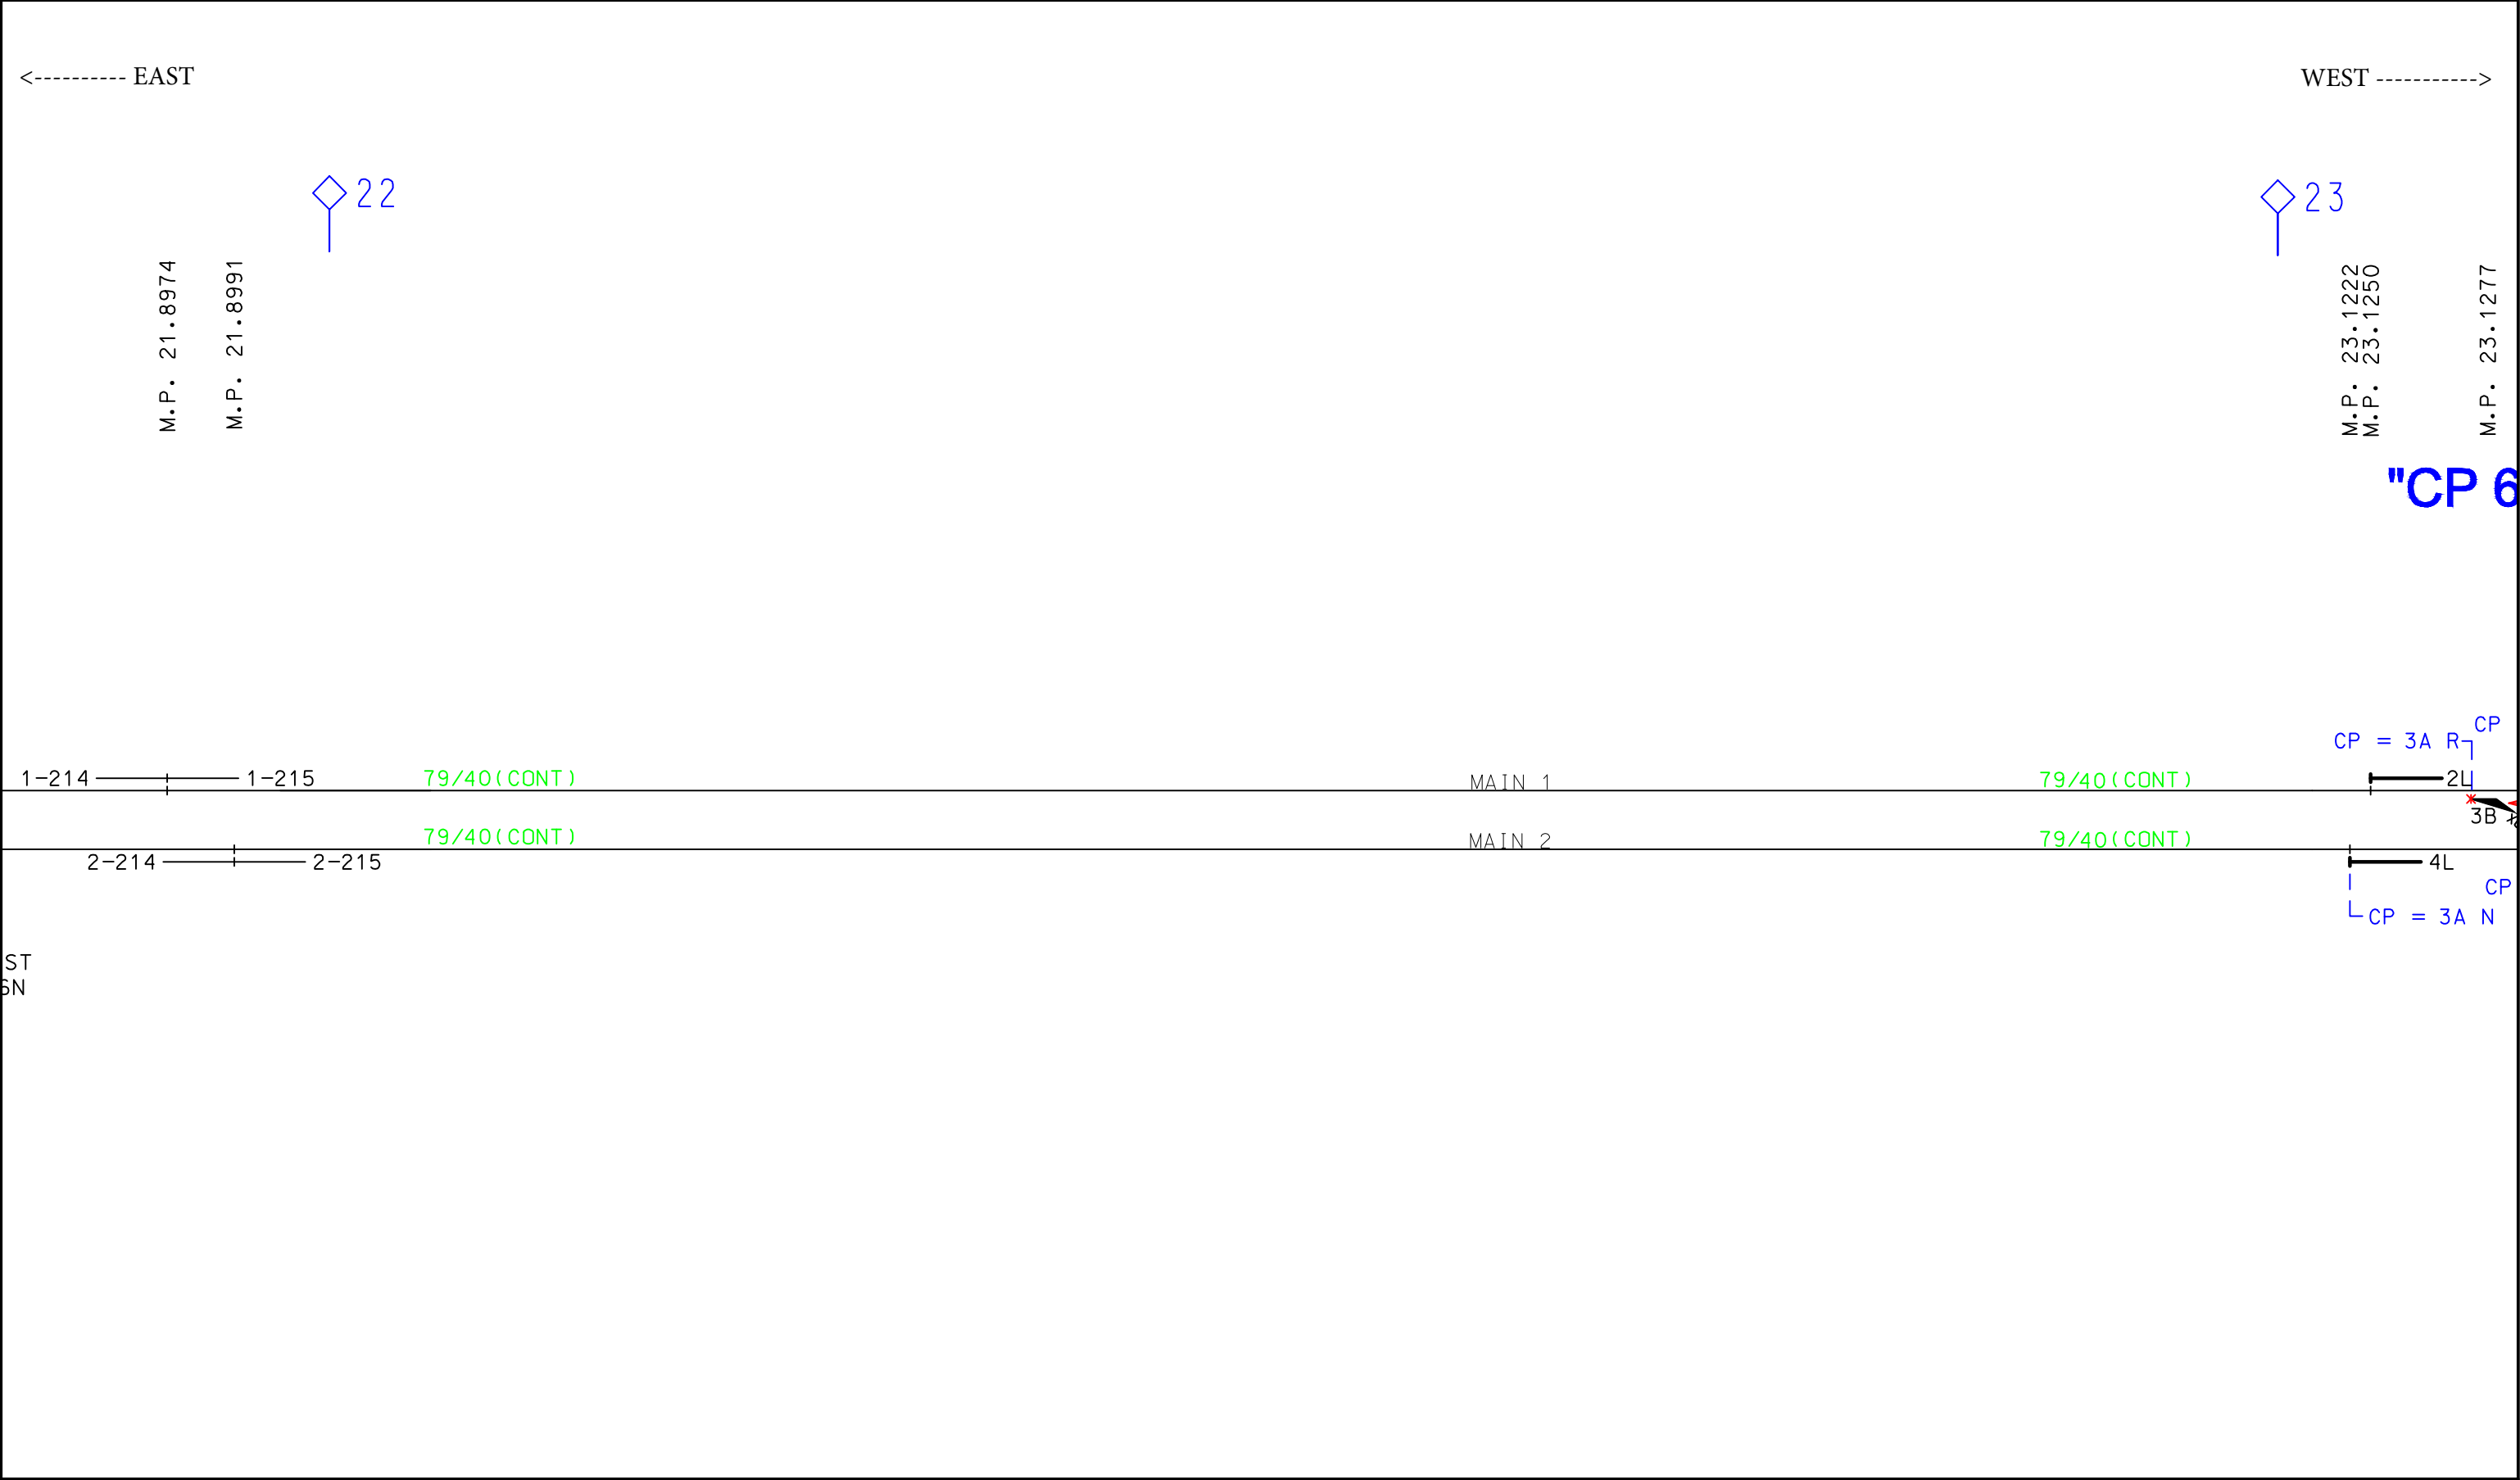

<----- EAST

WEST ----->

23

24

M.P. 23.1222
M.P. 23.1250

M.P. 23.1277

M.P. 23.1971

M.P. 23.2143

M.P. 23.2836

M.P. 23.2944

M.P. 23.3001
M.P. 23.3081


M.P. 23.4054

M.P. 23.4824
M.P. 23.4820
M.P. 23.4845

M.P. 23.5436

M.P. 24.00


"CP 66TH COURT"
(66th)

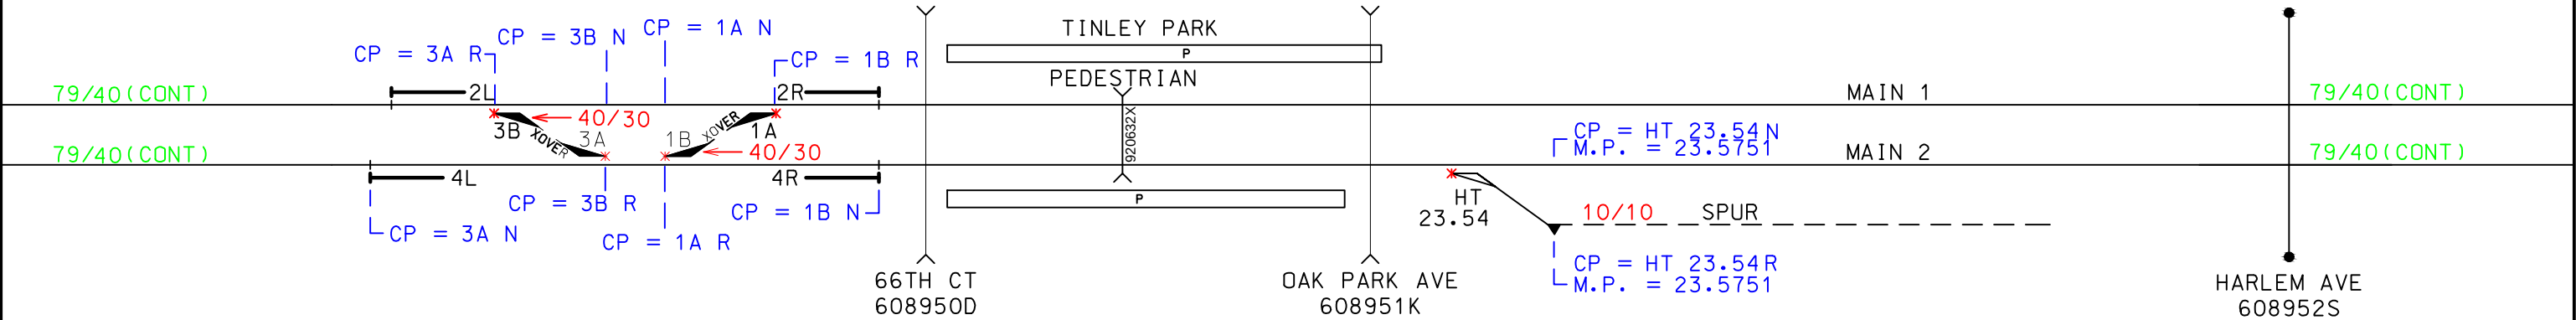

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.23.0 - 24.0	SHEET NO. 24
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA				


<----- EAST


WEST ----->

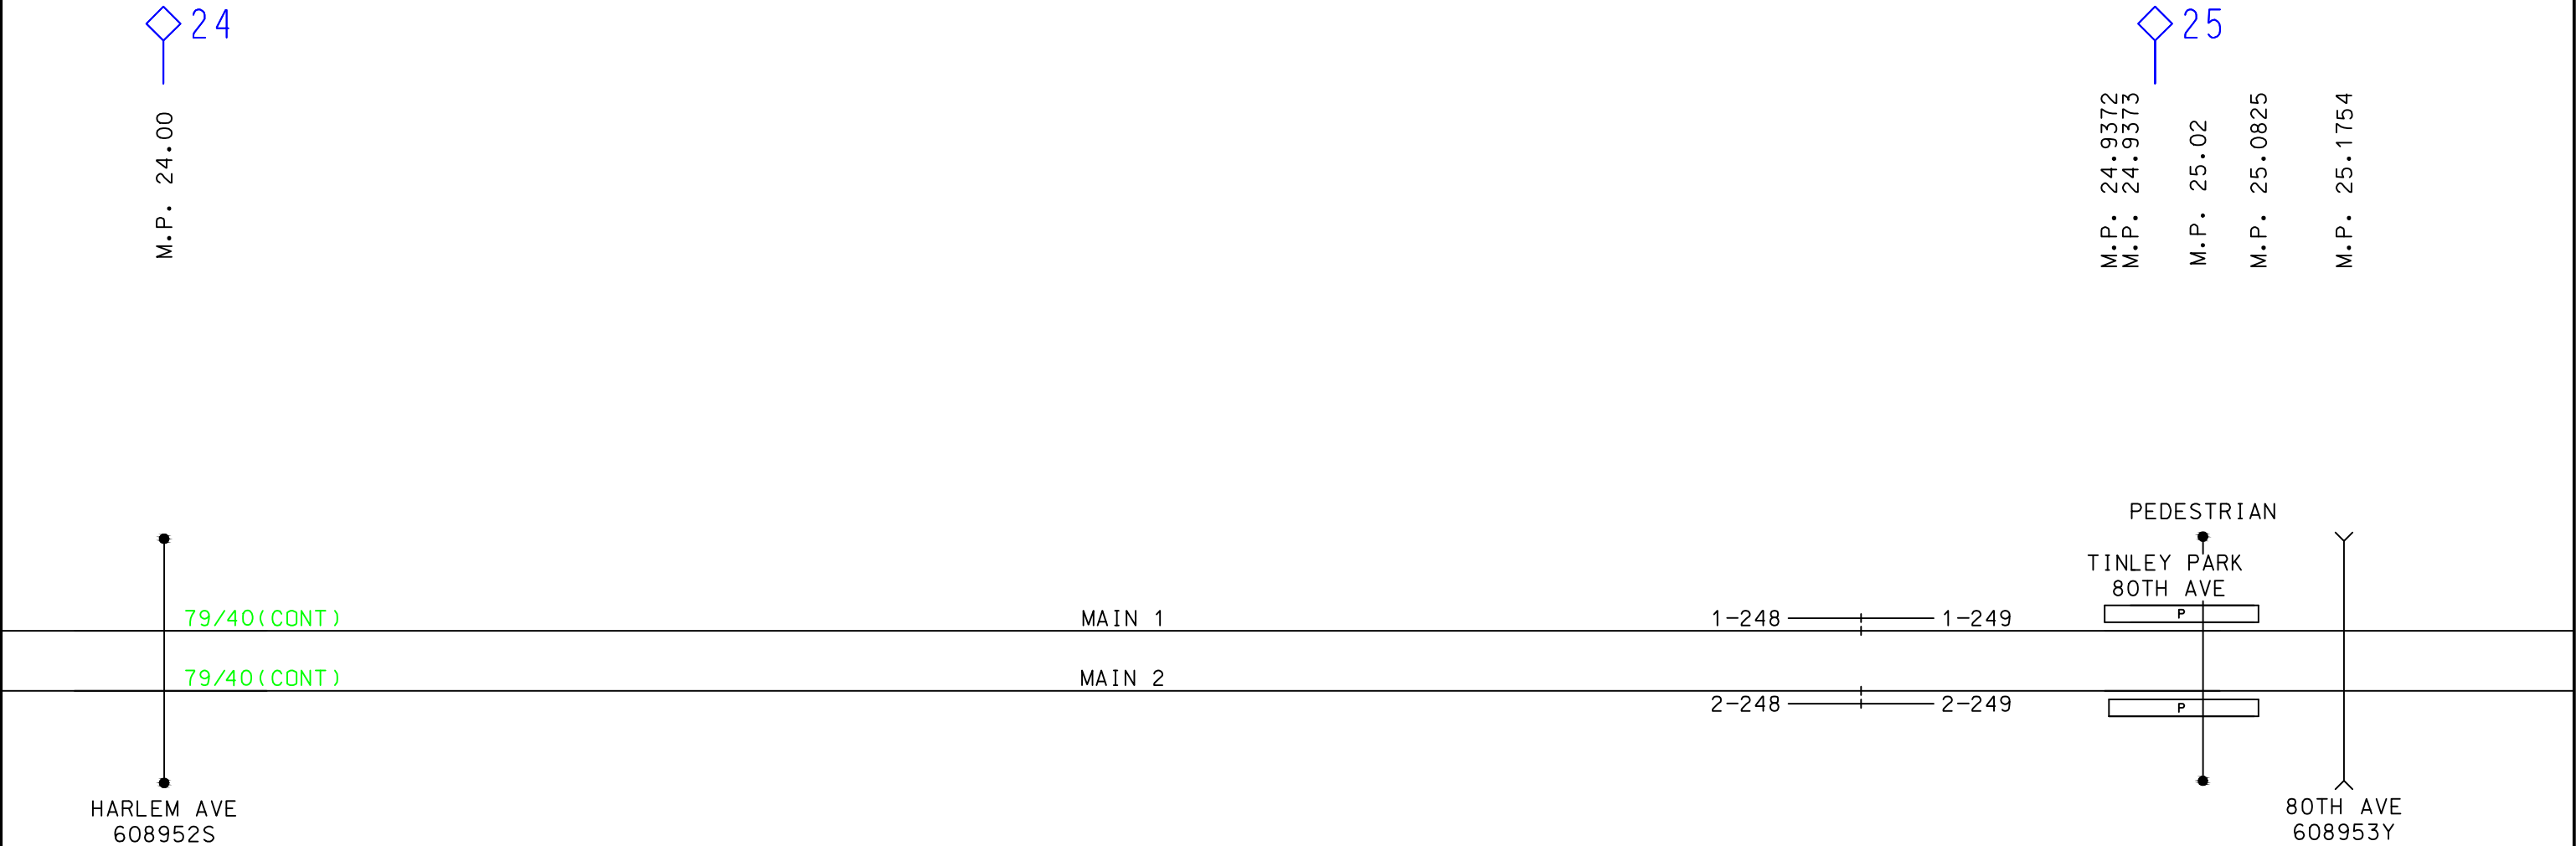


<----- EAST

WEST ----->

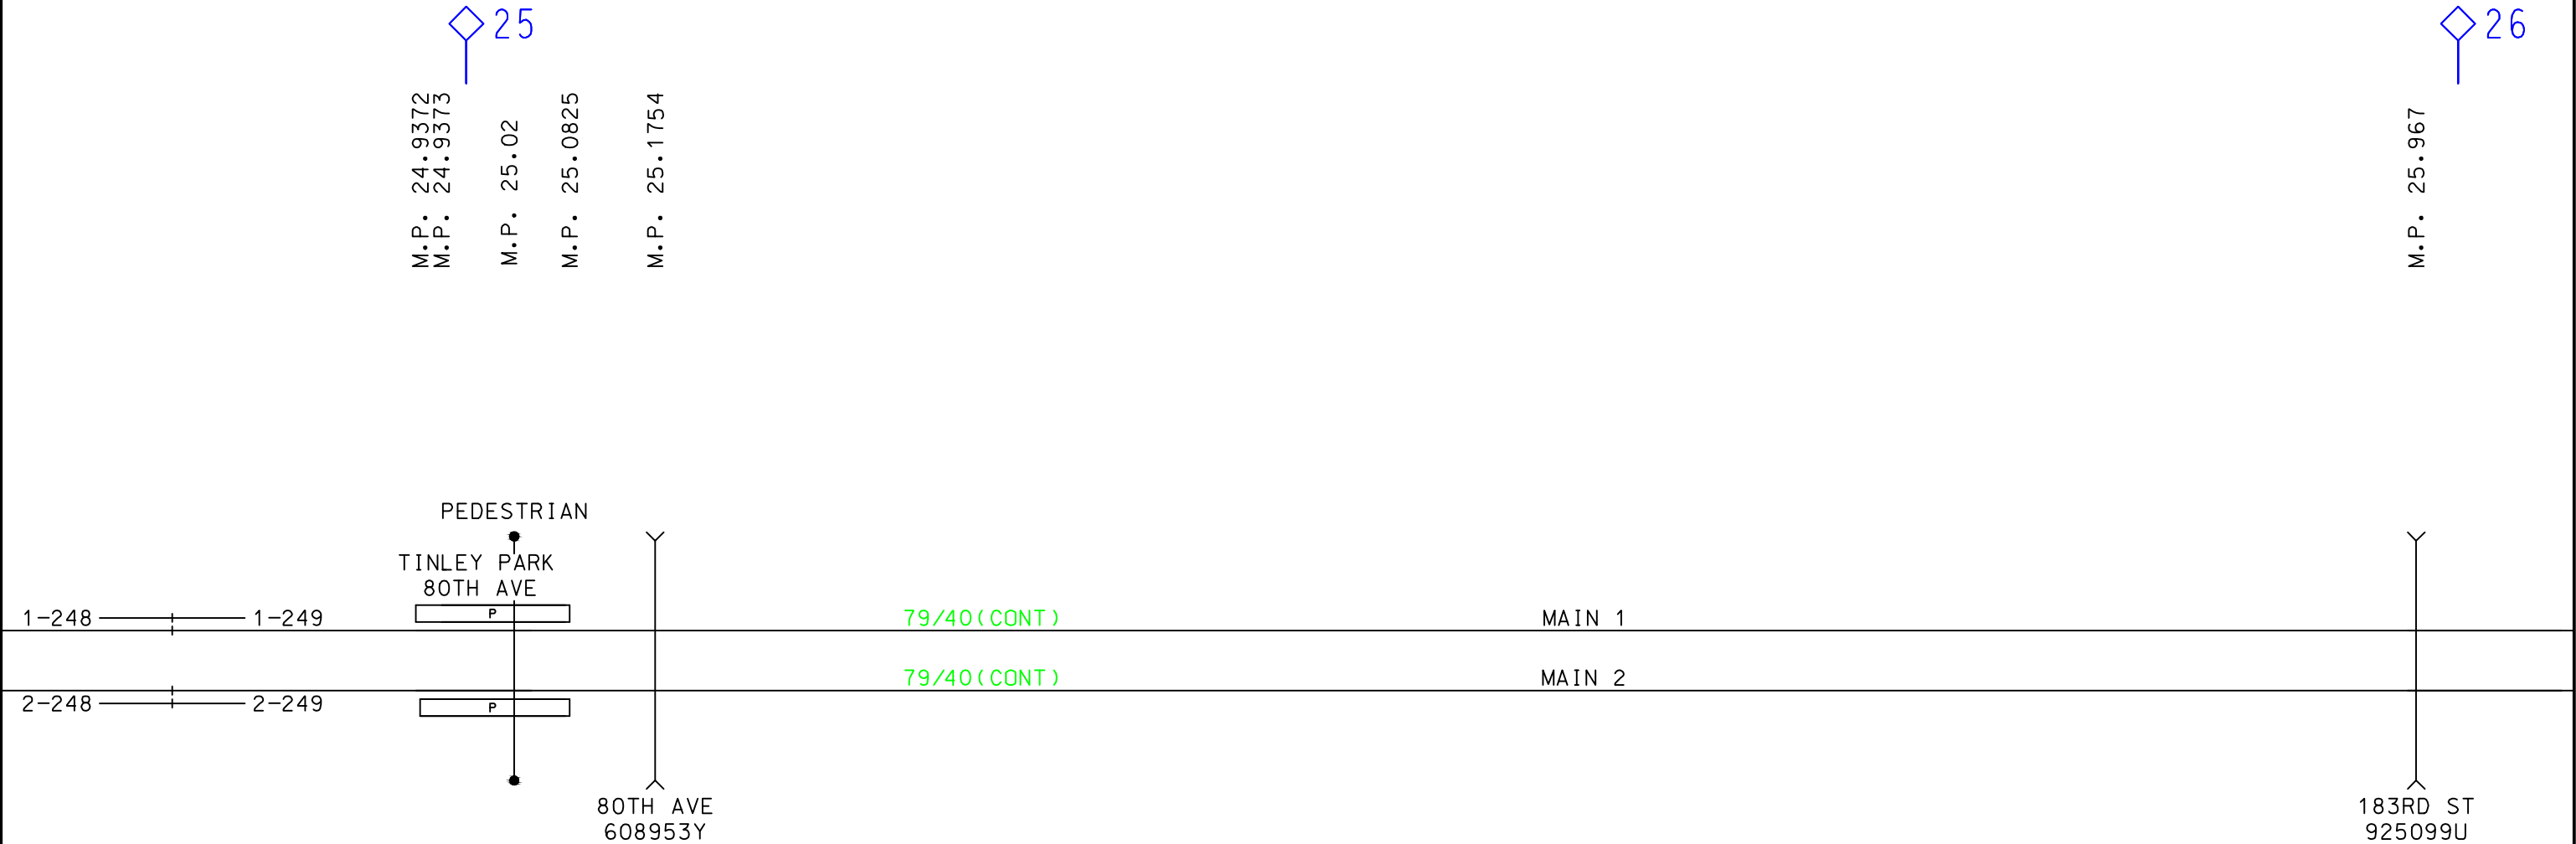


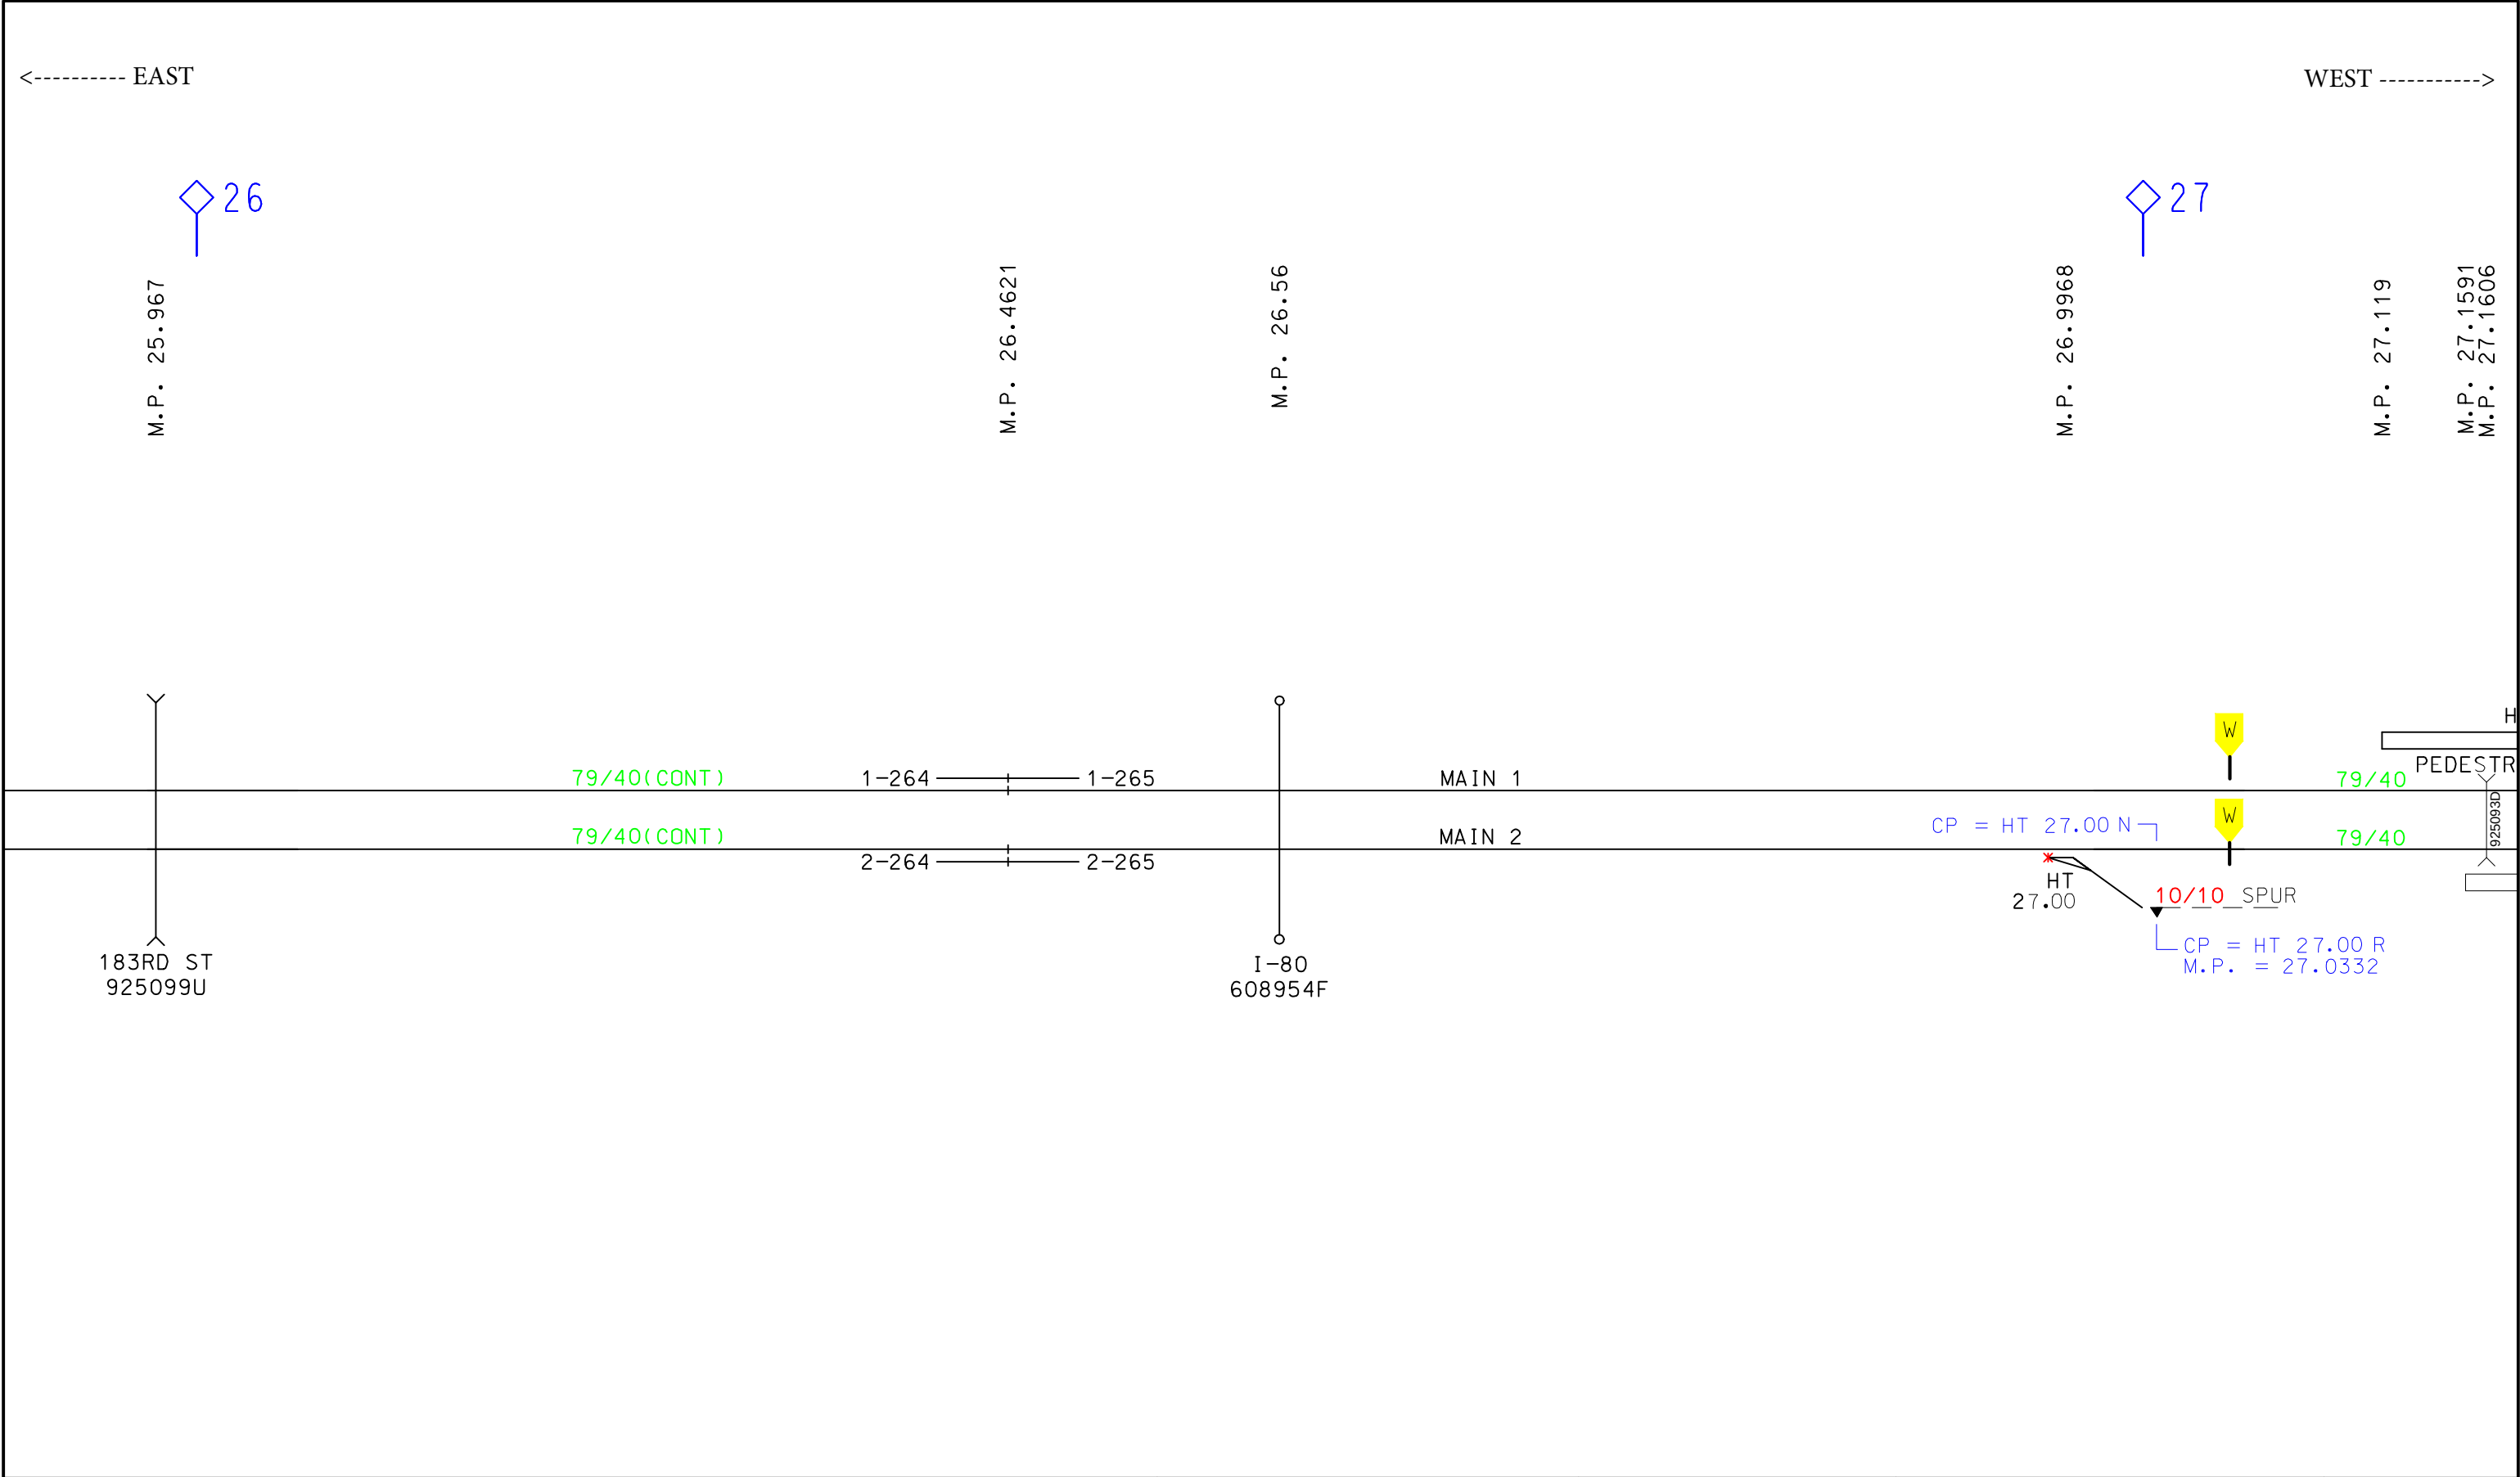

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.26.0 - 27.0	SHEET NO. 27
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJ				

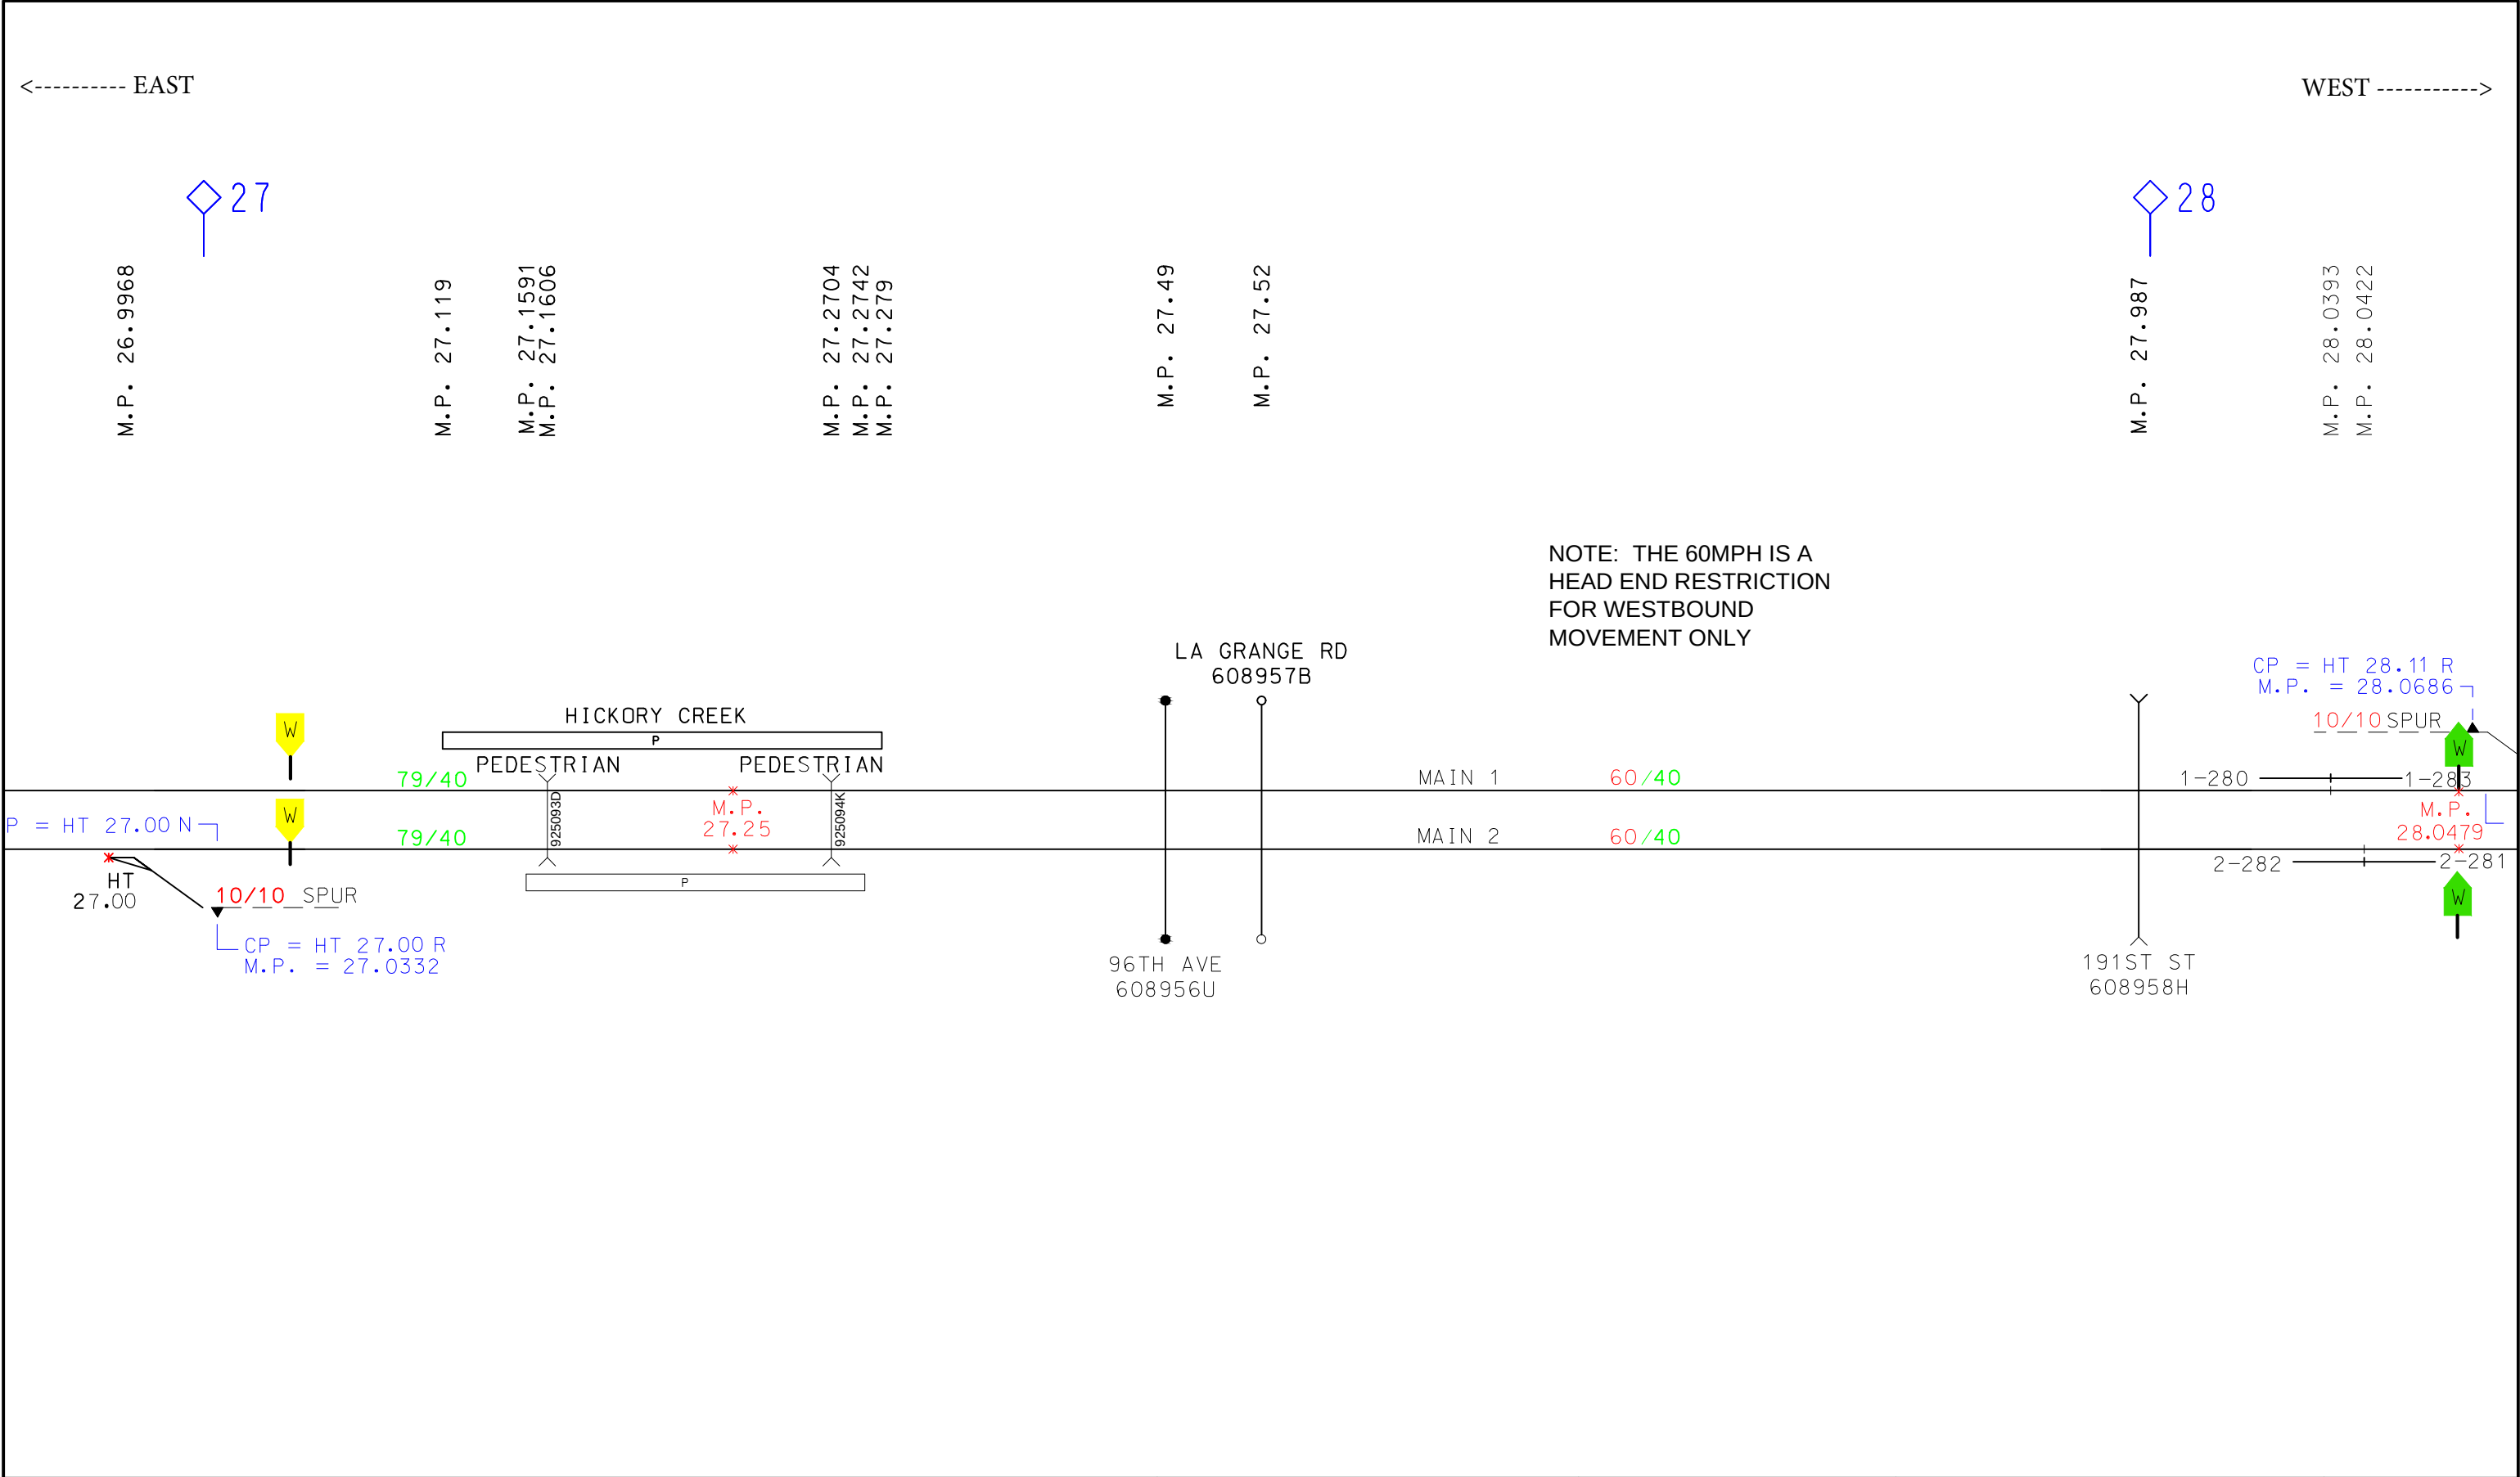

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	Metra 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.27.0 - 28.0	SHEET NO. 28
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA				

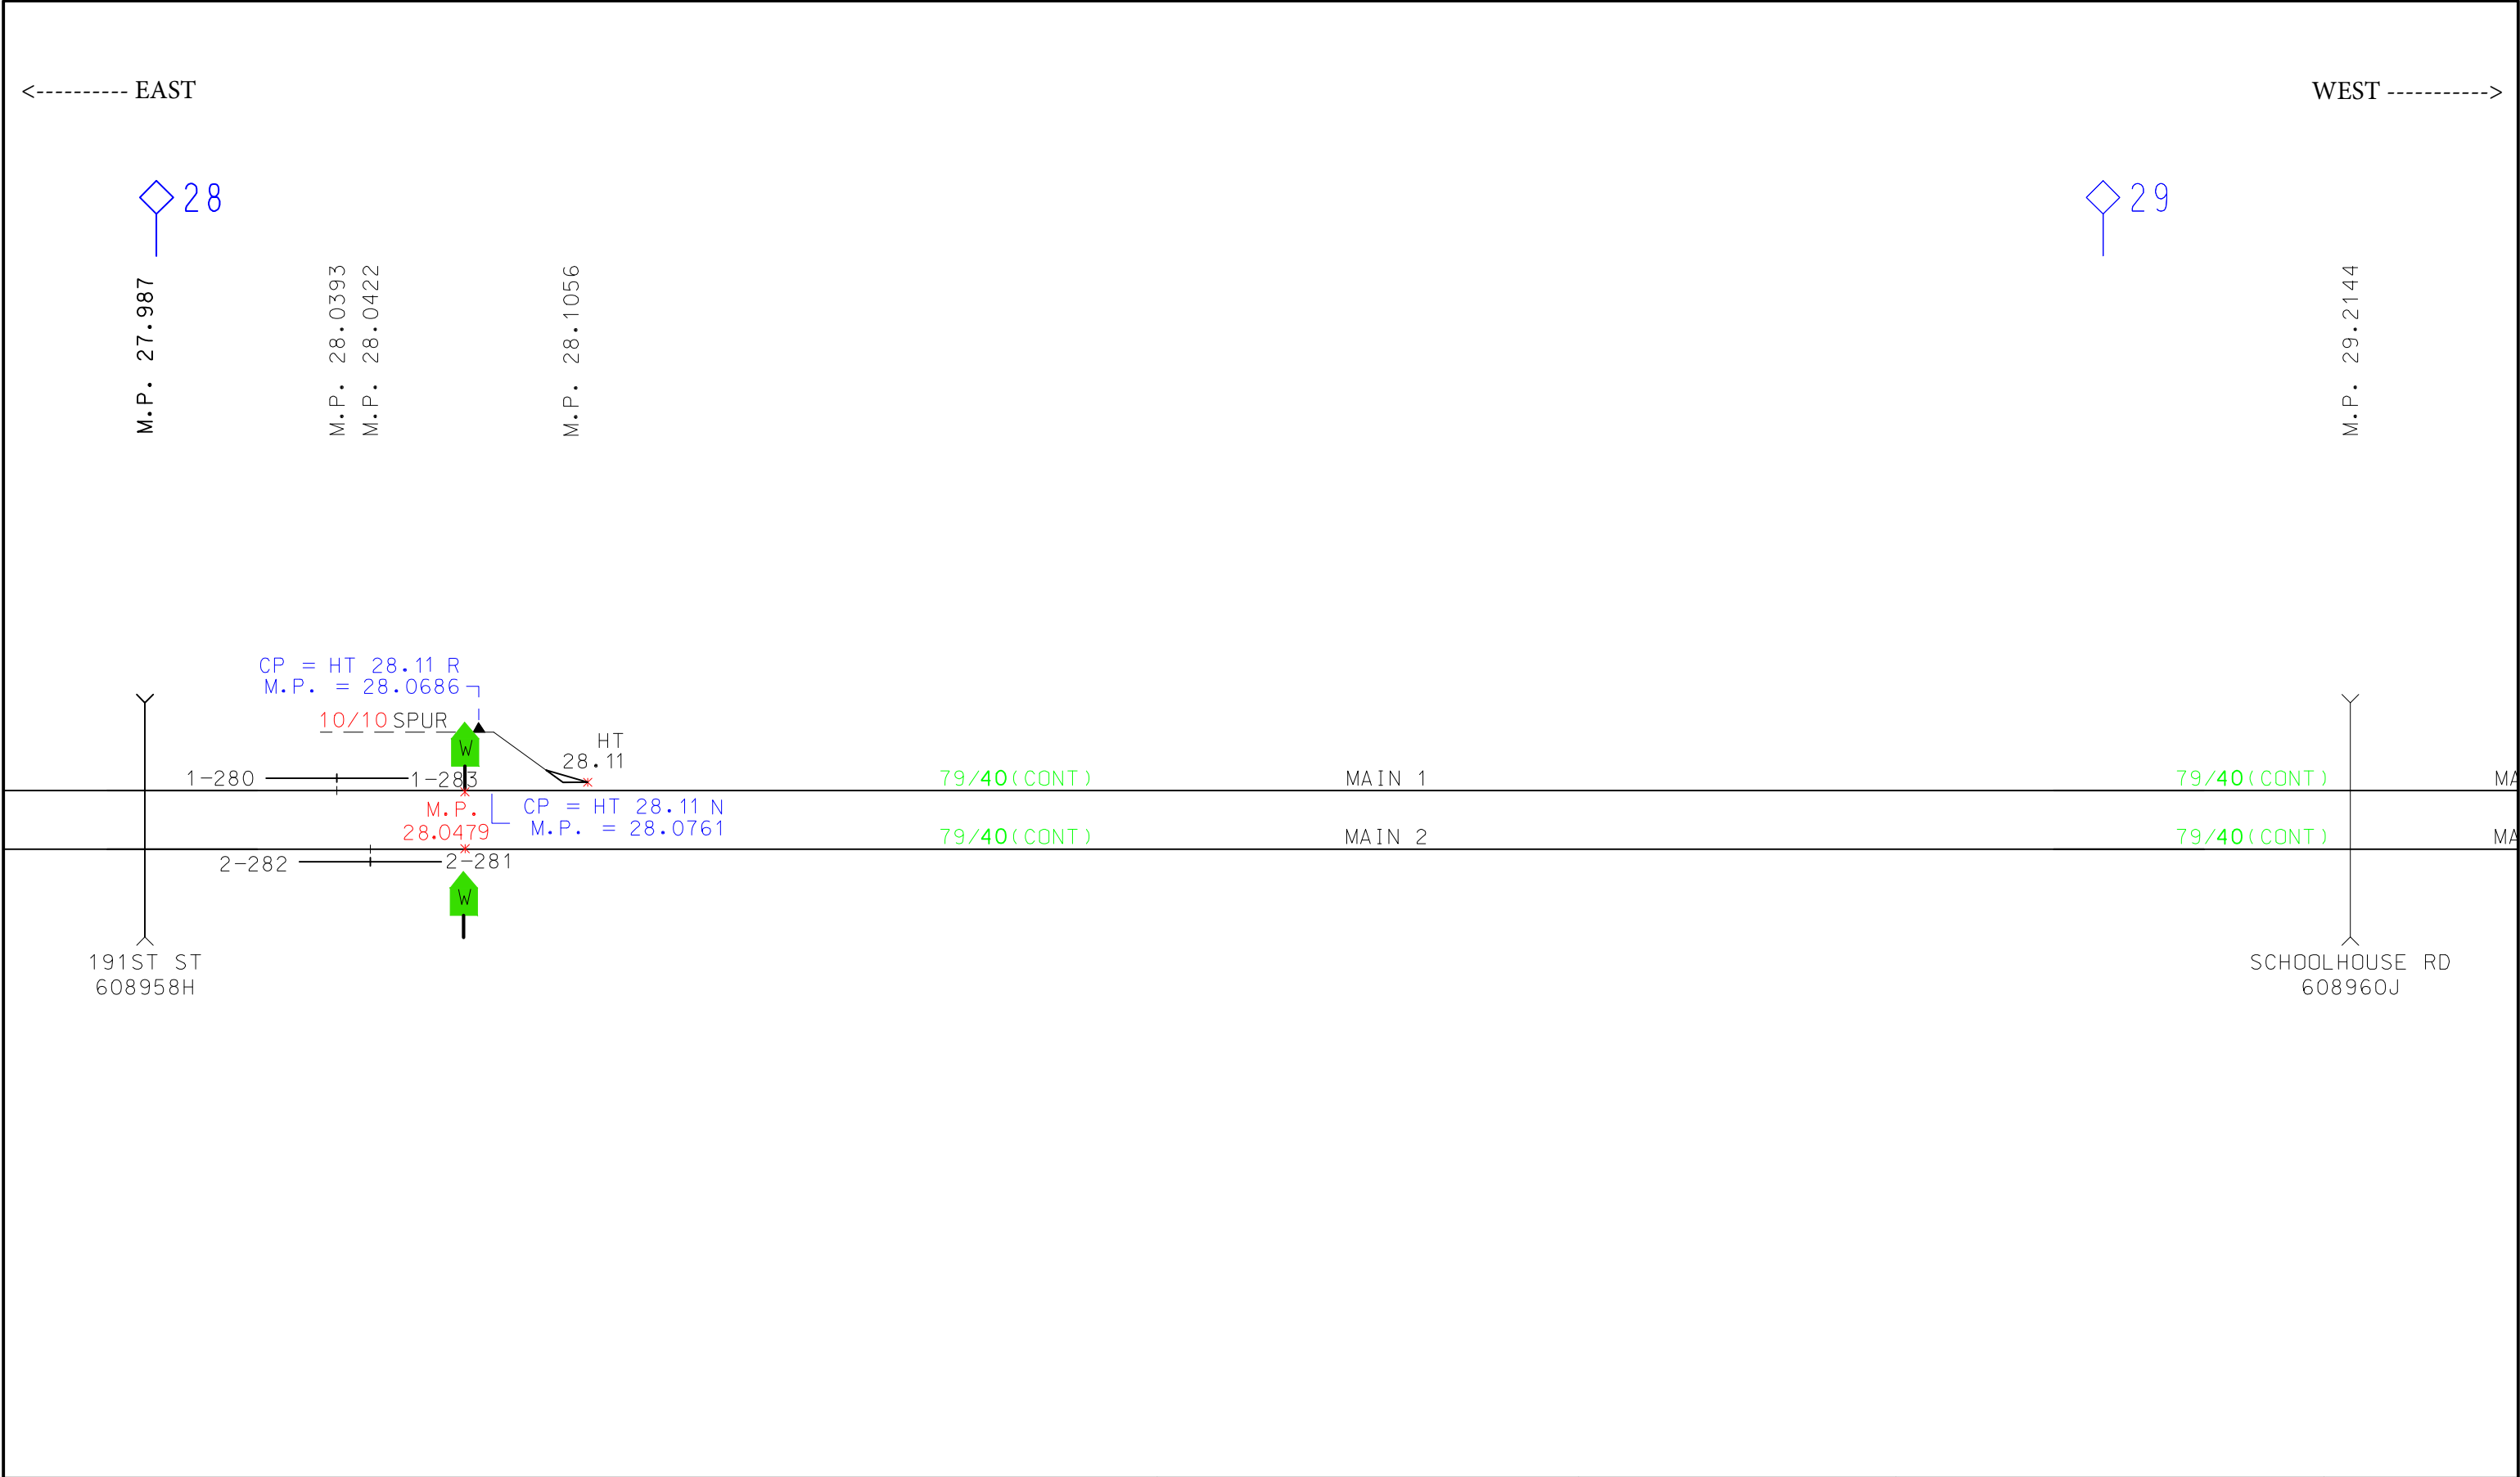

<----- EAST

WEST ----->

29

30


M.P. 29.2144


M.P. 29.5674
M.P. 29.5701
M.P. 29.5862
M.P. 29.5886

M.P. 29.603
M.P. 29.6121
M.P. 29.6424
M.P. 29.6567
M.P. 29.7091
M.P. 29.7168
M.P. 29.7296
M.P. 29.7943
M.P. 29.804

M.P. 29.8262



"CP MOKENA"
(Mokena)

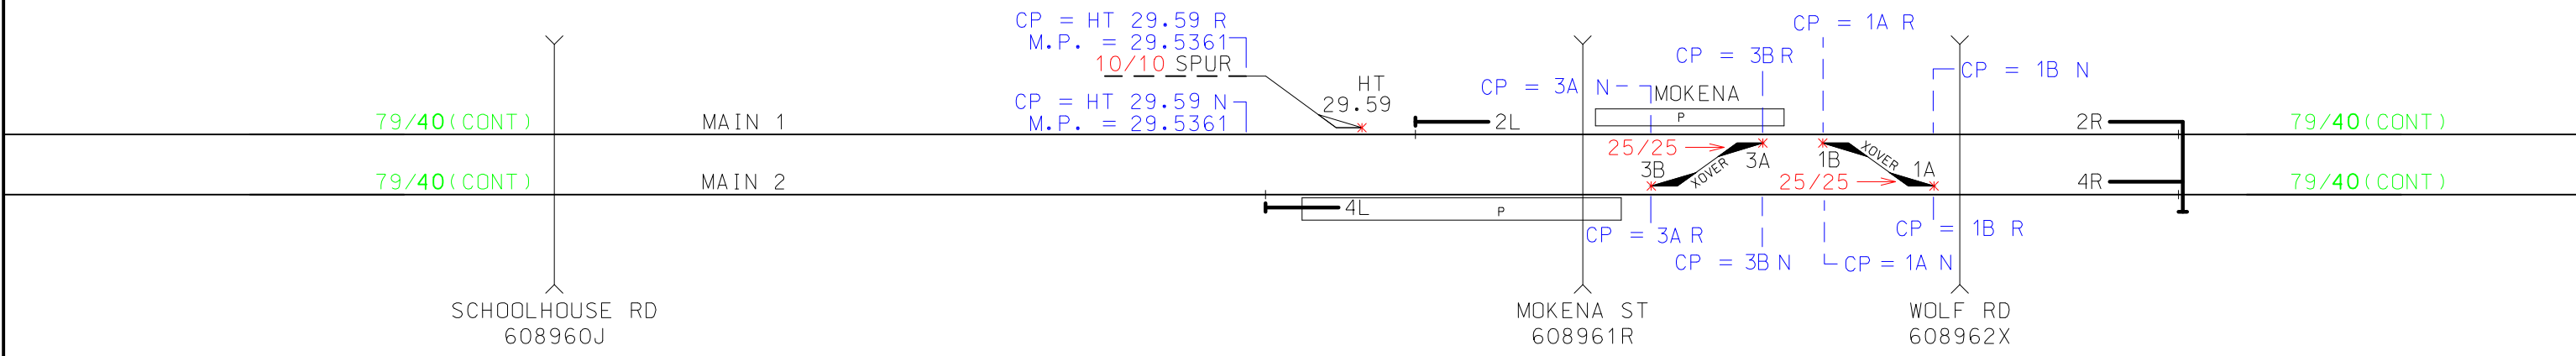

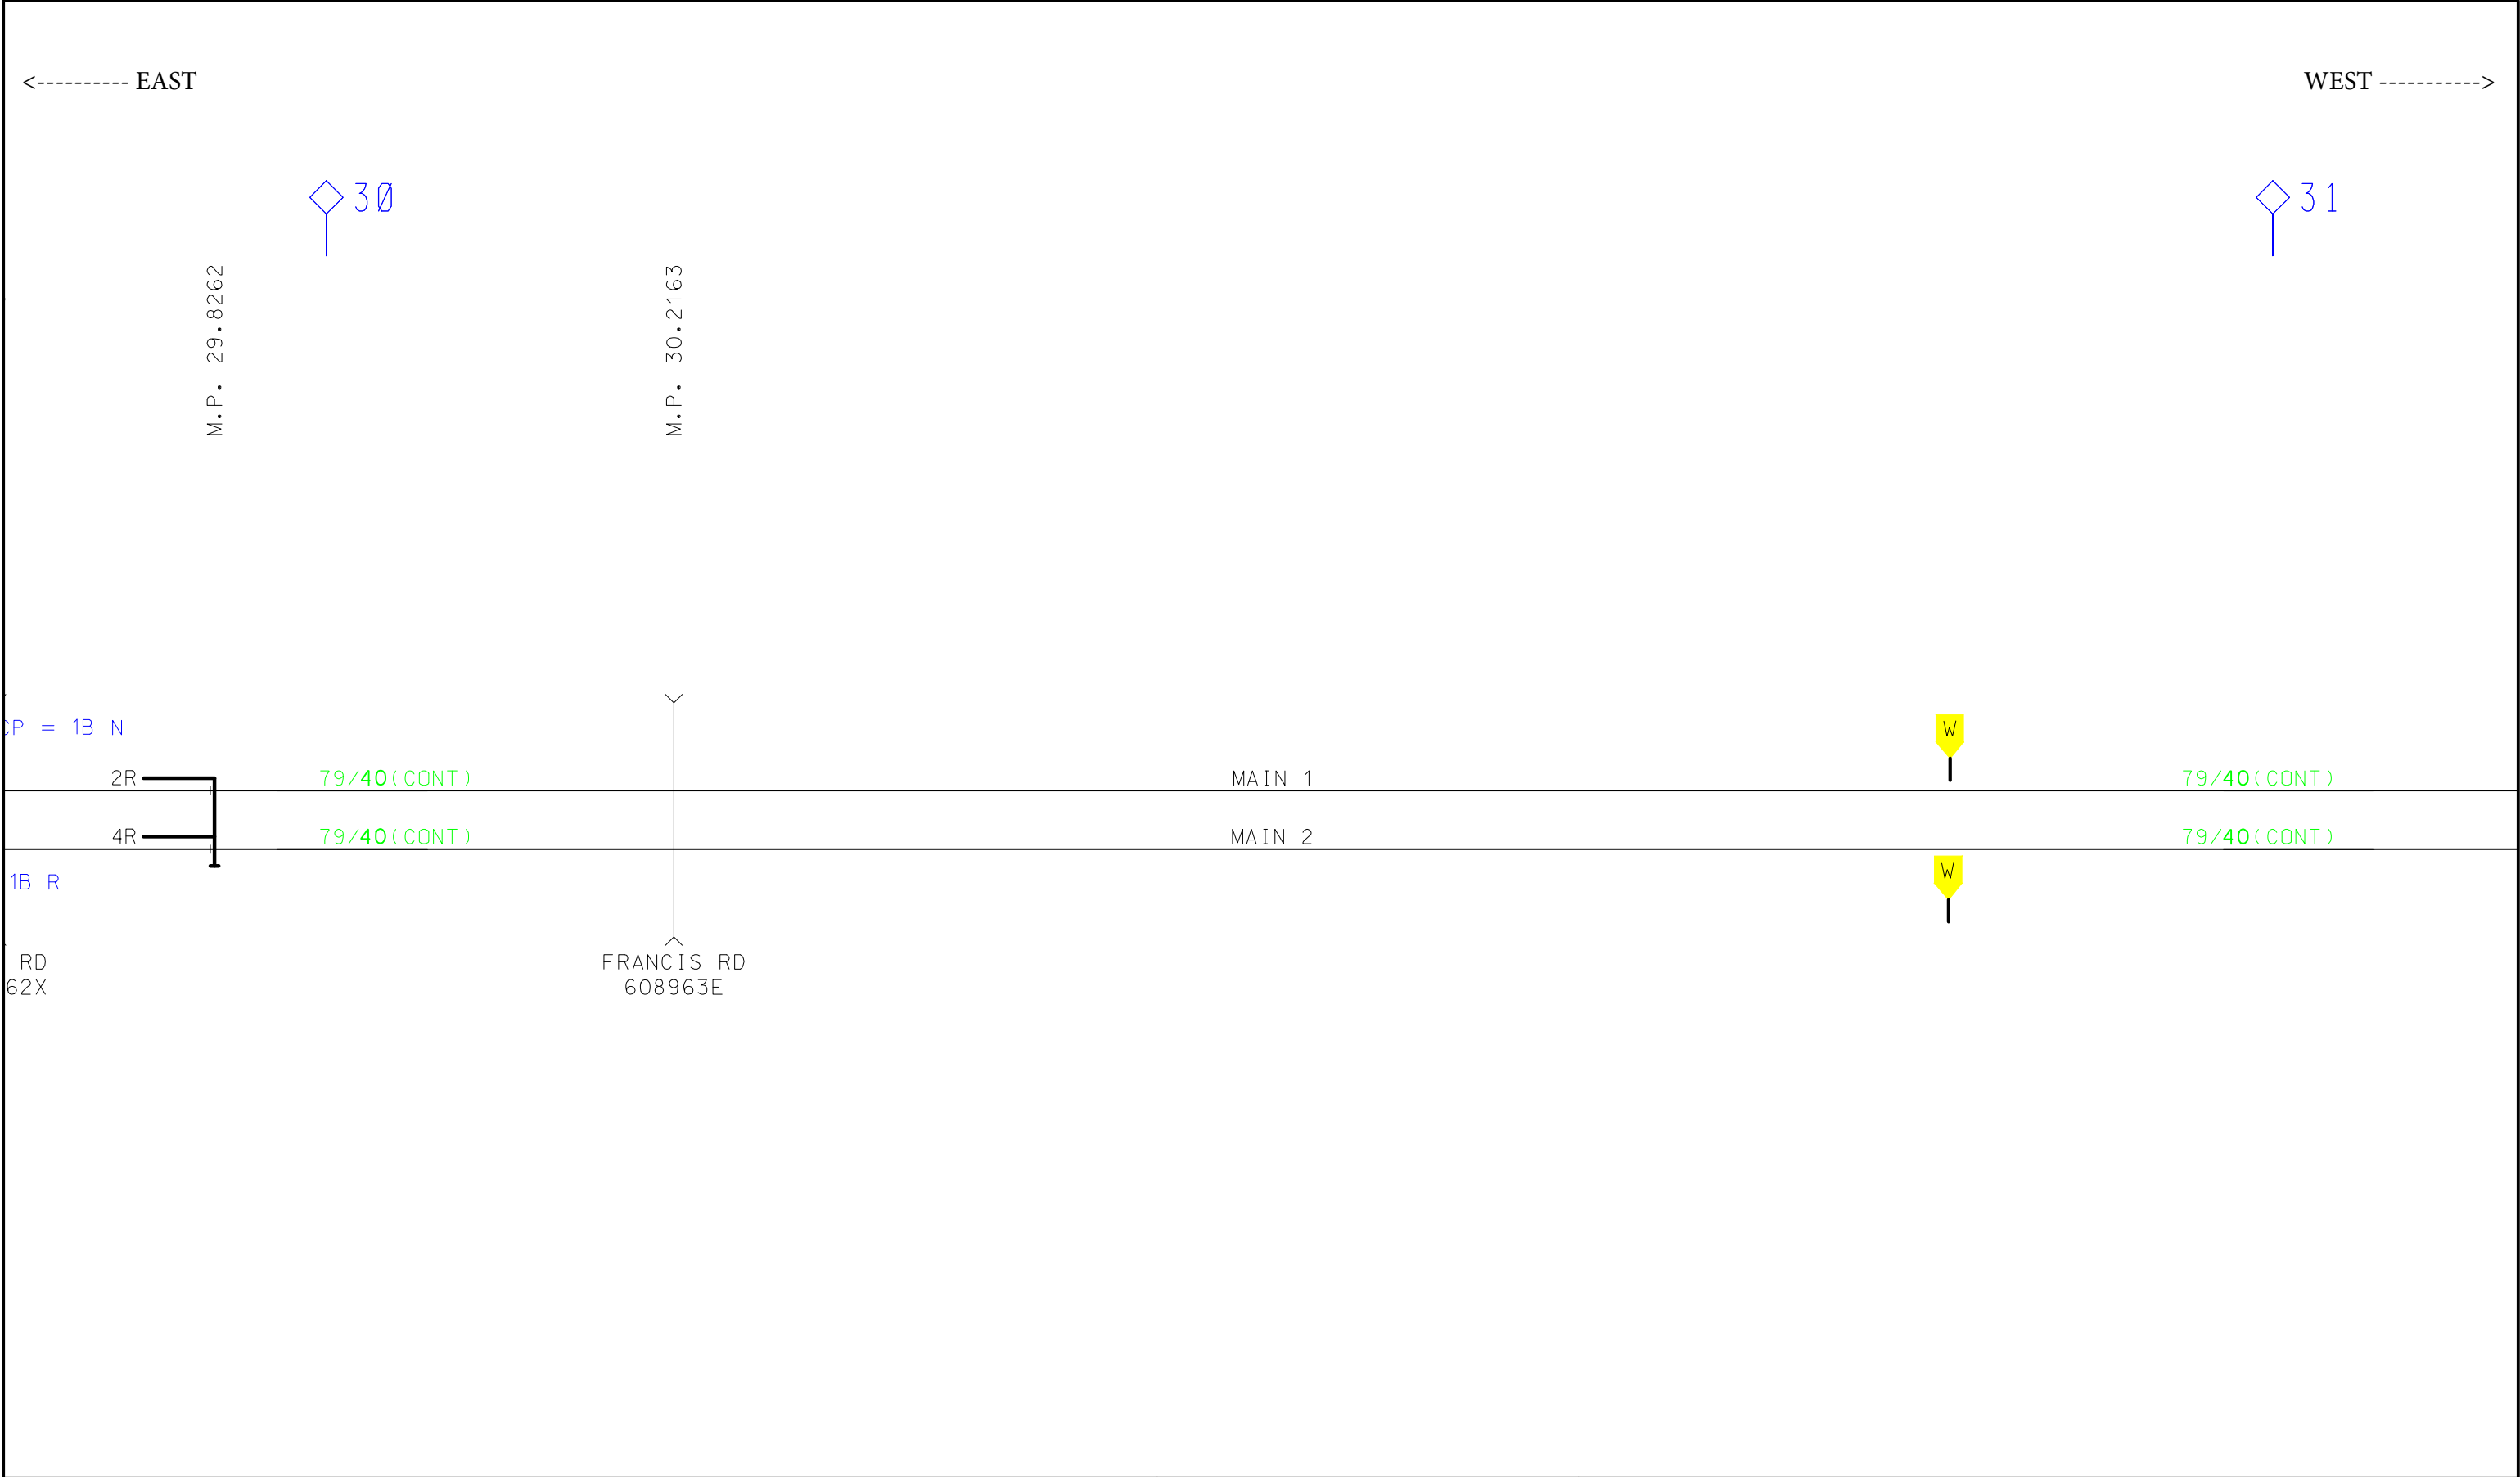

<----- EAST


WEST ----->



M.P. 31.638

M.P. 31.641


M.P. 31.99

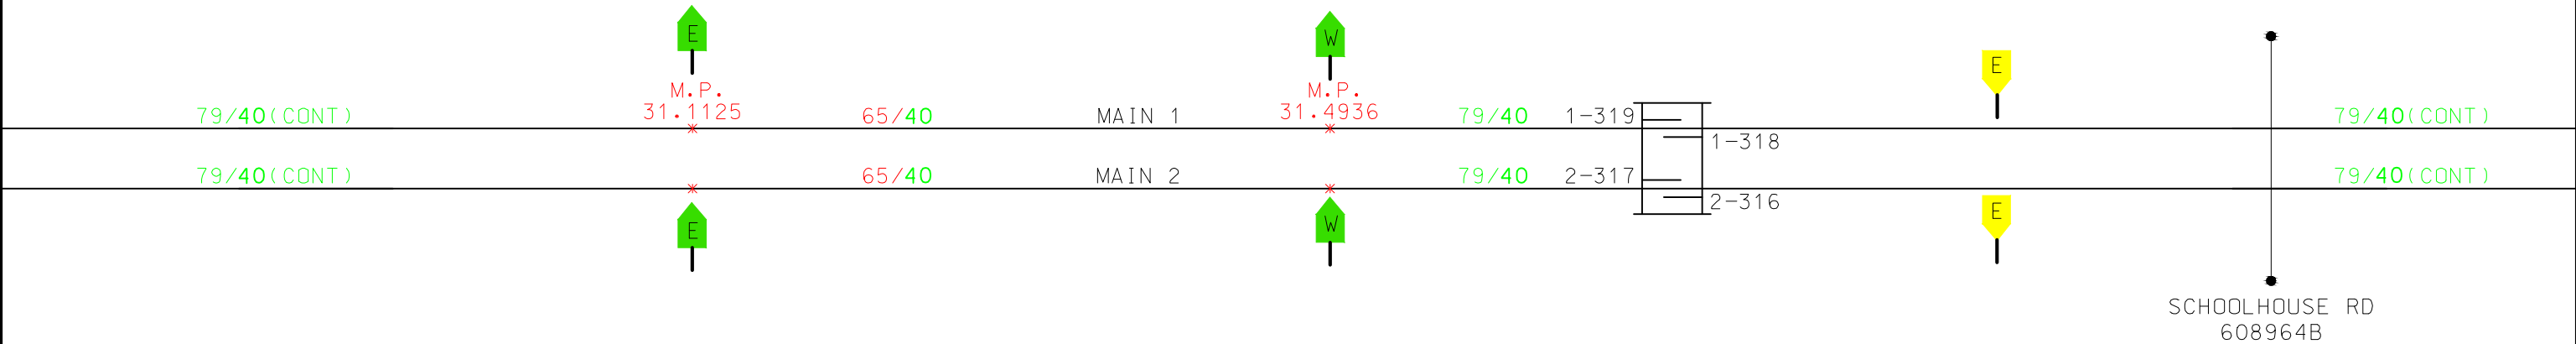

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.31.0 - 32.0	SHEET NO. 32
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJ&				


<----- EAST

WEST ----->

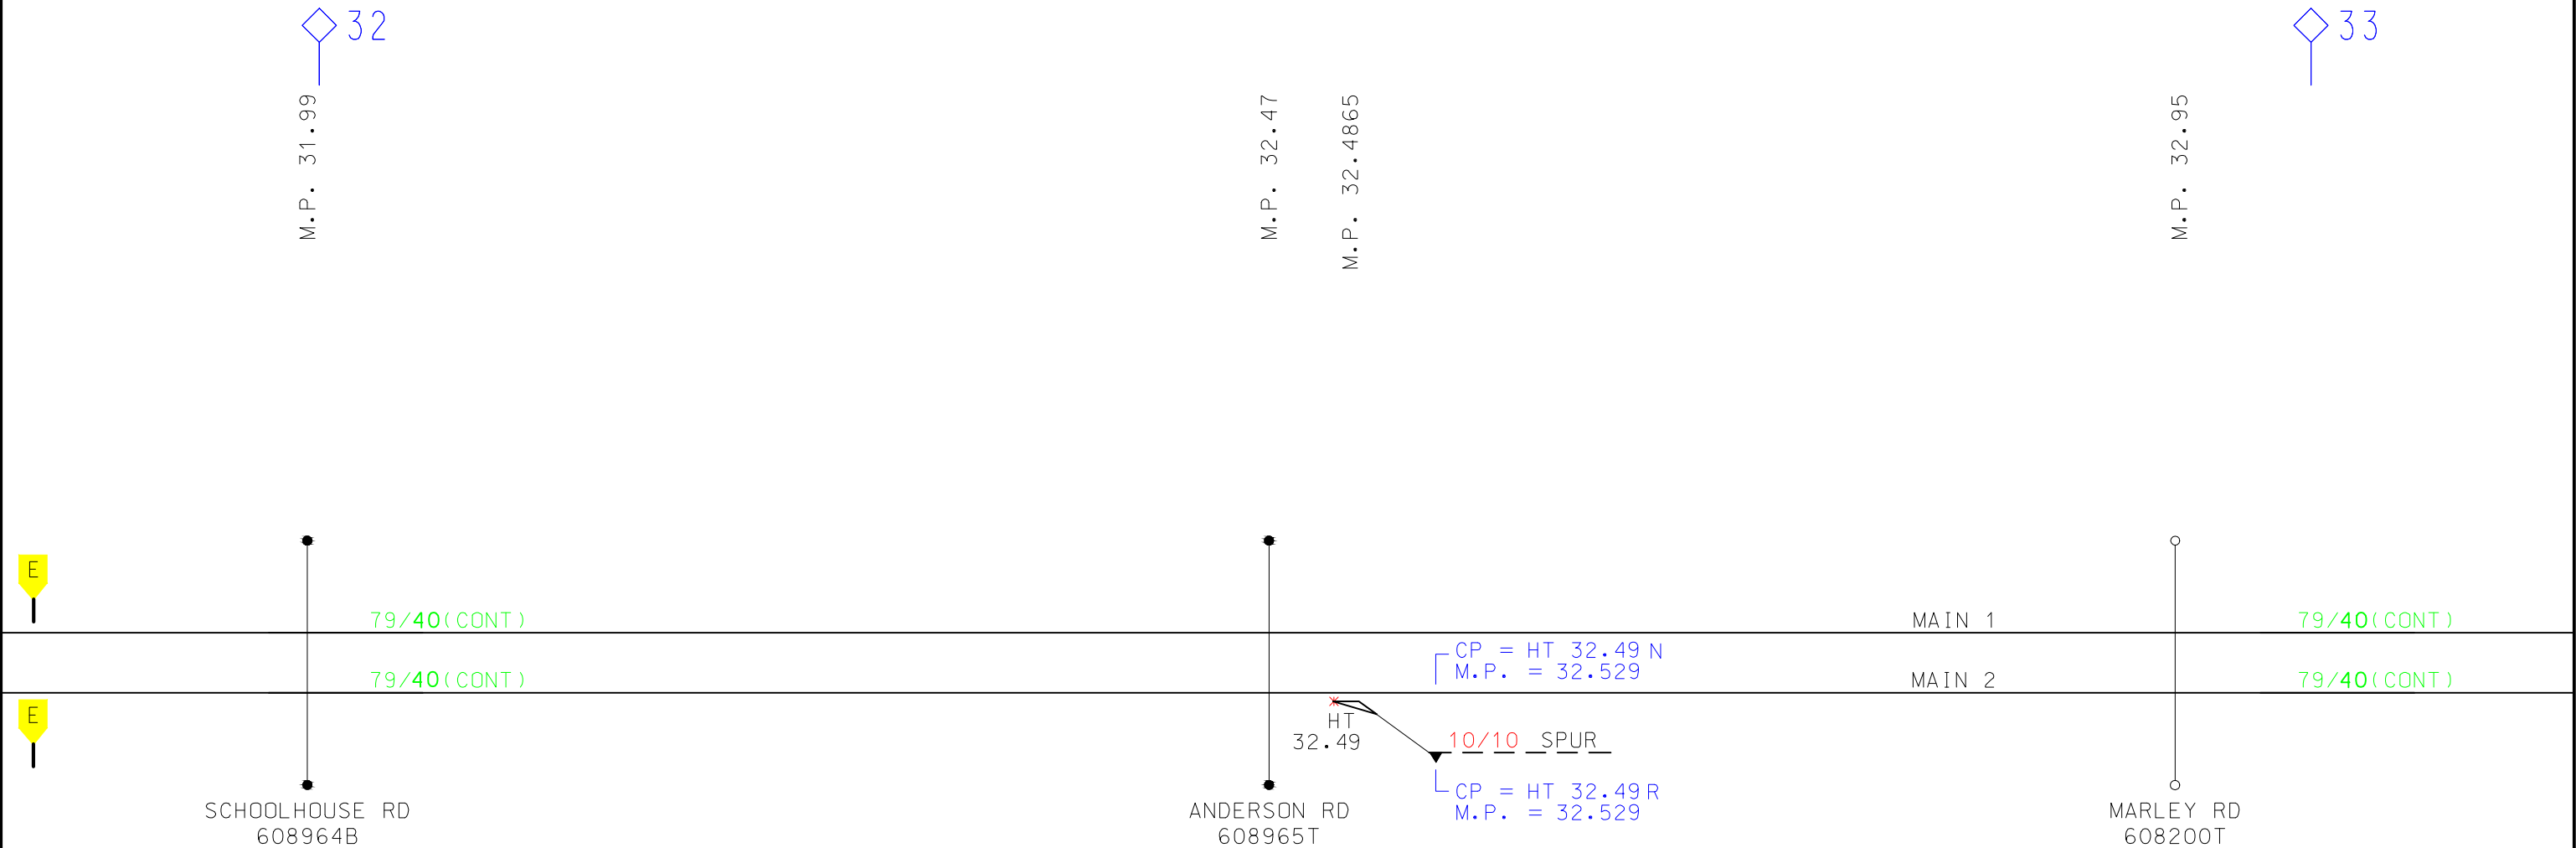


<----- EAST

WEST ----->

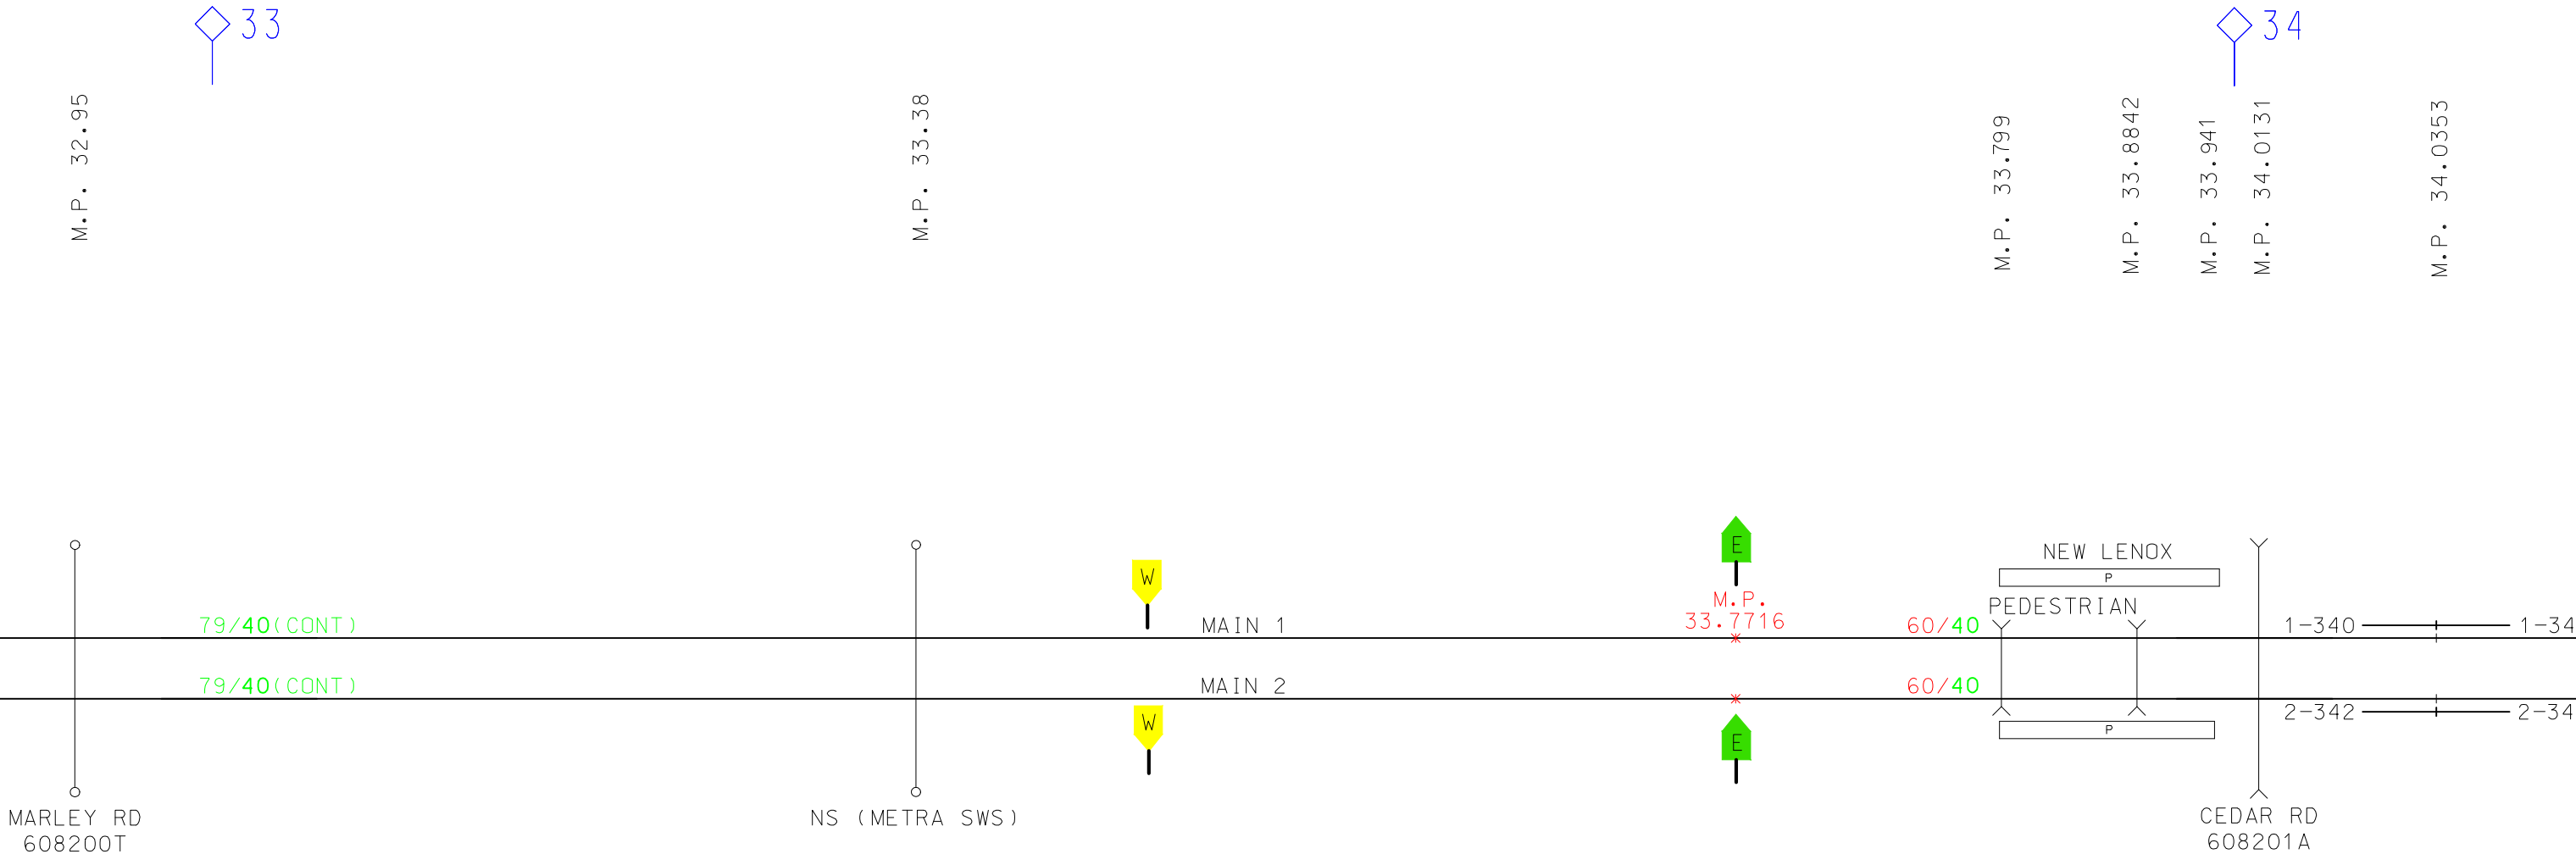

<----- EAST



WEST ----->

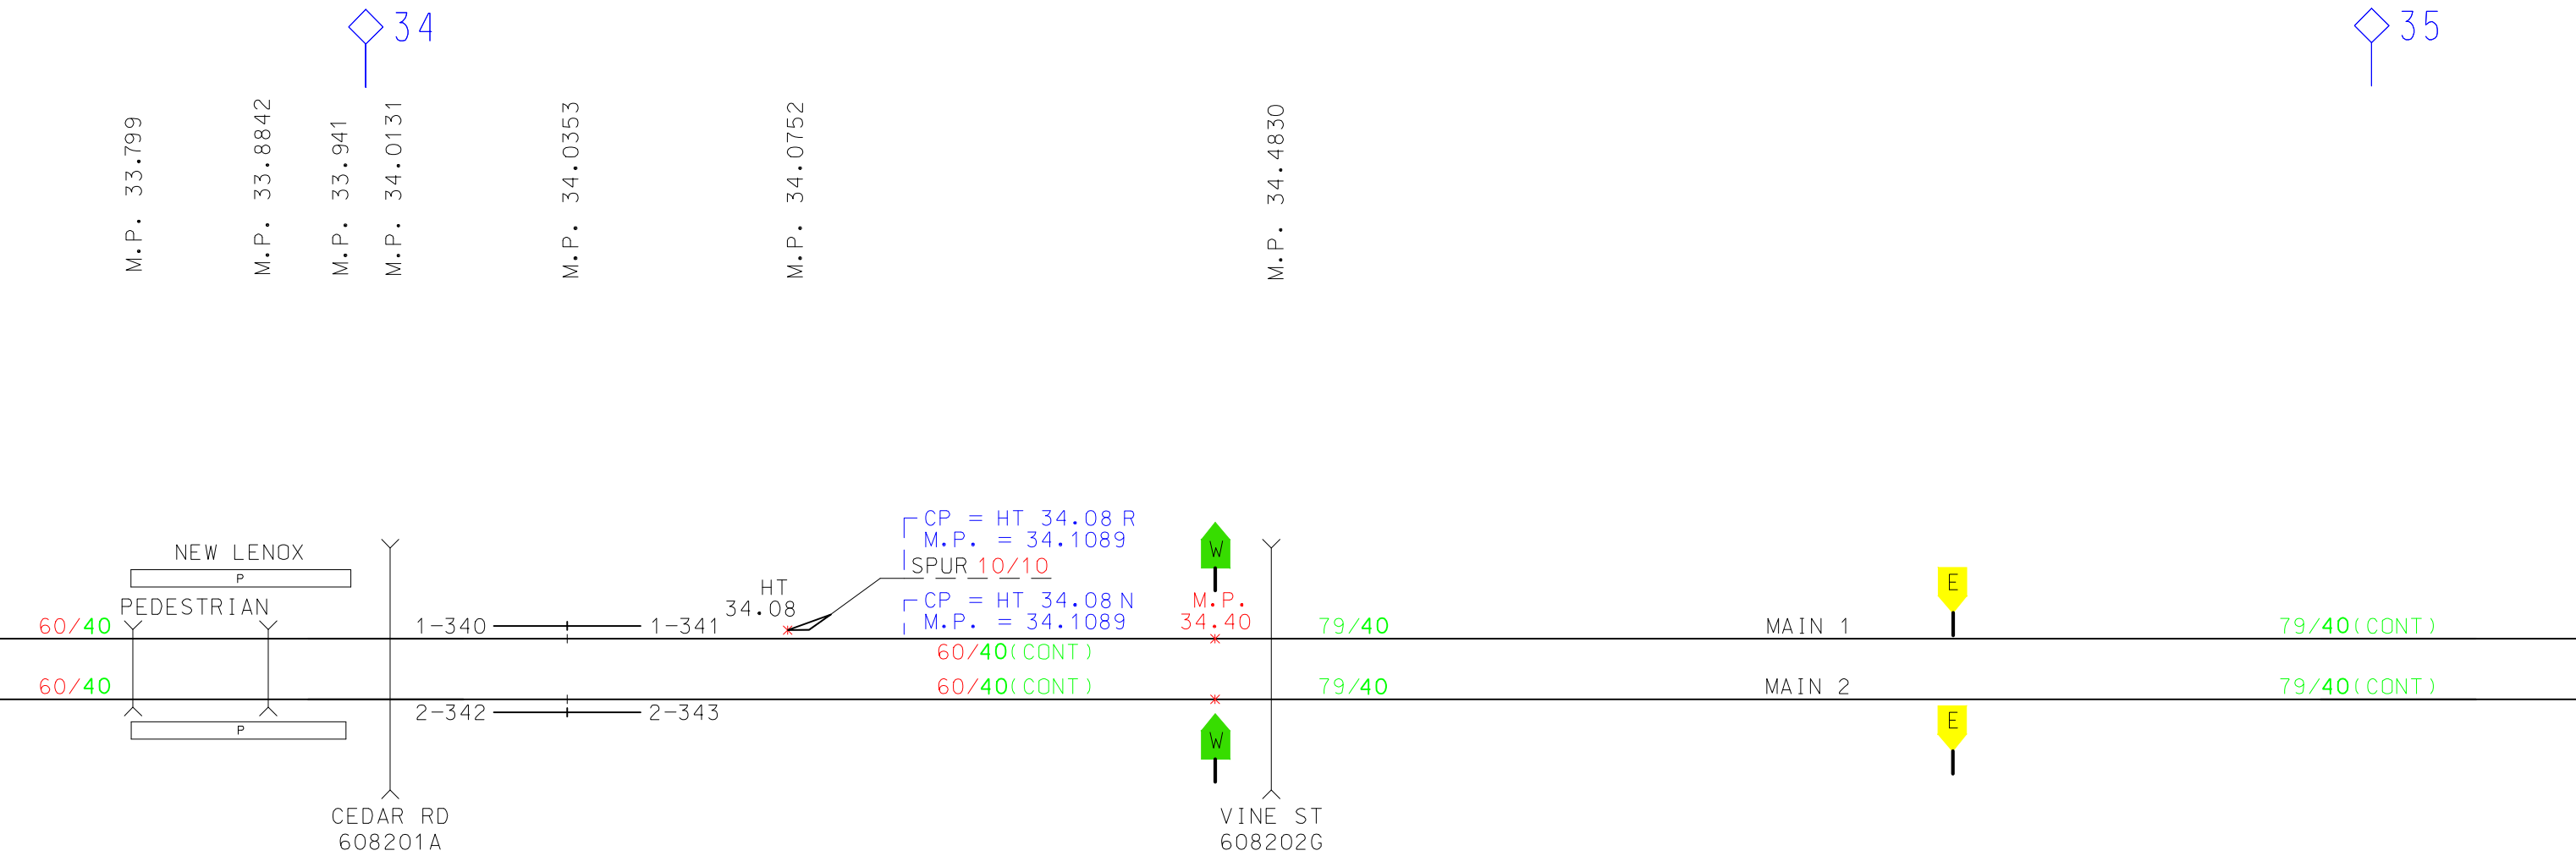

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.34.0 - 35.0	SHEET NO. 35
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJ				

<----- EAST

WEST ----->



M.P. 35.304
M.P. 35.3435

M.P. 35.3488

M.P. 35.40
M.P. 35.42


M.P. 35.4387

M.P. 35.4972

M.P. 35.5012

M.P. 36.1216

"CP 35.5"
(35.5)

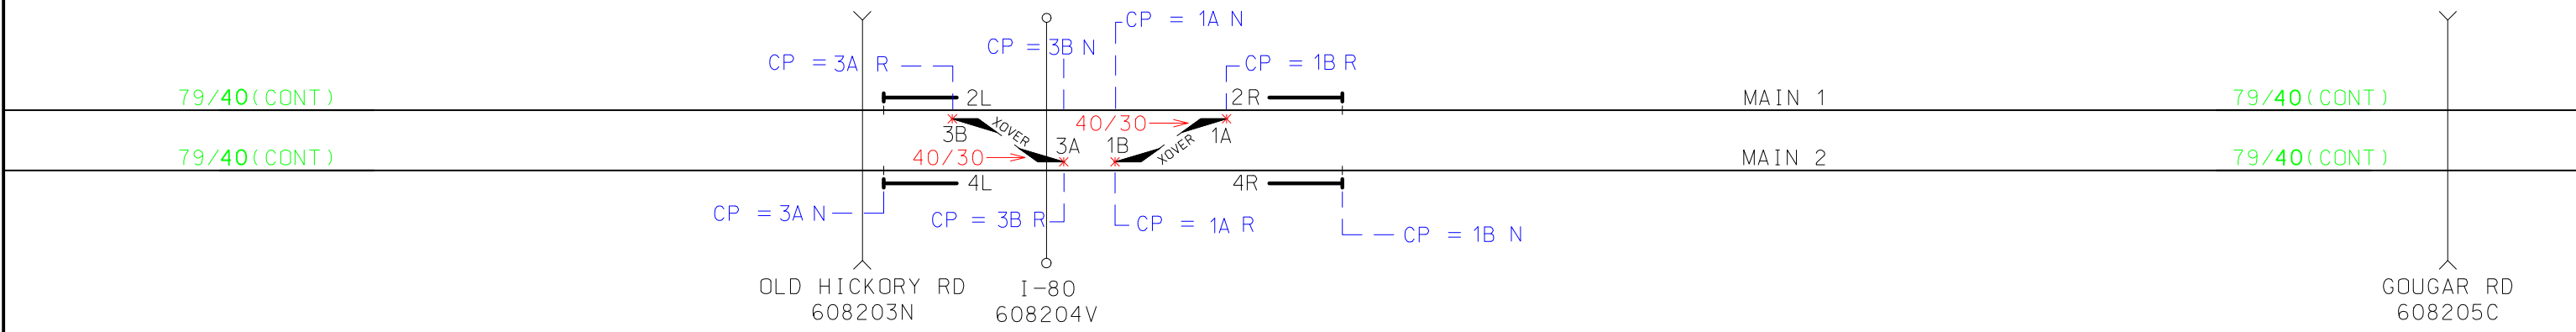

<----- EAST


WEST ----->

36

M.P. 36.1216

37



M.P. 37.1075

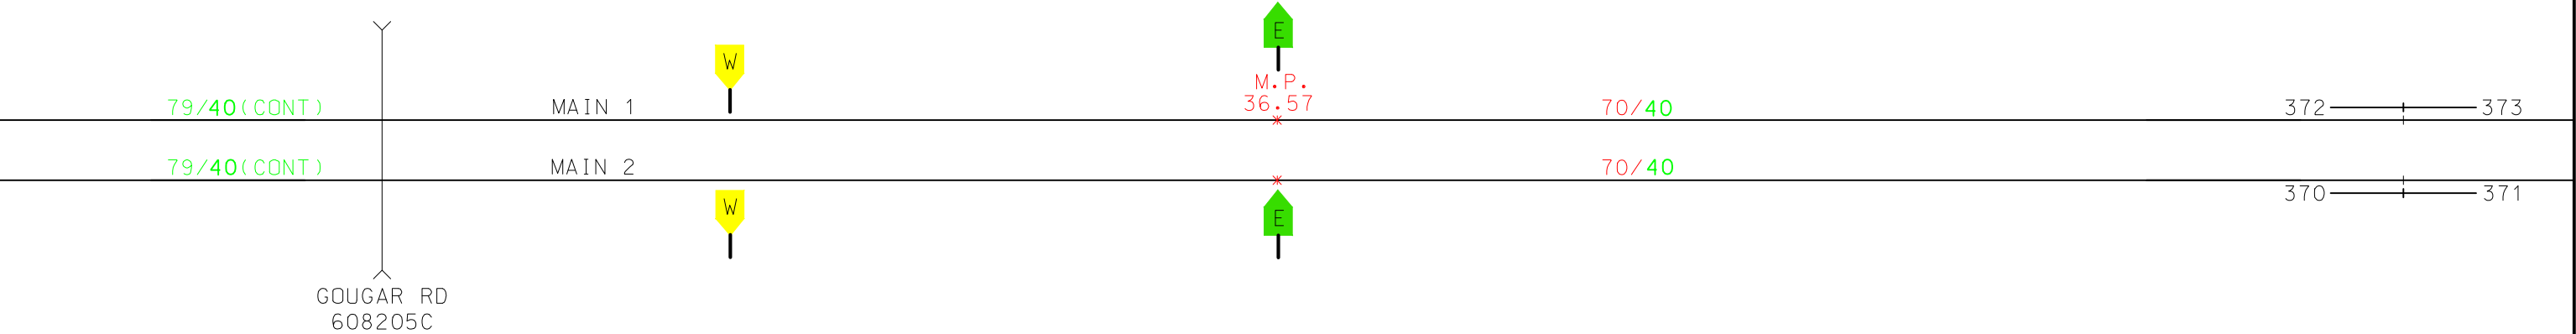

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.36.0 - 37.0	SHEET NO. 37
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJ				

<----- EAST

WEST ----->




M.P. 37.1075

M.P. 37.87

372 ——— 373

70/40 (CONT)

MAIN 1



79/40



370 ——— 371

70/40 (CONT)

MAIN 2



79/40



CASS ST
608207R


B

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJA

DISCLOSURE:
CHARTS ARE A VISUAL REPRESENTATION OF
THE SUBDIV AND ARE TO BE USED FOR PTC
SUBDIV PURPOSES ONLY



METRA SUBDIV FILE
MASTER DRAWING
JOLIET SUB
ILLINOIS
M.P.37.0 - 38.0

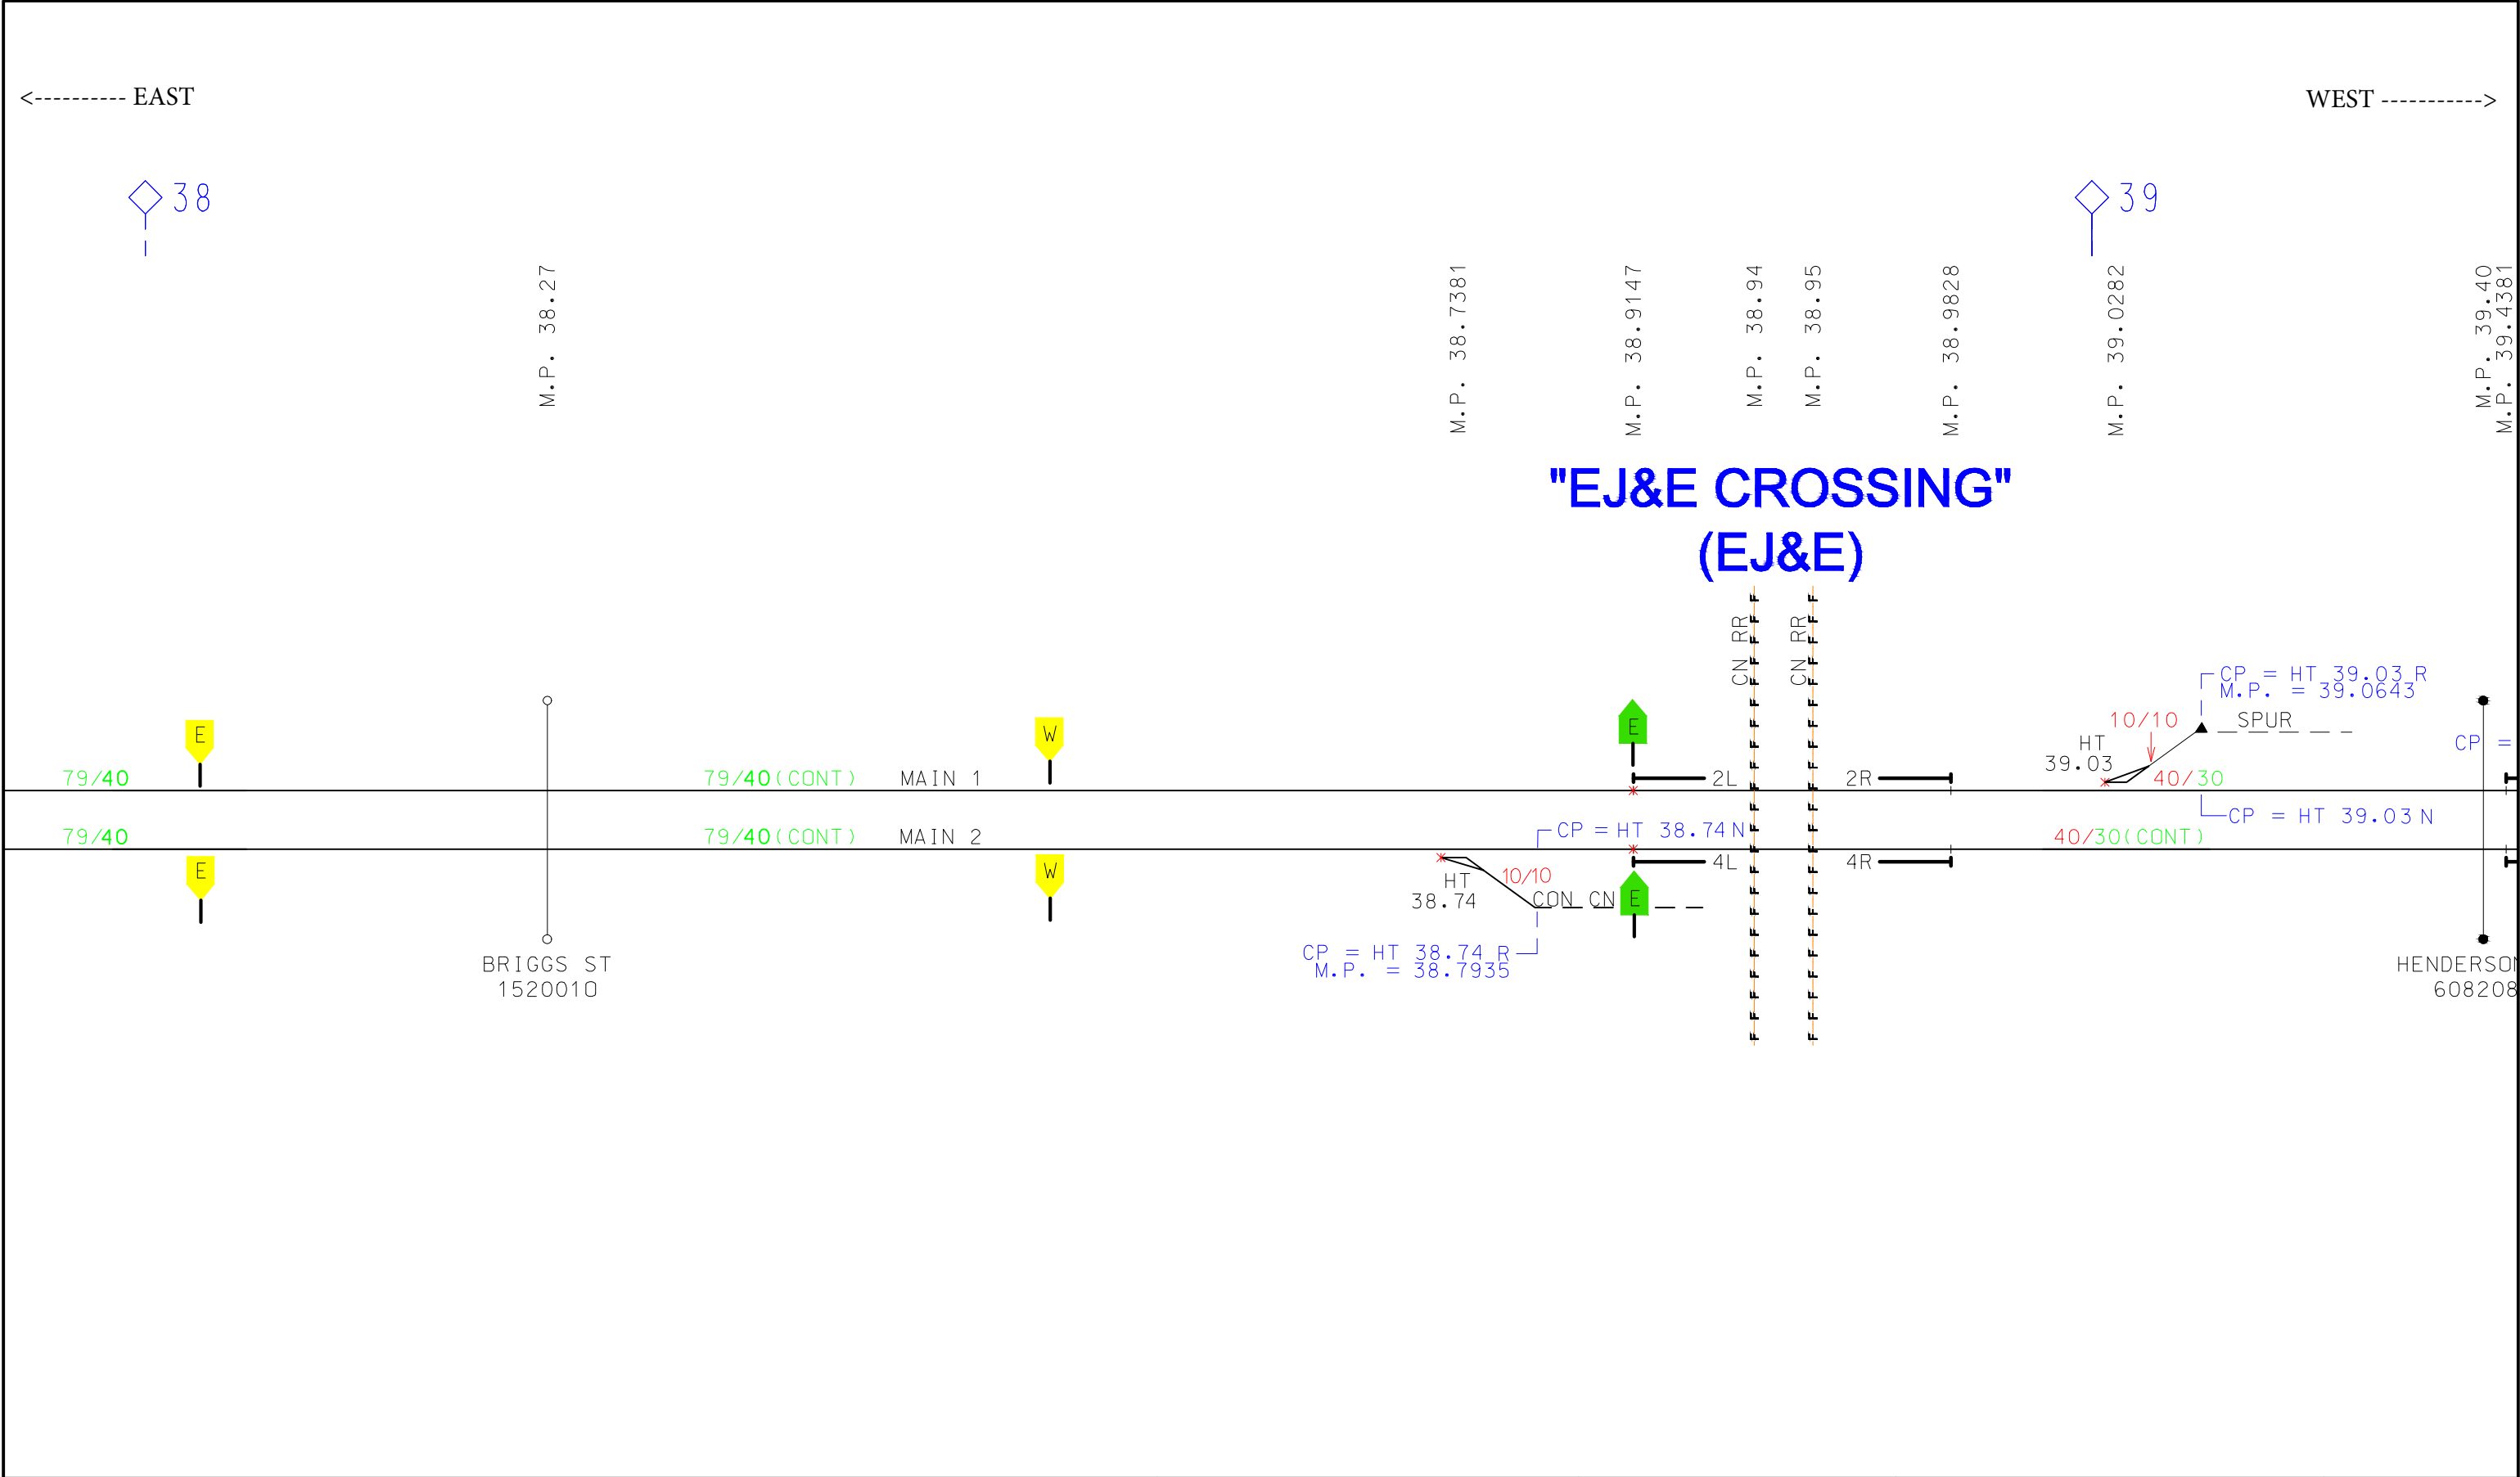

REV.	DATE	BY	DESCRIPTION	REV.	DATE	BY	DESCRIPTION	DISCLOSURE: CHARTS ARE A VISUAL REPRESENTATION OF THE SUBDIV AND ARE TO BE USED FOR PTC SUBDIV PURPOSES ONLY	Metra 547 W. JACKSON BLVD. CHICAGO, IL. 60661	METRA SUBDIV FILE MASTER DRAWING JOLIET SUB ILLINOIS M.P.38.0 - 39.0	SHEET NO. 39
29	10/05/22	JA	REVISED PER CHANGES TO CP WESTERN, INTERCHANGE AND ROBBINS	34	09/17/24	JE	REVISED PER 16TH ST DIAMOND REPLACEMENT				
30	12/21/22	JE	REVISED PER CHANGES TO SPEED OF XOVER 115 AT WESTERN	35	11/11/24	JE	REVISED PER SPEED CHANGE TO 10 MPH ACROSS UD TOWER DIAMONDS				
31	05/05/23	JA	REVISED NONCOMM TRACK AT CHI TERM & SPEED AT WESTERN 115 XOVER	36	01/08/25	JE	REVISED PER AUDIT RUN CHANGES, CRs for PEDs and PLATFORMS				
32	01/08/24	JE	REVISED PER CF AUDIT CHANGES AT 80TH AVE AND 105TH ST	37	02/04/25	ES	REVISED TO UPDATE SWITCHES TO ELECTRIC LOCK				
33	01/08/24	JA	REVISED PER REMOVAL OF CON1SCAL TRACK AT 16TH ST	38	02/06/25	JE	REVISED TO UPDATE FREIGHT SPEEDS TO 40MPH BETWEEN ROBBINS & EJ&E				

<----- EAST

WEST ----->

M.P. 39.7286

M.P. 39.7756

M.P. 39.7819

M.P. 39.8065

M.P. 39.8088

M.P. 39.8357

M.P. 39.8491

M.P. 39.9019
M.P. 39.91
M.P. 39.9982

M.P. 40.0487

M.P. 40.1672
M.P. 40.1085
M.P. 40.1178

M.P. 40.1199

M.P. 40.12

M.P. 40.1897

M.P. 40.30

M.P. 40.58
M.P. 40.60

"CP RICHARDS ST"
(Rich)

"UD INTERLOCKING"
(UD)

